

# **VA FileMan**



## **User Manual**

**Version 22.0**

**March 1999**

**Revised February 2013**

**Department of Veterans Affairs (VA)**

**Office of Information and Technology (OIT)**

**Product Development (PD)**



# Revision History

Date	Revision	Description	Author
02/20/2013	9.0	<p>Tech Edit:</p> <ul style="list-style-type: none"> <li>• Renamed this document to "VA FileMan User Manual." VA FileMan 22.2 will include a new "VA FileMan Getting Started Guide" that will be oriented to the first-time/novice user of VA FileMan; whereas this manual is oriented to the more experienced VA FileMan user.</li> <li>• Reformatted document to follow current style guide: <ul style="list-style-type: none"> <li>○ Updated Title Page: Reordered titles and replaced "Vista" logo with "VA Seal" image.</li> <li>○ Updated styles formats.</li> </ul> </li> <li>• Added links to all internal section references.</li> <li>• Verified all images have alternate text.</li> <li>• Updated documentation for DI*22.0*169: <ul style="list-style-type: none"> <li>○ Updated <a href="#">Table 9</a>.</li> <li>○ Added the "Print the Document" entry.</li> </ul> </li> <li>• Updated many images to be formatted text screen captures rather than GUI images of screen text for Section 508 conformance.</li> </ul>	<p>T. Blom G. Beuschel M. Ogi</p>
06/--2009		<p>Remedy Ticket 304834: Replace accent grave mark (`), which was being used incorrectly to signify <b>NOT</b>, with the single quote mark (').</p>	<p>Susan Strack &amp; Gary Beuschel, both from Oakland OIFO; Jack Schram, Project Manager; Oakland OIFO</p>
06/--2006		<p>Update documentation to make current with online format of the same manual at: <a href="http://vista.med.va.gov/fileman/docs/u1/index.shtml">http://vista.med.va.gov/fileman/docs/u1/index.shtml</a></p>	<p>Susan Strack, Oakland OIFO; Jack Schram, Project Manager; Oakland OIFO</p>
12/20/2004		<p>Updated documentation in compliance with new conventions for displaying TEST data. See <a href="#">Orientation</a> section for details.</p>	<p>Susan Strack, Oakland OIFO</p>
03/--1999		<p>Version 22.0 release.</p>	<p>Tami Winn, San Francisco ISF; Michael Ogi, San Francisco ISF; Thom Blom, San Francisco ISF</p>

## Revision History



**REF:** For the current patch history related to this software, see the Patch Module (i.e., Patch User Menu [A1AE USER]) on FORUM.

# Contents

Revision History .....	iii
Figures and Tables .....	xi
Orientation .....	xvii
<b>1 Introduction .....</b>	<b>1</b>
1.1 Fields, Records, and Files.....	1
1.2 Files and the Database.....	2
1.3 Printing Records from Files .....	3
1.4 Adding and Editing Records .....	3
1.5 LAYGO File Access .....	4
1.6 Scrolling Mode vs. Screen Mode .....	4
<b>2 Displaying Information.....</b>	<b>6</b>
<b>3 Inquire.....</b>	<b>8</b>
3.1 Inquire to File Entries Option.....	9
3.1.1 Standard Caption Output.....	10
3.1.2 Computed Fields .....	10
3.1.3 Audit Trails .....	10
3.2 SORT Templates .....	10
3.3 Choose Your Own Print Fields .....	11
3.4 Choose Your Own Device.....	12
<b>4 Print.....</b>	<b>14</b>
4.1 How to Print Reports from Files .....	14
4.2 VA FileMan's Print Capabilities.....	14
4.3 Standard Column Format for VA FileMan Prints .....	15
4.4 Sorting.....	16
4.4.1 Specifying SORT BY Fields.....	16
4.4.2 Sorting Order.....	17
4.4.3 Choosing Print Fields.....	24
4.4.4 Other Print Features .....	32

<b>5</b>	<b>Search</b> .....	<b>37</b>
5.1	How to Search .....	37
5.2	Search Steps .....	38
5.2.1	Enter Conditions .....	38
5.2.2	Combine Conditions .....	40
5.2.3	Format Output .....	42
5.3	Details and Features .....	43
5.3.1	Sorting and Searching .....	43
5.3.2	SEARCH Templates .....	43
5.3.3	Internal vs. External Field Values for Search Conditions .....	45
5.3.4	Print Number of Matches Found .....	45
5.3.5	Searching Multiples .....	46
<b>6</b>	<b>Browser</b> .....	<b>49</b>
6.1	Browser Screen .....	50
6.2	Browser Features .....	50
6.2.1	Cursor Movement (Navigation Keystrokes) .....	51
6.2.2	Clipboard .....	52
6.2.3	Search .....	53
6.2.4	Online Help .....	53
6.2.5	Other Features .....	54
6.2.6	The Browser as an Option .....	55
<b>7</b>	<b>Editing Records</b> .....	<b>57</b>
<b>8</b>	<b>VA FileMan Prompts</b> .....	<b>59</b>
8.1	The <Enter> Key .....	59
8.2	Standard Prompt Structure .....	60
8.3	Responding to Prompts .....	60
8.4	Getting Online Help at Any Prompt (Enter ? or ??) .....	61
8.5	Incorrect Responses .....	61
8.6	Partial Responses .....	62
8.7	Default Responses .....	62
8.8	Longer Default Responses and the "Replace...With" Editor .....	63
8.9	Prompts with a List of Choices .....	65

8.10	Key Fields .....	66
8.11	Special Responses to Field Prompts.....	67
8.11.1	Deleting a Field's Value (@).....	67
8.11.2	Jumping to Another Field with the Caret ("^") .....	67
8.11.3	Exiting with the Caret ("^") .....	68
8.11.4	Exiting with the Caret (^).....	68
8.11.5	Mandatory (Required) Fields.....	68
8.11.6	Spacebar Recall.....	69
8.11.7	Typical Data Entry Session.....	70
<b>9</b>	<b>Field Types .....</b>	<b>73</b>
9.1	DATE/TIME Fields.....	74
9.1.1	Acceptable Formats for Entering Dates .....	74
9.1.2	Abbreviations for Dates .....	75
9.1.3	Times in DATE/TIME Fields .....	75
9.1.4	Abbreviations for Times .....	76
9.2	NUMERIC Fields.....	76
9.3	SET OF CODES Fields.....	77
9.3.1	Internal vs. External Values for SET OF CODES Fields .....	77
9.4	FREE TEXT Fields .....	78
9.5	WORD-PROCESSING Fields .....	78
9.6	COMPUTED Fields .....	80
9.7	POINTER TO A FILE Fields.....	81
9.8	VARIABLE-POINTER Fields.....	82
9.9	Subfiles (Multiples).....	84
<b>10</b>	<b>Adding and Deleting Records.....</b>	<b>87</b>
10.1	.01 Field.....	87
10.2	How to Add a Record.....	87
10.3	Adding a Duplicate Record (Use Quotes).....	88
10.4	How to Delete a Record .....	88
10.5	Repointing When Deleting Records.....	89
10.6	Adding Records to a POINTER TO A FILE Field .....	91
10.6.1	Adding Duplicate-Named Entries .....	92
10.7	Adding and Deleting from Multiples .....	93

10.8	Enter or Edit File Entries Option.....	94
<b>11</b>	<b>ScreenMan .....</b>	<b>97</b>
11.1	Scrolling Mode Editing vs. Screen Mode Editing.....	97
11.1.1	Similarities .....	97
11.1.2	Differences .....	97
11.2	ScreenMan Screen.....	98
11.3	Cursor Movement (Navigation Keystrokes) .....	99
11.3.1	How to Navigate Between Fields.....	99
11.3.2	How to Navigate Between Pages .....	100
11.3.3	Saving and Exiting .....	100
11.3.4	Command Line Options (SAVE, EXIT, etc.) .....	101
11.4	Editing.....	102
11.4.1	How to Edit Fields .....	102
11.4.2	Long Fields (and the Zoom Editor).....	104
11.4.3	WORD-PROCESSING Fields.....	104
11.4.4	Multiples .....	104
11.4.5	Navigational Keys for Repeating Blocks .....	108
11.5	Details.....	108
11.5.1	How to File Edits .....	108
11.5.2	Troubleshooting .....	109
<b>12</b>	<b>WORD-PROCESSING Fields.....</b>	<b>110</b>
<b>13</b>	<b>Choice of Word-processing Editors .....</b>	<b>112</b>
13.1	How to Select Your Preferred Editor .....	112
13.2	Switching to Another Editor While Editing .....	113
<b>14</b>	<b>Screen Editor .....</b>	<b>114</b>
14.1	Screen Editor Screen .....	115
14.2	Entering Text.....	115
14.3	Entering Commands .....	115
14.4	Cursor Movement (Navigation Keystrokes) .....	116
14.5	Saving and Exiting .....	117
14.6	Finding Text .....	117
14.7	Formatting Paragraphs .....	118



14.8	Cutting and Pasting .....	119
14.9	Deleting .....	120
14.10	Settings/Modes .....	121
14.11	Troubleshooting.....	122
14.11.1	Terminal Type Setting .....	122
14.11.2	<PF> Keys Not Working: How to Exit.....	122
14.12	Screen Editor and Personal Computers .....	123
14.12.1	Pasting and Uploading .....	123
14.12.2	Symbol Characters .....	123
14.12.3	Files: Save as Text .....	123
14.12.4	Wrap Vs. No Wrap.....	123
14.12.5	Avoiding Lost Characters .....	124
<b>15</b>	<b>Line Editor .....</b>	<b>126</b>
15.1	Recognizing the Line Editor.....	126
15.2	How to Enter Text in the Line Editor.....	127
15.3	Revising Existing Text .....	127
15.3.1	Shortcut: Enter Line Number to Edit at "EDIT Option:" Prompt .....	128
15.4	"Replace...With" Edits: Be Careful .....	128
15.4.1	Shortcuts at the "Replace...With" Prompt .....	129
15.4.2	"Replace..." Prompt Shortcuts.....	129
15.5	Commands.....	130
15.5.1	Available Commands .....	130
15.5.2	LIST: List the Message .....	130
15.5.3	ADD: Append More Text .....	131
15.5.4	JOIN: Combine Two Lines of Text .....	131
15.5.5	INSERT: Insert New Line(s) of Text Between Existing Ones .....	131
15.5.6	DELETE: Delete a Line or Lines.....	132
15.6	Advanced Features .....	132
15.6.1	File Transfer (Use When Uploading ASCII Text).....	132
15.6.2	Text Terminator-String Change .....	133
15.6.3	Programmer Edit (Edit Lines with M Commands) .....	134
15.6.4	Editor Change: Switch Editors.....	134
15.6.5	Transfer Text (from Another WORD-PROCESSING Field) .....	135
	Glossary .....	138

Contents

Index ..... 146

# Figures and Tables

## Figures

Figure 1: Example showing several patient records .....	1
Figure 2: Representation of a database .....	2
Figure 3: Example of a printed report.....	3
Figure 4. Inquire—Dialogue using the Inquire to File Entries option: Sample user entries at prompts and sample report.....	9
Figure 5: Inquire—Prompt to store entries into a template.....	10
Figure 6: Inquire—Dialogue to choosing your own print fields: Sample user entries at prompts.....	11
Figure 7: Inquire—Dialogue choosing a device <i>and</i> getting STANDARD CAPTIONED OUTPUT: Sample user entries at prompts.....	12
Figure 8: Print—An Example of a Standard Printout .....	15
Figure 9: Print—Dialogue encountered when creating a printed report: Sample user entries at prompts..	15
Figure 10: Print—Dialogue specifying a sort order for a printed report: Sample user entries at prompts .	16
Figure 11: Print—Example of a printed report in a specific order .....	16
Figure 12: Print—Sorting canonic and non-canonic numbers .....	17
Figure 13: Print—Specifying a sort range .....	18
Figure 14: Print—Choosing entries with a specific value .....	18
Figure 15: Print—Dialogue to include records with null values: Sample user entries at prompts .....	19
Figure 16: Print—Sample report displaying fields with null values.....	20
Figure 17: Print—Dialogue to create a Sort Template: Sample user entries at prompts .....	23
Figure 18: Print—Forcing the creation of a Sort template.....	23
Figure 19: Print—Reusing a Sort template .....	24
Figure 20: Print—Confirmation message to print all fields.....	24
Figure 21: Print—Stringing several print qualifiers together .....	27
Figure 22: Print—Obtaining a list of all Print templates for a file.....	28
Figure 23: Print—Creating a Print template .....	28
Figure 24: Print—Forcing the creation of a Print template.....	29
Figure 25: Print—Reusing a Print template.....	29
Figure 26: Print—Inserting a new print field.....	30
Figure 27: Print—Inserting a Multiple print field.....	30

Figure 28: Print—Choosing a Captioned Print template ..... 30

Figure 29: Print—Dialogue encountered when creating a Captioned Print report ..... 31

Figure 30: Print—Generating multiple copies of a report ..... 32

Figure 31: Print—Example of a report heading..... 32

Figure 32: Print—Dialogue to customize report headings: Sample user entries at prompts ..... 33

Figure 33: Print—Suppressing headings on a report ..... 33

Figure 34: Print—Confirming the suppression of headings in a Print template ..... 34

Figure 35: Print—Creating a Print template with a custom header ..... 34

Figure 36: Print—Selecting an existing Print template with a custom header..... 34

Figure 37: Print—Including a custom footer in a Print template..... 35

Figure 38: Print—Including a custom header and footer in a Print template ..... 35

Figure 39: Search—Example of a search condition..... 39

Figure 40: Search—Example of two truth tests ..... 39

Figure 41: Search—Example of a single search condition using a truth test..... 40

Figure 42: Search—Example of a multiple search condition using truth tests ..... 41

Figure 43: Search—Dialogue to a completed search: Sample user entries at prompts and sample report . 42

Figure 44: Search—Creating a Search template ..... 44

Figure 45: Search—Reusing a Search template at the "SEARCH FOR FIELD" prompt ..... 44

Figure 46: Search—Reusing a Search template at the "SORT BY" prompt ..... 44

Figure 47: Search—Dialogue of a search on a multiple field: Sample user entries at prompts..... 46

Figure 48: Search—Prompts encountered when searching on a Multiple field..... 47

Figure 49: Search—Additional prompts encountered when searching on a Multiple field..... 48

Figure 50: Browser—Sample screen component parts..... 50

Figure 51: VA FileMan Prompts—Sample component parts of a prompt ..... 60

Figure 52: VA FileMan Prompts—Asking for a response..... 60

Figure 53: VA FileMan Prompts—"Select-type" prompts, offering a choice ..... 61

Figure 54: VA FileMan Prompts—"Yes/No-type" prompts..... 61

Figure 55: VA FileMan Prompts—Dialogue to choose from a list in VA FileMan: Sample user entries at prompts..... 62

Figure 56: VA FileMan Prompts—Prompts with default responses ..... 62

Figure 57: VA FileMan Prompts—Overriding the default response to a prompt..... 62

Figure 58: VA FileMan Prompts—Long responses employing the "Replace...With" editor ..... 63

Figure 59: VA FileMan Prompts—Changing a long response using the "Replace...With" editor ..... 63

Figure 60: VA FileMan Prompts—Replacing an entire entry using the ellipsis (...). 63

Figure 61: VA FileMan Prompts—Deleting an entire entry using the at-sign (@)..... 64

Figure 62: VA FileMan Prompts—Displaying a list of choices ..... 65

Figure 63: VA FileMan Prompts—Displaying a subset of choices from a list..... 65

Figure 64: VA FileMan Prompts—Entering a duplicate compound key ..... 66

Figure 65: VA FileMan Prompts—Deleting a field entry ..... 67

Figure 66: VA FileMan Prompts—Using the caret ("^") key to "jump" to a specific field..... 67

Figure 67: VA FileMan Prompts—Using the caret ("^") key to exit a prompt ..... 68

Figure 68: VA FileMan Prompts—Using the "Spacebar Recall" functionality..... 69

Figure 69: VA FileMan Prompts—Example of a typical data entry session..... 70

Figure 70: Field Types—Entering a date at a DATE/TIME field ..... 74

Figure 71: Field Types—Entering a date and time ..... 75

Figure 72: Field Types—Example of a NUMERIC field ..... 76

Figure 73: Field Types—Example of a SET OF CODES field ..... 77

Figure 74: Field Types—Example of a FREE TEXT field..... 78

Figure 75: Field Types—Example of a FREE TEXT field with validation..... 78

Figure 76: Field Types—Example of a WORD-PROCESSING field, using the Screen Editor ..... 79

Figure 77: Field Types—Example of a WORD-PROCESSING field, using the Line Editor ..... 79

Figure 78: Field Types—Dialogue to choose a COMPUTED field: Sample user entries at prompts ..... 80

Figure 79: Field Types—Sample of a POINTER TO A FILE field ..... 81

Figure 80: Field Types—Dialogue showing help for entries in a VARIABLE-POINTER field: Sample user entries at prompts ..... 82

Figure 81: Field Types—Using the PREFIX and a question mark to get a list of entries in a pointed-to file ..... 83

Figure 82: Field Types—Searching for an entry in a pointed-to file ..... 83

Figure 83: Field Types—Adding a new entry to a pointed-to file ..... 83

Figure 84: Field Types—Sample Subfile (Multiple) field ..... 84

Figure 85: Field Types—Example of a Multiple field prompt ..... 84

Figure 86: Records—Dialogue to add a record: Sample user entries at prompts ..... 87

Figure 87: Records—Dialogue to add a duplicate record: Sample user entries at prompts..... 88

Figure 88: Records—Dialogue to delete a record: Sample user entries at prompts ..... 88

Figure 89: Records—Dialogue to delete a record and re-point to a different record: Sample user entries at prompts..... 89

Figure 90: Records—Dialogue showing a report of changed entries: Sample report..... 90

Figure 91: Records—Dialogue to add a new entry to a pointed-to file: Sample user entries at prompts ... 91

Figure 92: Records—Adding a duplicate-named entry to a pointed-to file ..... 92

Figure 93: Records—Adding an entry to both the current file and to a pointed-to file ..... 92

Figure 94: Records—Dialogue showing entries to a Multiple field: Sample user entries at prompts ..... 93

Figures and Tables

Figure 95: Records—Choosing a file to edit .....	94
Figure 96: Records—Choosing the file fields to edit.....	94
Figure 97: Records—Choosing specific file fields to edit .....	95
Figure 98: Records—Dialogue using the Enter or Edit File Entries option: Sample user entries at prompts.....	96
Figure 99: ScreenMan—Sample screen component parts and field values.....	98
Figure 100: ScreenMan—A "popup" subpage for a Multiple: Sample component parts and field values.....	105
Figure 101: ScreenMan—Dialogue showing a repeating block in a Multiple: Sample ScreenMan fields and field values .....	107
Figure 102: Screen Editor—Sample WORD-PROCESSING field in the Screen Editor: Sample component parts .....	115
Figure 103: Screen Editor—Dialogue to do a "FIND" while using the Screen Editor .....	118
Figure 104: Line Editor—Example of a WORD-PROCESSING field in the Line Editor .....	126
Figure 105: Line Editor—Prompts for entering word processing text.....	127
Figure 106: Line Editor—Completing your edits in the Line Editor.....	127
Figure 107: Line Editor—Shortcut to edit a specific line using the Line Editor .....	128
Figure 108: Line Editor—Example of an <i>incorrect</i> edit with the "Replace...With" editor.....	128
Figure 109: Line Editor—Using the ellipsis (...) to replace an entire line .....	129
Figure 110: Line Editor—Edit options available with the Line Editor.....	130
Figure 111: Line Editor—Example using the List a Range of Lines option.....	130
Figure 112: Line Editor—Example using the Add Lines to End of Text option .....	131
Figure 113: Line Editor—Example using the Join Line to the One Following option .....	131
Figure 114: Line Editor—Example using the Insert Line(s) after an Existing Line option.....	131
Figure 115: Line Editor—Example using the Delete Line(s) option .....	132
Figure 116: Line Editor—Example of entering M code while using the Y-Programmer Edit option.....	134
Figure 117: Line Editor—Dialogue of the Extended Pointer Syntax while using the Transfer Lines From Another Document option: Sample user entries at prompts (Example #1).....	135
Figure 118: Line Editor—Dialogue of the Extended Pointer Syntax while using the Transfer Lines From Another Document option: Sample user entries at prompts (Example #2).....	136
Figure 119: Line Editor—Example of a possible warning message when Using the Transfer Lines From Another Document option.....	136

## **Tables**

Table 1: Print—Sort Qualifiers .....	20
Table 2: Print—Print Qualifiers .....	25
Table 3: Search—Condition Tests .....	38
Table 4: Search—Condition Operators .....	40
Table 5: Browser—Navigation Keystrokes .....	51
Table 6: Browser—Using the Browser Clipboard .....	52
Table 7: Browser—Searching in the Browser .....	53
Table 8: Browser—Online Help .....	53
Table 9: Browser—Other Features .....	54
Table 10: VA FileMan Prompts—Getting online help at any prompts using question marks.....	61
Table 11: VA FileMan Prompts—"Replace" prompt shortcuts.....	64
Table 12: Field Types—Abbreviations for dates .....	75
Table 13: Field Types—Abbreviations for times .....	76
Table 14: ScreenMan—Keystrokes to navigate between fields in a ScreenMan form.....	99
Table 15: ScreenMan—Keystrokes to navigate between pages in a ScreenMan form .....	100
Table 16: ScreenMan—Command line options and shortcut keystrokes in a ScreenMan form .....	101
Table 17: ScreenMan—Keystrokes to move the cursor in a ScreenMan form.....	102
Table 18: ScreenMan—Keystrokes to delete characters in a ScreenMan form.....	103
Table 19: ScreenMan—Keystrokes to switch modes in a ScreenMan form.....	103
Table 20: ScreenMan—Keystrokes to navigate repeating blocks in a ScreenMan form.....	108
Table 21: Screen Editor—Keystrokes to navigate in the Screen Editor .....	116
Table 22: Screen Editor—Keystrokes to exit and/or save text in the Screen Editor .....	117
Table 23: Screen Editor—Keystrokes to find text in the Screen Editor .....	117
Table 24: Screen Editor—Keystrokes to format paragraphs in the Screen Editor.....	118
Table 25: Screen Editor—Keystrokes to cut and paste text in the Screen Editor .....	119
Table 26: Screen Editor—Keystrokes to delete text in the Screen Editor .....	120
Table 27: Screen Editor—Keystrokes to change the settings and mode in the Screen Editor.....	121
Table 28: Line Editor—"Replace" prompt shortcuts .....	129

## Figures and Tables



# Orientation

## *What is VA FileMan?*

VA FileMan is the database management system for the Veterans Health Information Systems and Technology Architecture user (VistA) environment. VA FileMan creates and maintains a database management system that includes features such as:

- A report writer
- A data dictionary manager
- Scrolling and screen-oriented data entry
- Text editors
- Programming utilities
- Tools for sending data to other systems
- File archiving

VA FileMan can be used as a standalone database, as a set of interactive or "silent" routines, or as a set of application utilities; in all modes, it is used to define, enter, and retrieve information from a set of computer-stored files, each of which is described by a data dictionary.

VA FileMan is a public domain software package that is developed and maintained by the Department of Veterans Affairs. It is widely used by VA medical centers and in clinical, administrative, and business settings in this country and abroad.



**CAUTION: Programmer access in VistA is defined as DUZ(0)="@". It grants the privilege to become a programmer in VistA. Programmer access allows you to work outside many of the security controls enforced by VA FileMan, enables access to all VA FileMan files, access to modify data dictionaries, etc. It is important to proceed with caution when having access to the system in this way.**

## ***How to Use this Manual***

The *VA FileMan User Manual* is designed to provide you, the VistA user, with "how to" information on the functions of VA FileMan, VistA's database management system. The features of VA FileMan are used throughout most VistA applications.

This manual shows how to use the features of VA FileMan that are likely to be used by *all* VistA users. It introduces basic VA FileMan concepts, and shows you how to use VA FileMan's basic tools for displaying and editing data.

The *VA FileMan User Manual* is comprised of two separate documents:

- The *VA FileMan User Manual* (this manual) shows how to use VA FileMan features that are likely to be used by *all* VistA users.



**NOTE:** This document is available in Microsoft Word (.doc), Adobe Acrobat Portable Document Format (PDF), and Hypertext Markup Language (HTML) format (see the "[HTML Manuals](#)" section).

- The *VA FileMan Advanced User Manual* describes features that are more likely to be used by Automated Data Processing Application Coordinators (ADPACs), Information Resource Management (IRM) staff, and other technical users.



**NOTE:** This document is available in Microsoft Word (.doc), Adobe Acrobat Portable Document Format (PDF), and Hypertext Markup Language (HTML) format (see the "HTML Manuals" section).

The following major features of VA FileMan are introduced along with a description on how to use them:

- Advanced editing techniques.
- Importing and exporting data.
- Computed expressions and VA FileMan functions.
- Defining files and fields.
- Data security.
- Archiving data.
- System Management for VA FileMan.



**REF:** For VA FileMan installation instructions in the VistA environment, see the *VA FileMan Installation Guide* and any national patch description of the patch being released.

## HTML Manuals

Why produce an HTML (Hypertext Markup Language) edition of the VA FileMan User Manual?

- The HTML versions of the VA FileMan manuals are useful as online documentation support as you use VA FileMan. HTML manuals allow you to instantly jump (link) to specific sections or references online.
- The VA FileMan HTML manuals are "living" documents that are continuously updated with the most current VA FileMan information (unlike paper or printed documentation). They are updated based on new versions, patches, or enhancements to VA FileMan.
- Presenting manuals in an HTML format on a Web server also gives new opportunities, such as accessing embedded multimedia training material (e.g., movies) directly in the manuals themselves.
- Manuals are accessible over the VA Intranet network.

## *Intended Audience*

The intended audience of this manual is all key stakeholders. The stakeholders include the following:

- Automated Data Processing Application Coordinators (ADPACs)
- Information Resource Management (IRM)—System administrators at Department of Veterans Affairs (VA) sites who are responsible for computer management and system security on the VistA M Servers.
- Office of Information and Technology (OIT)—VistA legacy development teams.
- Product Support (PS).

## *Legal Requirements*

There are no special legal requirements involved in the use of VA FileMan.

## Disclaimers

This manual provides an overall explanation of VA FileMan and the functionality contained in VA FileMan 22.0; however, no attempt is made to explain how the overall VistA programming system is integrated and maintained. Such methods and procedures are documented elsewhere. We suggest you look at the various VA Internet and Intranet Websites for a general orientation to VistA. For example, visit the Office of Information and Technology (OIT) VistA Development Intranet Website: <http://vista.med.va.gov>






**DISCLAIMER:** The appearance of external hyperlink references in this manual does *not* constitute endorsement by the Department of Veterans Affairs (VA) of this Website or the information, products, or services contained therein. The VA does *not* exercise any editorial control over the information you may find at these locations. Such links are provided and are consistent with the stated purpose of the VA.

## Documentation Conventions

This manual uses several methods to highlight different aspects of the material:

- Various symbols are used throughout the documentation to alert the reader to special information. The following table gives a description of each of these symbols:

**Table ii. Documentation symbol descriptions**

Symbol	Description
	<b>NOTE/REF:</b> Used to inform the reader of general information including references to additional reading material.
	<b>CAUTION/RECOMMENDATION/DISCLAIMER:</b> Used to caution the reader to take special notice of critical information.
	<b>TIP:</b> Used to inform the reader of helpful tips or tricks they can use when working with VA FileMan.

- Descriptive text is presented in a proportional font (as represented by this font).
- Conventions for displaying TEST data in this document are as follows:
  - The first three digits (prefix) of any Social Security Numbers (SSN) will begin with either "000" or "666".
  - Patient and user names will be formatted as follows: [Application Name]PATIENT,[N] and [Application Name]USER,[N] respectively, where "Application Name" is defined in the Approved Application Abbreviations document and "N" represents the first name as a

number spelled out and incremented with each new entry. For example, in VA FileMan (FM) test patient and user names would be documented as follows: FMPATIENT,ONE; FMPATIENT,TWO; FMPATIENT,THREE; etc.

- Sample HL7 messages, "snapshots" of computer online displays (i.e., roll-and-scroll screen or character-based screen captures/dialogues) and computer source code, if any, are shown in a *non-proportional* font and enclosed within a box.
- User's responses to online prompts will be **bold** typeface and highlighted in yellow (e.g., **<Enter>**).
- Emphasis within a dialogue box will be **bold** typeface and highlighted in blue (e.g., **STANDARD LISTENER: RUNNING**).
- Some software code reserved/key words will be **bold** typeface with alternate color font.
- References to "**<Enter>**" within these snapshots indicate that the user should press the **<Enter>** key on the keyboard. Other special keys are represented within **< >** angle brackets. For example, pressing the **PF1** key can be represented as pressing **<PF1>**.
- Author's comments are displayed in italics or as "callout" boxes.



**NOTE:** Callout boxes refer to labels or descriptions usually enclosed within a box, which point to specific areas of a displayed image.

- All uppercase is reserved for the representation of M code, variable names, or the formal name of options, field/file names, and security keys (e.g., DIEXTRACT).



**NOTE:** Other software code (e.g., Delphi/Pascal and Java) variable names and file/folder names can be written in lower or mixed case.

## ***Documentation Navigation***

This document uses Microsoft® Word's built-in navigation for internal hyperlinks. To add **Back** and **Forward** navigation buttons to your toolbar, do the following:

1. Right-click anywhere on the customizable Toolbar in Word 2007 or higher (not the Ribbon section).
2. Select **Customize Quick Access Toolbar** from the secondary menu.
3. Press the drop-down arrow in the "Choose commands from:" box.
4. Select **All Commands** from the displayed list.
5. Scroll through the command list in the left column until you see the **Back** command (green circle with arrow pointing left).
6. Click/Highlight the **Back** command and press **Add** to add it to your customized toolbar.
7. Scroll through the command list in the left column until you see the **Forward** command (green circle with arrow pointing right).
8. Click/Highlight the Forward command and press **Add** to add it to your customized toolbar.
9. Press **OK**.

You can now use these **Back** and **Forward** command buttons in your Toolbar to navigate back and forth in your Word document when clicking on hyperlinks within the document.



**NOTE:** This is a one-time setup and will automatically be available in any other Word document once you install it on the Toolbar.

## ***How to Obtain Technical Information Online***

Exported VistA M Server-based software file, routine, and global documentation can be generated through the use of Kernel, MailMan, and VA FileMan utilities.



**NOTE:** Methods of obtaining specific technical information online will be indicated where applicable under the appropriate section.



**REF:** See the *VA FileMan Technical Manual* for further information.

## Help at Prompts

VistA M Server-based software provides online help and commonly used system default prompts. Users are encouraged to enter question marks at any response prompt. At the end of the help display, you are immediately returned to the point from which you started. This is an easy way to learn about any aspect of the software.

## Obtaining Data Dictionary Listings

Technical information about VistA M Server-based files and the fields in files is stored in data dictionaries (DD). You can use the List File Attributes option [DILIST] on the Data Dictionary Utilities menu [DI DDU] in VA FileMan to print formatted data dictionaries.



**REF:** For details about obtaining data dictionaries and about the formats available, see the "List File Attributes" chapter in the "File Management" section in the *VA FileMan Advanced User Manual*.

## *Assumptions about the Reader*

This manual is written with the assumption that the reader is familiar with the following:

- VistA computing environment:
  - Kernel—VistA M Server software
  - VA FileMan data structures and terminology—VistA M Server software
- Microsoft Windows environment
- M programming language

## *Reference Materials*

Readers who wish to learn more about VA FileMan should consult the following documents:

- *VA FileMan Release Notes* (PDF format)
- *VA FileMan Installation Guide* (PDF format)
- *VA FileMan Technical Manual* (PDF format)
- *VA FileMan User Manual* (this manual; PDF and HTML format)
- *VA FileMan Advanced User Manual* (PDF and HTML format)
- *VA FileMan Programmer Manual* (PDF and HTML format)



**REF:** VA FileMan documentation in HTML format is located on the VA FileMan Intranet Product website: <http://vaww.vista.med.va.gov/fileman/index.asp>

Using a Web browser, open the **HTML** documents "table of contents" page (i.e., [index.html](#)). The *VA FileMan User Manual*, the *VA FileMan Advanced User Manual*, and the *VA FileMan Programmer Manual* are all linked together.

VistA documentation is made available online in Microsoft Word format and in Adobe Acrobat Portable Document Format (PDF). The PDF documents *must* be read using the Adobe Acrobat Reader, which is freely distributed by Adobe Systems Incorporated at: <http://www.adobe.com/>

VistA software documentation can be downloaded from the VA Software Document Library (VDL) at: <http://www.va.gov/vdl/>



**REF:** VA FileMan manuals are located on the VDL at: <http://www.va.gov/vdl/application.asp?appid=5>

VistA documentation and software can also be downloaded from the Product Support (PS) anonymous directories:

- Preferred Method      [download.vista.med.va.gov](http://download.vista.med.va.gov)

This method transmits the files from the first available FTP server.

- Albany OIFO    [ftp.fo-albany.med.va.gov](ftp://ftp.fo-albany.med.va.gov)
- Hines OIFO     [ftp.fo-hines.med.va.gov](ftp://ftp.fo-hines.med.va.gov)
- Salt Lake City OIFO    [ftp.fo-slc.med.va.gov](ftp://ftp.fo-slc.med.va.gov)







# 1 Introduction


## 1.1 Fields, Records, and Files

A computer database such as VA FileMan organizes your data, storing it in fields, records, and files, much as you might arrange and preserve information on paper.

A *record* is a group of fields of data. Each record has a name (e.g., a patient name for a patient record). You can use the record name to recall the record for editing or for printing out. Records are also known as *file entries*.

For example, a record for a patient might have various fields such as NAME, AGE, ADMISSION DATE, etc. for a single patient. Each record for a patient would contain the same set of fields (places to fill in information):

Figure 1: Example showing several patient records

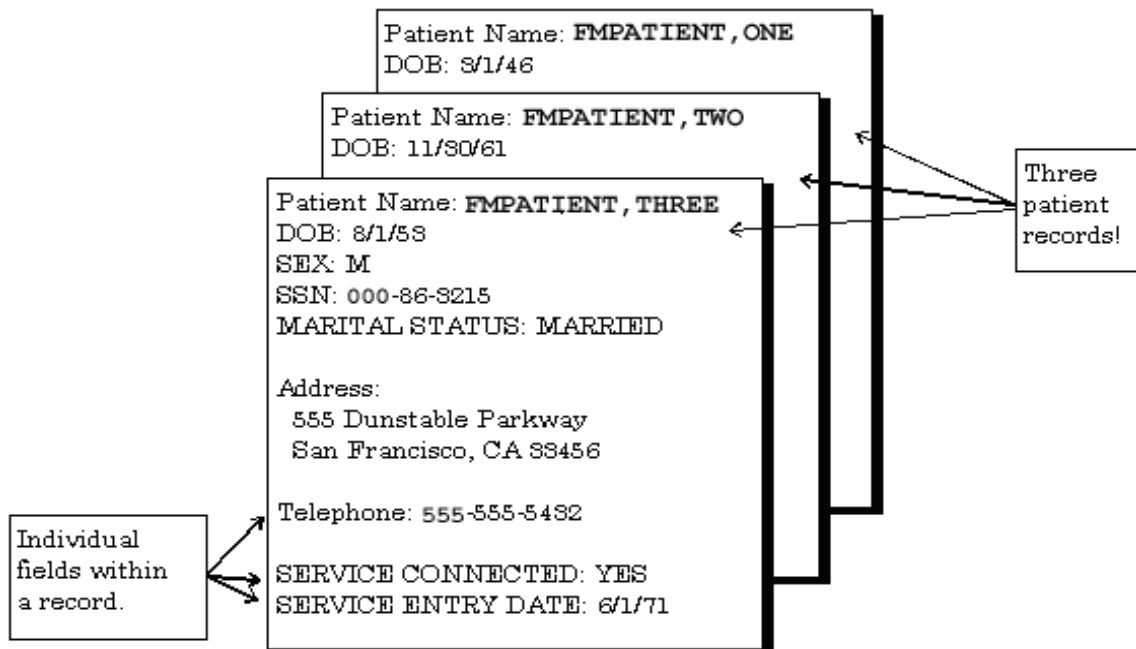

Each *field* in a record functions just like a blank on a form. When you're editing a record on a terminal, for each field, you'll find a prompt that tells you what type of data to enter.


VA FileMan uses nine basic field types. These fields allow you to enter only certain kinds of information, just as a blank on a form might require you to enter only numbers. For example, a DATE OF BIRTH field could be set up to record dates/times; a SOCIAL SECURITY NUMBER field could be set up to record a nine-digit number; an ADDRESS field could be set up to hold the text of an address. These three fields are different from one another because of the type of data they store.

All of the records that contain like data are collected and stored in the same *file*. For example, all patient records are stored in the PATIENT file (#2) and all computer user records are stored in the NEW PERSON file (#200). This way, to look up a patient, you know that the file to go to is the PATIENT file. Also, to do a report on all patients, you would generate the report from the PATIENT file.

## 1.2 Files and the Database

The *database* contains all the data files on your computer system:

Figure 2: Representation of a database

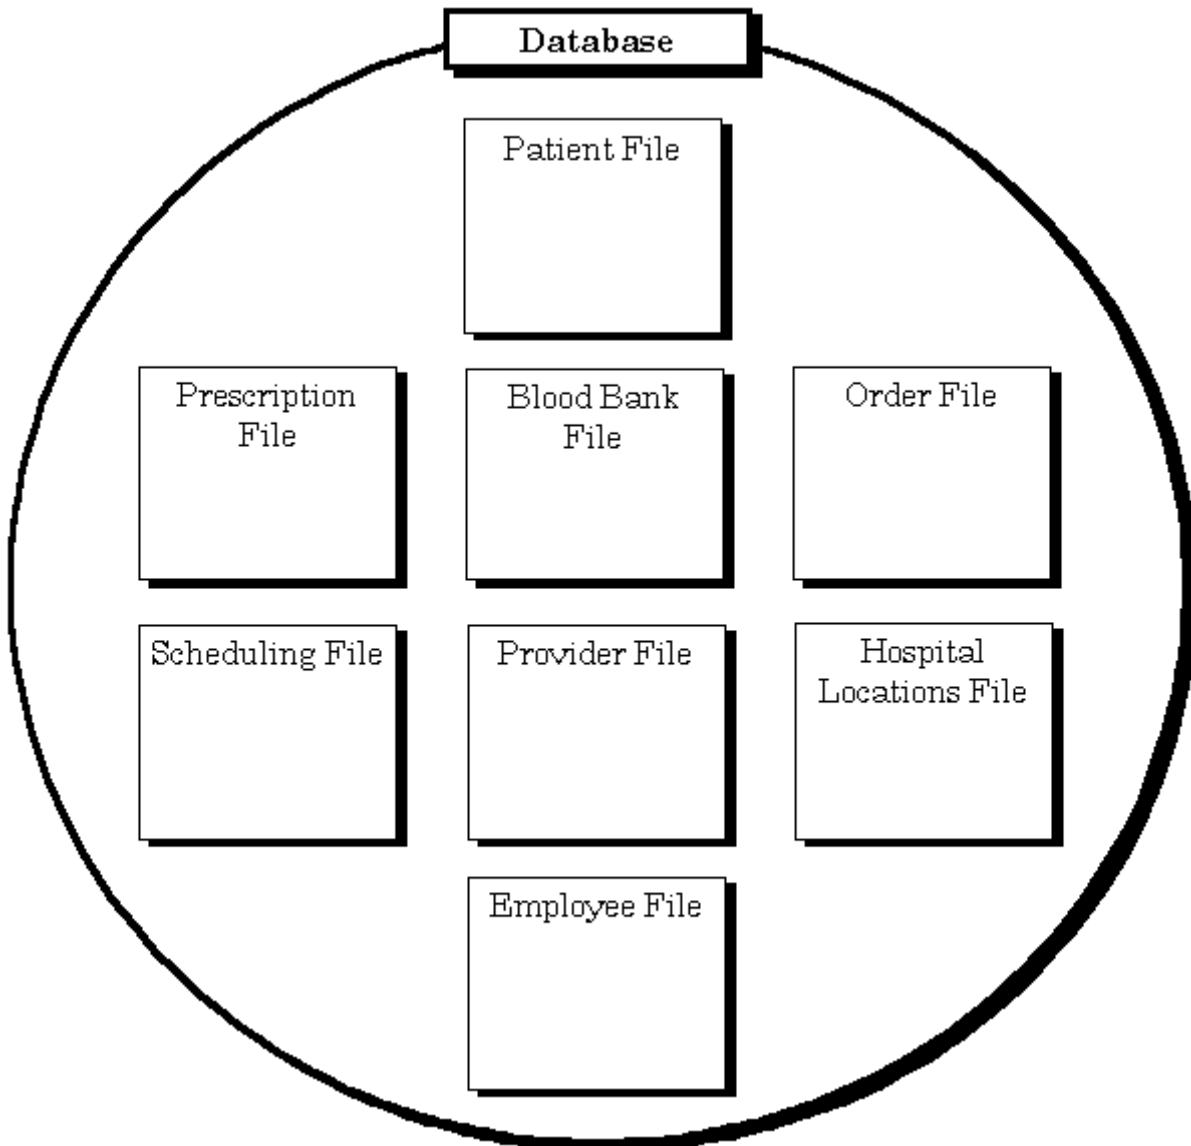



**NOTE:** There are many more files than this in VistA databases!

### 1.3 Printing Records from Files

One way of getting at the information stored in a database is to generate reports that print out selected records. You don't have to print *every* field in a record; you can just choose a subset of fields to print out. Nor do you have to print *every* record in a file; there are ways to limit and select what records to print out.

The following report displays four records, with one line of output per record, from the HOSPITAL LOCATION file (#44):

**Figure 3: Example of a printed report**

Internal Entry		
Number	Name	Title
-----	-----	-----
1	ICU	Intensive Care Unit
2	CCU	Critical Care Unit
5	OR	Operating Room
25	1EAST	Ward on 1 East

Most applications that use VA FileMan provide a number of already-set-up reports you can quickly choose and print out. In addition, there are options in VA FileMan that allow you to generate your own reports.

This manual contains the following chapters on print records from the database:

- Chapter [3—Inquire](#)
- Chapter [4—Print](#)
- Chapter [5—Search](#)
- Chapter [6—Browser](#)

### 1.4 Adding and Editing Records

As well as printing records from the database, you can *add* new records and *edit* existing records. When you work on the computer system with VistA applications (e.g., Laboratory) most of what you are doing is adding new records and editing existing ones. For example, each new lab result would get stored in a new record; when you make a status change it would be an edit to a field or fields in a patient's existing record.

Since the bulk of the work you do on the computer system involves working with records, the more you know about using the underlying database system (VA FileMan), the easier it will be to do all of your work on the computer system.

This manual contains the following chapters on how to edit information in records:

- Chapter [8—VA FileMan Prompts](#)
- Chapter [9—Field Type](#)
- Chapter [10—Adding and Deleting Records](#)
- Chapter [11—ScreenMan](#) (editing via forms)
- Chapter [13—Choice of Word-processing Editors](#)
- Chapter [14—Screen Editor](#) (WORD-PROCESSING fields)
- Chapter [15—Line Editor](#) (WORD-PROCESSING fields)

## **1.5 LAYGO File Access**

In VistA applications, you not only display and edit existing records, but also add and delete records from files. For example, you might need to add a new patient to the PATIENT file. The access to add and delete records can be controlled, however; each VA FileMan file can be set to either allow or not allow adding and deleting of new records.

If a file allows records to be added or deleted, it is said to have *LAYGO* (Learn-As-You-Go) access. To add or delete records, your user account must also be set to allow LAYGO access to the file in question. For example, there are certain conditions when you need to specify a particular physician. At that point, you can enter a new physician name, rather than choosing one that already is on file. If you are allowed to add new entries to the file (i.e., you have LAYGO access), the new entry is added to a file of physicians.

## **1.6 Scrolling Mode vs. Screen Mode**

Many VA VistA application packages have a *Scrolling Mode* interface. Scrolling Mode works as follows:

1. The computer puts a prompt on your screen.
2. You enter a response to the prompt.
3. The computer places another prompt on the screen, scrolling down one line. Previous prompts move up and eventually off of your screen.

In Scrolling Mode, prompting occurs in the same predetermined order, in a sequence designed by the developer of the application. You enter, and the computer stores, your responses one at a time. Unless you're familiar with a few timesaving Scrolling Mode techniques, you have to step through each prompt in a record before you can finish editing the record.



**REF:** For more information on editing records in Scrolling Mode, see Chapter 8, "[VA FileMan Prompts](#)."

Recently developed VistA applications, on the other hand, often use a *Screen Mode* interface for editing data. In the Screen Mode approach, each field occupies a fixed position on the screen. You can see many data fields at once, and use simple key combinations to edit data and move from field to field on a screen. You can also move from one screen to another like turning through the pages of a book. VA FileMan's screen-oriented data entry tool is called ScreenMan.

In comparing Scrolling Mode with Screen Mode, an area in particular where Screen Mode is much more convenient than Scrolling Mode is text editing. VA FileMan's Scrolling Mode text editor is the Line Editor. A better choice for editing text is VA FileMan's Screen Mode editor, the Screen Editor.



**REF:** For more information on the Line Editor, see Chapter 15, "[Line Editor](#)."

For more information on the Screen Editor, see Chapter 14, the "[Screen Editor](#)."

## 2 Displaying Information





## 3 Inquire

Many reports that you print from applications are pre-designed; that is, the selection of records, and the fields that print for each record are pre-determined by the designer of the application. You simply choose the report you would like to print from a menu option, choose an output device, and the selected report prints.

You can also create your own reports, however, if you have either VA FileMan's print options, or custom-designed application options that take advantage of the same VA FileMan features. This chapter introduces one of VA FileMan's print options, Inquire to File Entries.

There are two ways you'll have an opportunity to use VA FileMan's inquiry capabilities:

- An option that has been set up already to allow you to inquire to entries from a particular file.
- VA FileMan's Inquire to File Entries option, which lets you inquire to any file to which you have access.

In either case, use of VA FileMan's inquire feature is very similar. In most cases, the only difference is that with the Inquire to File Entries option, you have to choose which file to inquire to.

### 3.1 Inquire to File Entries Option

The quickest way to display the data for one file entry or for a small number of entries is to use the Inquire to File Entries option. This option lets you choose a set of entries to display, and choose the fields that you want to see for each entry. For example:

**Figure 4. Inquire—Dialogue using the Inquire to File Entries option: Sample user entries at prompts and sample report**

```

Select VA FileMan Option: INQ <Enter>   uire to File Entries

OUTPUT FROM WHAT FILE: PATIENT// <Enter>

Select PATIENT NAME: FMPATIENT, ONE
ANOTHER ONE: FMPATIENT, TWO
ANOTHER ONE: FMPATIENT, THREE
ANOTHER ONE: <Enter>

STANDARD CAPTIONED OUTPUT? Yes// <Enter> (Yes)
Include COMPUTED fields: (N/Y/R/B): NO// ?

Enter a code from the list.
Select one of the following:

      N      NO - No record number (IEN), no Computed Fields
      Y      Computed Fields
      R      Record Number (IEN)
      B      BOTH Computed Fields and Record Number (IEN)

Include COMPUTED fields: (N/Y/R/B): NO// <Enter>   OTH Computed Fields and Record
Number (IEN)
DISPLAY AUDIT TRAIL? No// <Enter>   NO

NUMBER: 180          NAME: FMPATIENT, ONE
SEX: MALE           DATE OF BIRTH: 04/04/1944
.
.
.
NUMBER: 229          NAME: FMPATIENT, TWO
SEX: MALE           DATE OF BIRTH: 01/01/1962
.
.
.
NUMBER: 229          NAME: FMPATIENT, THREE
SEX: FEMALE        DATE OF BIRTH: 01/25/1952
.
.
.
    
```

**1. Choose file.**

**2. Choose entries to display from file.**

**3. Choose output fields. Captioned Output is the easiest (displays all fields that contain data for each entry).**

**4. For Captioned Output, choose whether to display record numbers and computed fields.**

**5. The selected entries are displayed (abbreviated).**

### 3.1.1 Standard Caption Output

Choosing Standard Captioned Output can be very useful; it prints out *all* fields (that contain data) for each entry in your report. Use it is a quick way to select all the fields for each entry in your report. Otherwise you need to select each field to print individually, from the list of fields available to print in the file. Answering YES to use STANDARD CAPTIONED OUTPUT is the fastest way to choose what fields to print.

### 3.1.2 Computed Fields

When using Standard Captioned Output, you can choose from the following at the "Include COMPUTED Fields:" prompt:

- **N (default)**—NO - No record number (IEN), no Computed Fields
- **Y**—Computed Fields
- **R**—Record Number (IEN)
- **B**—BOTH Computed Fields and Record Number (IEN)

The default is to display neither. Enter two question marks for detailed help about responding to this prompt.


### 3.1.3 Audit Trails

If one or more of the fields have been audited, the system will display the "DISPLAY AUDIT TRAIL?" prompt. If you answer YES, then you will see the changes that have been recorded for the various fields in the AUDIT file (#1.1), along with the current values of the fields.

## 3.2 SORT Templates

When you choose several entries to display, you will be prompted:

**Figure 5: Inquire—Prompt to store entries into a template**



```
STORE THESE ENTRY ID'S IN A TEMPLATE:
```

You can *save* your list of selected entries in a SORT template by entering a template name at this prompt. Your list of entries is then saved in a SORT template. You can then *reuse* the list of selected entries in the template when you do additional printing from this file in the future.



**REF:** For more information on using SORT templates, see the "Saving Sort Criteria (SORT Templates)" section in Chapter 4, "[Print](#)."

### 3.3 Choose Your Own Print Fields



**CAUTION:** Do not use STANDARD CAPTIONED OUTPUT.

To choose your own fields to output for each entry, answer NO to the "STANDARD CAPTIONED OUTPUT?" prompt. You can then choose your own output fields. For example, if you only need NAME, DATE OF BIRTH, and PROVIDER information about a selected patient, you could request it, as shown in the following example:

**Figure 6: Inquire—Dialogue to choosing your own print fields: Sample user entries at prompts**

```

Select VA FileMan Option: INQ <Enter> uire to File Entries

OUTPUT FROM WHAT FILE: PATIENT// <Enter>
Select PATIENT NAME: FMPATIENT, ONE
ANOTHER ONE: <Enter>
STANDARD CAPTIONED OUTPUT? Yes// NO <Enter> (No)
FIRST PRINT FIELD: NAME
    1  NAME
    2  NAME COMPONENTS
    3  NAME ORDER
CHOOSE 1-3: 1 <Enter> NAME
THEN PRINT FIELD: DATE OF BIRTH
THEN PRINT FIELD: PROVIDER
THEN PRINT FIELD: <Enter>
Heading (S/C): PATIENT LIST// <Enter>
DEVICE: <Enter>  SSH VIRTUAL TERMINAL  Right Margin: 80// <Enter>

PATIENT LIST                                FEB 12,2013  18:41  PAGE 1
NAME                                         DATE OF BIRTH
PROVIDER
-----
FMPATIENT,ONE                               11/20/1950
    
```

1. Answer NO here.

2. Choose output fields.

3. Choose an output device.



**REF:** For more information on customizing output print fields, see Chapter 4, "[Print](#)."

It provides detailed information about the different choices you can make at the "PRINT FIELD:" prompt to display your information in different ways.

### 3.4 Choose Your Own Device



**CAUTION:** Do *not* use STANDARD CAPTIONED OUTPUT.

If you enter YES at the "STANDARD CAPTIONED OUTPUT?" prompt, output is sent to the HOME device, which ordinarily is the terminal you are using. To send output to a printer, you need to answer NO at the "STANDARD CAPTIONED OUTPUT?" prompt. This means you must choose your own print fields, as described above. Doing this allows you to select the output device, however.

If you answer NO to the "STANDARD CAPTIONED OUTPUT?" prompt, you can *still* get CAPTIONED output, however. To do this, choose the CAPTIONED PRINT template at the first "PRINT FIELD:" prompt, as shown below.

Enter a left bracket, "[", and the word CAPTIONED. CAPTIONED OUTPUT from the template works exactly as if you had answered YES at the "STANDARD CAPTIONED OUTPUT?" to request CAPTIONED OUTPUT.

**Figure 7: Inquire—Dialogue choosing a device *and* getting STANDARD CAPTIONED OUTPUT:  
Sample user entries at prompts**

```

STANDARD CAPTIONED OUTPUT? Yes// N <Enter> (No)
FIRST PRINT FIELD: [CAPTIONED

Include COMPUTED fields: (N/Y/R/B): NO// <Enter> - No record number (IEN), no
Computed Fields
DISPLAY AUDIT TRAIL? No// <Enter> NO
Heading (S/C): PATIENT LIST// <Enter>

DEVICE:
    
```

**Even though you do not choose "Standard Caption Output," you can still use the CAPTIONED Print Template for the same effect.**

**By not choosing "Standard Caption Output," you can choose the output device.**



## 4 Print

### 4.1 *How to Print Reports from Files*

With the Inquire to File Entries option, you can select entries from a file, one by one, choose a format for displaying the selected entries, and then output the selected entries.

VA FileMan's print capabilities, on the other hand, allow you to select entries, not one by one, but instead by choosing a range of entries based on the sorting order. You can choose all entries in a file, for example, and sort them in alphabetical order for the printout. Alternatively, you can choose all entries sorting between "E" and "F" and sort them in alphabetical order for the printout.

### 4.2 *VA FileMan's Print Capabilities*

There are two ways in which you'll have an opportunity to use VA FileMan's print capabilities:

- An option that has been set up already to allow you to print from a particular file.
- VA FileMan's Print File Entries option, which lets you print from any file to which you have access.

In either case, use of VA FileMan's print features is very similar. In most cases, the only difference is that with the Print File Entries option, you have to choose from which file to print.

Unlike the Inquire to File Entries option, which displays individual records, VA FileMan's print can list all records in a file. Thus, the focus of the Inquire to File Entries option is a single or small group of entries while VA FileMan's prints are concerned with the entire file.

VA FileMan's print features allow considerable flexibility in selecting entries, ordering (or sorting) the entries selected, choosing which fields to display, and formatting the output.

The following two basic components can be used to create a report:

1. "SORT BY:" dialogue. Used to sort (and sometimes narrow down) the entries that you want displayed.
2. "PRINT FIELD:" dialogue. Used to choose the fields you want and the format of their display.

The choices you can make at these two prompts are discussed in detail later in this chapter.



### 4.3 Standard Column Format for VA FileMan Prints

VA FileMan has a standard, columnar format for print output. The file name, current date/time, and page number appear at the top of each report page, followed by column headings that correspond to the labels of selected fields. There are many ways to customize the format, as shown below:

**Figure 8: Print—An Example of a Standard Printout**

PATIENT LIST	NOV 28, 1996	11:32	PAGE 1
NAME	SEX		
-----			
FMPATIENT, SEVEN	MALE		
FMPATIENT, EIGHT	MALE		
FMPATIENT, NINE	MALE		
FMPATIENT, 10	FEMALE		

This simple example of a report (as seen in [Figure 8](#)) is generated by the dialogue that follows. It prints information from all the entries in the PATIENT file, ordered by NAME (the .01 field in the file). Only data from the NAME and SEX fields are printed, as requested at the "PRINT FIELD:" prompts:

**Figure 9: Print—Dialogue encountered when creating a printed report: Sample user entries at prompts**

```
Select VA FileMan Option: PRINT <Enter> File Entries
OUTPUT FROM WHAT FILE: PATIENT// <Enter>
SORT BY: NAME// <Enter>
START WITH NAME: FIRST// <Enter>
FIRST PRINT FIELD: NAME
    1 NAME
    2 NAME COMPONENTS
    3 NAME ORDER
CHOOSE 1-3: 1 <Enter> NAME
THEN PRINT FIELD: SEX
THEN PRINT FIELD:
Heading (S/C): PATIENT LIST// <Enter>
DEVICE:
```

**Sort output by record name.**

**Choose print fields.**



**NOTE:** You would have received information about every patient in the file, not just these four. You could have asked for several more fields to be printed. They would appear as columns of output, left to right, in the order specified.

## 4.4 Sorting

### 4.4.1 Specifying SORT BY Fields

Sorting determines the *order* that records are printed in your reports. You can accept the default order (by the .01 field), or you can specify your own sorting order. The sort can be a simple sort, based on only one field, or you can sort based on the values of several fields.

For example, if you want to print the entries in order from oldest to youngest patient, you could sort the report by date of birth (the DATE OF BIRTH field in the PATIENT file):

**Figure 10: Print—Dialogue specifying a sort order for a printed report: Sample user entries at prompts**

```

Select VA FileMan Option: PRINT <Enter> File Entries

OUTPUT FROM WHAT FILE: PATIENT// <Enter>
SORT BY: NAME// DATE OF BIRTH
START WITH DATE OF BIRTH: FIRST// <Enter>
  WITHIN DATE OF BIRTH, SORT BY: <Enter>
FIRST PRINT FIELD: NAME
  1 NAME
  2 NAME COMPONENTS
  3 NAME ORDER
CHOOSE 1-3: 1 <Enter> NAME
THEN PRINT FIELD: SEX
THEN PRINT FIELD: <Enter>
Heading (S/C): PATIENT LIST// <Enter>
DEVICE: <Enter> SSH VIRTUAL TERMINAL Right Margin: 80// <Enter>
  
```

The output then prints in the following order (by DATE OF BIRTH):

**Figure 11: Print—Example of a printed report in a specific order**

```

PATIENT LIST                                FEB 12, 2013  19:11  PAGE 1
NAME                                         SEX
-----
      DATE OF BIRTH: OCT 14, 1877
FMPATIENT,12                               FEMALE
      DATE OF BIRTH: NOV 3, 1922
FMPATIENT,13                               MALE
      DATE OF BIRTH: APR 4, 1933
FMPATIENT,NINE                             MALE
  
```

In the previous example, the sort criterion (DATE OF BIRTH) is printed with every change in sort value. VA FileMan does this when a sort field is not specified as a print field.

To suppress the printing of sort values (subheaders) in the body of your report, you can either:

- Add the field you are sorting by to the print field list.
- Place an at-sign (@) in front of the field label at the "SORT BY:" prompt. In the previous example, you would sort by @DATE OF BIRTH instead of DATE OF BIRTH.

## 4.4.2 Sorting Order

The ordering of entries within a sort is generally from low value to high value. Some special cases for some DATA Type field values include:

- SET OF CODES fields are sorted by the internally stored code, *not* the value that is output.
- FREE TEXT fields usually sort from lowest value to highest value following the ASCII sorting sequence: Digits sort before uppercase letters, which sort before lowercase letters (e.g., **M1** sorts before **MC** which sorts before **Mc**).

### 4.4.2.1 Sorting Canonic Numbers and Non-Canonic Strings, and the ;TXT Sort Qualifier

Canonic numbers are pure numbers that do not have leading zeros, or trailing zeros after a decimal point. Thus, **1.1** is a canonic number but **01.1** and **1.10** are not. A non-canonic string is everything else. For example, "**8C**" is a non-canonic string.

This distinction is important when sorting, because in all VA FileMan sorting, canonic numbers sort first, and everything else sorts second. Usually this works very well. But in a few cases where sort fields contain a mix of canonic numbers and non-canonic strings, unexpected sort orders result. Classic cases include sorting on Social Security Numbers and on ward locations.

Consider Social Security Numbers (SSNs). The SSNs **666333333** and **666999900** are canonic numbers. But the SSN **000769000** is *not* a canonic number, because of its leading zero. When you use the default sort based on Social Security Number, you get output that looks like the following:

**Figure 12: Print—Sorting canonic and non-canonic numbers**

PATIENT LIST		JUL 19,1996	11:36	PAGE 1
SSN	NAME			
-----				
666333333	FMPATIENT,13			
666999900	FMPATIENT,14			
000769000	FMPATIENT,15			

A similar situation occurs when you sort on ward locations. Suppose you have wards **8**, **8C**, and **9**. **8** and **9** are canonic numbers, while **8C** is a non-canonic string. Thus, if you sort on ward location, your output comes out in this order: **8**, **9**, **8C**.

To avoid this problem, use the sort qualifier ";TXT" on your sort field. This forces all field values to be *non-canonic*, with the result that a group of strings like **8**, **8C**, and **9** sort in the expected order.



**REF:** For more information on the ";TXT" sort qualifier, see the list of Sort Qualifiers in [Table 1](#).

#### 4.4.2.2 Sorting to Select Entries for Printing

Besides using sorting to determine the *order* of entries printed, you can also use the "START WITH ...:" prompt to restrict what entries are printed to a range. For example, if you accept the default sort range (from first to last), you may get a report with every item in the file listed. You can cut this list down to a subset of the entries in the file by how you sort (e.g., entries that sort from **FMPATIENT,A** to **FMPATIENT,Z** only).

To specify a sort range, enter the range starting point at the "START WITH...:" prompt, and the range end point at the "GO TO...:" prompt. For example:

**Figure 13: Print—Specifying a sort range**

```
SORT BY: NAME// <Enter>
START WITH NAME: FIRST// FMPATIENT,A
GO TO NAME: LAST// FMPATIENT,Z
```

#### 4.4.2.3 Selecting All Entries with the Same Value for One Field

A simple kind of selecting can be done to choose only those entries that have a particular value for a field. For example, to list only those patients who have a DIAGNOSIS equal to CANCER, you can sort as in the example below:

**Figure 14: Print—Choosing entries with a specific value**

```
START WITH DIAGNOSIS: FIRST// CANCER
GO TO DIAGNOSIS: LAST// CANCER
```

#### 4.4.2.4 Other Ways of Selecting Entries

The "START WITH ... GO TO .." dialogue can be used to do sophisticated selecting from a file. Computed expressions can be entered at the prompts to filter the entries to be printed.



**REF:** These powerful techniques are discussed in the "Computed Expressions" chapter of the *VA FileMan Advanced User Manual*.

You can also use VA FileMan's search functions to select entries for printing.



**REF:** For more information on VA FileMan's search functions, see Chapter 5, "[Search](#)."

#### 4.4.2.5 Including Entries with Null Fields in Your Sort (Start With @)

When you sort a report on a particular field, if any record in the file has *no value* in that field, that record will be *skipped and not printed*, if you accept the default sort start value (FIRST). In other words, in a print from the PATIENT file, if you sort on the PROVIDER field, start sorting from the default of FIRST, and there are some patients with nothing in their PROVIDER field, those patients will be *left off of the report entirely*.

If you want to include records in your report, even if they have no value in the field you are sorting on, sort from "@" instead of accepting the default of FIRST. As in the example below, enter an at-sign (@) at the "START WITH:" prompt:

**Figure 15: Print—Dialogue to include records with null values: Sample user entries at prompts**

```
Select VA FileMan Option: PRINT <Enter> File Entries
OUTPUT FROM WHAT FILE: PATIENT// <Enter>
SORT BY: NAME// PROVIDER
START WITH PROVIDER: FIRST// @
GO TO PROVIDER: LAST// <Enter>
  WITHIN PROVIDER, SORT BY: <Enter>
FIRST PRINT FIELD: NAME
  1 NAME
  2 NAME COMPONENTS
  3 NAME ORDER
CHOOSE 1-3: 1 <Enter> NAME
THEN PRINT FIELD: DATE OF BIRTH
THEN PRINT FIELD: <Enter>
Heading (S/C): PATIENT LIST// <Enter>

START AT PAGE: 1// <Enter>

...SORRY, THIS MAY TAKE A FEW MOMENTS...
```

**Start with an at-sign ("@") instead of FIRST to force inclusion of all entries in the printout, even those whose value for this field is null.**

**Whenever you specify any sort criteria at the "SORT BY:" prompt, you are prompted for what page to start at.**

The output of this sort would then include all records, even those with no value in their PROVIDER fields:

**Figure 16: Print—Sample report displaying fields with null values**

PATIENT LIST		FEB 13, 2013 16:22	PAGE 1
NAME		DATE OF BIRTH	
PROVIDER: <b>EMPTY</b>	FMPATIENT, ONE	03/01/1940	<div style="border: 1px solid black; border-radius: 15px; padding: 5px; width: fit-content;"> <p><b>FMPATIENT, ONE does not have a provider. If the @ had not been entered at the "START WITH PROVIDER:" prompt.</b></p> </div>
PROVIDER: FM PROVIDER, 2	FMPATIENT, TWO	03/04/1933	
PROVIDER: FM PROVIDER, 2	FMPATIENT, THREE	09/25/1949	
PROVIDER: FM PROVIDER, 2	FMPATIENT, FOUR	01/31/1921	
PROVIDER: FM PROVIDER, 3	FMPATIENT, FIVE	05/24/1931	
PROVIDER: FM PROVIDER, 3	FMPATIENT, SIX	04/03/1935	
PROVIDER: FM PROVIDER, 3	FMPATIENT, SEVEN	10/22/1925	


#### 4.4.2.6 Sort Qualifier Reference

As well as entering fields to sort by, you can also enter formatting controls in the "SORT BY:" dialogue. Add these qualifiers to the field label or to the computed expression you're entering at the "SORT BY:" prompt.


##### 4.4.2.6.1 Sort Qualifiers to use at "SORT BY:" Prompts

[Table 1](#) lists the sort qualifiers you can use at the "SORT BY:" prompts:

**Table 1: Print—Sort Qualifiers**

Qualifier	Action	Discussion
!field	Number entries by sort value	Entries having the same value for the SORT BY field are numbered sequentially starting at one.
#field	Page break when sort value changes	Starts a new page every time the value of the sorted field changes.
*field	Specify a range for output without sorting	Lets you <i>select</i> entries based on this field in the "START WITH . . . GO TO . . ." dialogue, but <i>not sort</i> based on the field.
		 <b>NOTE:</b> Since sorting requires substantial system resources, do

Qualifier	Action	Discussion
		not sort entries unnecessarily.
+field	Subtotal within a SORT BY field	<p>When subtotalling, you indicate in the "PRINT FIELD" dialogue the fields to be enumerated. All requested numeric operations (sum, count, etc.) will be done as a subtotal when the SORT BY field changes in addition to the grand totals at the end.</p> <p>You can sub-subtotal by adding a prefix of + to two fields in the "SORT BY:" dialogue. For example:</p> <pre>SORT BY: +REGION WITHIN REGION, SORT BY: +STORE</pre> <p>This produces subtotals for each STORE within the subtotals for each REGION.</p>
-field	Reverse sort order	Only effective for NUMERIC and DATE/TIME valued fields. For DATE/TIME values, prints from most recent to earliest; for NUMERIC values, from largest to smallest.
@field	Suppress the printing of subheader	Normally, a subheader with the value of the SORT BY field name is printed for SORT BY fields, if the field is not also specified as a print field. Using an at-sign (@) suppresses those subheaders.
field;Cn	Set column of subheader	The number (n) indicates the column to begin the subheader.
field;Ln	Use less than the entire sort field for sorting	<p>The ;L suffix lets you specify that only the first "n" characters of the field be used to sort. Thus, if you specify:</p> <pre>SORT BY: NAME;L2</pre> <p>Only the first two letters of the name field will be used for sorting: the order of "Maris,Roger" and "Mantle,Mickey", for example, will be unpredictable in your output.</p>
field;Pa-b	Store sort range for display	<p>The ;P suffix saves the "START WITH" and "GO TO" sort range for <i>one</i> level of sort fields, for later reference at a "PRINT FIELD" prompt. You can substitute any string (up to 60 characters in length) for "a" and "b" in ";Pa-b". Whatever strings you use as "a" and "b" (e.g., FROM and TO) become subscripts of the PARAM() array:</p> <pre>SORT BY: NAME;PFROM-TO START WITH NAME: FIRST// C GO TO NAME: LAST// Dzzzzz</pre> <p>Then at a "PRINT FIELD" prompt, you can reference the saved values by using PARAM("a-string") and PARAM("b-string"). Thus, in this case:</p> <pre>THEN PRINT FIELD: PARAM("FROM") THEN PRINT FIELD: PARAM("TO")</pre> <p>The sort-from and sort-to values of "C" and "Dzzzzz" in the report would then print in the appropriate location. The typical reason to</p>

Qualifier	Action	Discussion
		<p>save sort values, and then retrieve them from the PARAM array in a print field, is for custom report headers (which are created as PRINT templates). It is one method to print sort criteria in the report header.</p> <p>If you need to sort on <i>two or more</i> fields, you need to use a different string for "a" and "b" at each level, or else the values will overwrite each other.</p> <p> <b>NOTE:</b> No value is saved in the PARAM array if the user accepts "FIRST" or "LAST" as the "START WITH" or "GO TO" sort values; the PARAM array will be null.</p>
field; <b>Sn</b>	Skip lines when sort value changes	<p>The ;<b>S</b> suffix skips one line between sort field values, if no number is added. If you specify a number (<b>n</b>), n-lines are skipped. You can use this qualifier to skip lines after subtotals are printed by inserting the following after the last subtotaled field:</p> <pre>WITHIN X, SORT BY: @"";S START WITH "" : FIRST// @ GO TO "" : LAST// @</pre>
field; <b>TXT</b>	Sort numbers as text	<p>The ;<b>TXT</b> sort qualifier forces digits to be sorted as alphanumeric strings, not as numbers (22 sorts before 3). Use this to correctly sort mixed canonic and non-canonic numbers.</p>
field;" <b>xxx</b> "	Replace caption in subheader and sort dialogue	<p>The default subheader is the field label or expression entered at the "SORT BY:" prompt. The same string is used within the sort dialogue. You can substitute a string of your choosing by adding a semicolon (;) and text enclosed in quotation marks. For example:</p> <pre>SORT BY: DATE OF BIRTH;"Birthdate: "</pre> <p>To suppress the caption in the subheader, enter two double quotes after the semicolon:</p> <pre>SORT BY: DATE OF BIRTH;" "</pre> <p>The specified caption is also used in the subsequent sort dialogue. This is useful in simplifying the sort dialogue when a field label is confusing, is concatenated, or is an extended pointer. For example:</p> <pre>SORT BY: STORE:REGION;"Location:" START WITH Location: FIRST// &lt;Enter&gt; WITHIN Location, SORT BY: &lt;Enter&gt; PRINT FIELD: STORE THEN PRINT FIELD:</pre> <p><b>"Location:"</b> is substituted for <b>"STORE:REGION"</b>.</p>



### 4.4.2.7 Saving Sort Criteria (SORT Templates)

You can save your sort criteria in a SORT template. This lets you reuse the same sorting instructions in future prints from the current file. PRINT templates are stored in the SORT TEMPLATE file (#.401). If you sort by more than three fields, you are asked whether you want to store your sort criteria in a SORT template:

**Figure 17: Print—Dialogue to create a Sort Template: Sample user entries at prompts**

```

Select VA FileMan Option: PRINT <Enter> File Entries

OUTPUT FROM WHAT FILE: PATIENT// <Enter>
SORT BY: NAME// ZIP CODE
START WITH ZIP CODE: FIRST// <Enter>
  WITHIN ZIP CODE, SORT BY: CITY
    1 CITY
    2 CITY (CIVIL)
    3 CITY (VA)
CHOOSE 1-3: 1 <Enter> CITY
  START WITH CITY: FIRST// <Enter>
  WITHIN CITY, SORT BY: NAME
    1 NAME
    2 NAME COMPONENTS
    3 NAME ORDER
CHOOSE 1-3: 1 <Enter> NAME
  START WITH NAME: FIRST// <Enter>
  WITHIN NAME, SORT BY: <Enter>
STORE IN 'SORT' TEMPLATE: ADDRESS LIST
Are you adding 'ADDRESS LIST' as a new SORT TEMPLATE? No// Y <Enter> (Yes)
DESCRIPTION:
No existing text
Edit? NO// YES

==[ WRAP ]==[ INSERT ]===== < DESCRIPTION >===== [ <PF1>H=Help ]====
Template for address listing.

<=====T=====T=====T=====T=====T=====T=====T=====T=====T=====T>=====

FIRST PRINT FIELD:
  
```

#### 4.4.2.7.1 Forcing Creation of a SORT Template

Ordinarily, you are only asked whether to save your sort criteria in a SORT template if you enter three or more fields at the "SORT BY:" prompts. However, to force this question to be asked, enter a right bracket (]) by itself at one "SORT BY:" prompt. No matter how few fields you sort by, you'll still be prompted to save your sort criteria in a SORT template.

**Figure 18: Print—Forcing the creation of a Sort template**

```

SORT BY: NAME// ]
SORT BY: NAME//
  
```

Print

#### 4.4.2.7.2 Reusing Sort Criteria in New Reports

The reason to save sort criteria in a SORT template is so that you can *reuse* your sort criteria in a new report from the same file.

To reuse a SORT template as the sort criteria in a new report, at the "SORT BY:" prompt in the new report, enter a left bracket ([) plus the template name:

**Figure 19: Print—Reusing a Sort template**

```
OUTPUT FROM WHAT FILE: NEW PERSON// <Enter>
SORT BY: NAME// [ADDRESS LIST <Enter>
                               (Dec 08, 1995@07:53) User #34 File #200
WANT TO EDIT 'ADDRESS LIST' TEMPLATE? NO// <Enter>
FIRST PRINT FIELD:
```

### 4.4.3 Choosing Print Fields

#### 4.4.3.1 Specifying Fields to Print

After you have specified the order in which the output should occur, you are asked to list the fields you want displayed for each file entry. In the simplest case, fields are identified by their label. If you enter a single question mark (?) at the prompt, a list of all the fields in the file is displayed. If you enter the name of a multiple, you are asked for the subfields you want printed. A subfield must be specified even if the multiple has only one subfield.

To print all fields in the file, enter **ALL** (uppercase) at the "FIRST PRINT FIELD:" prompt. You are then prompted:

**Figure 20: Print—Confirmation message to print all fields**

```
Do you mean ALL the fields in the file? NO//
```

Enter YES to indicate all fields. Otherwise, the file is searched for field labels beginning with the letters "ALL".



**NOTE:** Fields from other files can also be printed using extended pointers. This technique is described in the "Using Computed Expressions in COMPUTED Fields" section in the "Computed Expressions" chapter of the *VA FileMan Advanced User Manual*. You can also enter other computed expressions, which are also described in that chapter.

### 4.4.3.2 Print Qualifier Reference

VA FileMan's print capabilities provide many ways to format a report. If you don't specify any formatting controls, a format is constructed automatically. The width of each field's print area is computed using information from the field's definition. The default width is the larger of the maximum number of characters allowed for the field and the length of the longest word of the field's label (or other specification) in the print dialogue. Two inter-column spaces are added to separate fields.

However, by using print qualifiers at the "PRINT FIELD:" prompt, for each field, you can indicate how long the field's print area should be, where it should start, how many lines to skip before printing the field, and the column title for the field. You can also insert literal strings within the output.

For fields that have numeric values, you can call for several arithmetic calculations and indicate the number of decimal digits of accuracy. If you have requested subtotals in the sort dialogue (by preceding the field with a "+"), calculations are done at the subtotal level as well.


#### 4.4.3.2.1 Print Qualifiers to use at "PRINT FIELD:" Prompts

[Table 2](#) lists the print qualifiers you can use at the "PRINT FIELD:" prompts:

**Table 2: Print—Print Qualifiers**

Qualifier	Action	Discussion
!field	Count	The number of entries with non-null values in this field are counted.
#field	All statistics	Use with NUMERIC fields only. Six lines of statistical output are generated for the selected field: Total, count, mean, maximum, minimum, and standard deviation.
&field	Total	Use for NUMERIC fields only. The values of all occurrences of this field are summed.
+field	Total, count and mean	Use for NUMERIC fields only. The sum, count of non-null values, and the arithmetic mean of the non-null values are printed.
field;Cn	Set start column position	You can specify the starting column of a field's display. If the number ( <b>n</b> ) is a positive number, the field prints in that column counting from the left margin. If it is negative, the field starts in that column as subtracted from the right margin. If there is not enough room on a line for the field to display properly, it is moved to the line below. Adding ;C1 always starts a field's display at the beginning of a line.
field;Dn	Round decimal fractions	Specify the number of decimal digits of accuracy with a number, " <b>n</b> ". If <b>n=0</b> , the number is rounded to a whole number. The number ( <b>n</b> ) <i>must</i> be > 0 or = 0.
field;Ln	Left justify and	To left justify within a field width of " <b>n</b> " characters, follow the ;L with the number of column positions you want the field to occupy. If

Qualifier	Action	Discussion
	truncate	necessary, the data is truncated to fit into this length. Since non-numeric fields are left justified by default, the only effect of ;L on those fields is truncation. This qualifier does <i>not</i> affect DATE/TIME-valued fields.
field;N	Suppress consecutive duplicate values	If you do not want the same value for a field printed on consecutive rows of a report, add ;N to the field specification.
field;Rn	Right justify text	To right justify within a field of "n" characters, follow the ;R with that number. Right-justified data is not truncated; if "n" is not large enough, data spills into the next field's area causing confusing output. DATA TYPE field values of NUMERIC are right justified by default. However, computed expressions with numeric results are not right justified automatically.
field;Sn	Skip lines between fields	You can indicate a number of lines to skip before printing a field by using ;Sn. Without a number, ;S skips a single line. If your field has a null value, "n" lines are skipped anyway. You cannot use ;S with a WORD-PROCESSING-type field. To skip one line before a WORD-PROCESSING field, precede the field with an additional print specification like this:  THEN PRINT FIELD: "" ;s
field;T	Use field TITLE as header	If you want to use the field's TITLE, as defined in the data dictionary, instead of its LABEL in the header, add ;T.
field;Wn	Wrap text	The ;W suffix splits a field that is too long for its field column width at word boundaries (spaces) and prints it out fully on two or more rows. You can optionally follow the ;W with the number of column positions to be occupied by each line of output. If the field's data dictionary definition says to always print in word-wrap mode, DATA TYPE field values of WORD-PROCESSING are automatically wrapped. The ;W suffix overrides the ;R or ;L suffixes; <i>do not use them together</i> .
field;X	Suppress header and inter-column spaces	Follow the field specification with ;X to suppress the two spaces normally inserted before a field and the column header for the field. The result is concatenation of the field with the field that came before it. The ;X suffix is often used to add a literal caption to a field.
field;"xxx"	Customize header	The default header for columns of a report is the field label (for fields) or a computed expression (for "on the fly" computed expressions). To change the header, follow the field label with a semicolon (;) and the column header you want. Enclose the header in quotes. When possible, spaces wrap the substitute header within a print width obtained from the field's data definition. For example:  THEN PRINT FIELD: DOB;"Date of Birth"  THEN PRINT FIELD: DOB;"Date_of_Birth"  The first specification prints the header on two lines; the second prints it on one line (with underscores). To suppress the header, add ;"" to the field.

Qualifier	Action	Discussion
field;Yn	Set start row position	You can start printing a field on any line on the page. If "n" is positive, the field is printed on that line as counted from the top of the page. If it is negative, it is printed on that line as counted from the bottom. When specifying ;Yn, you must account for any page header that is displayed.
"xxx"	Insert a literal	<p>At the "PRINT FIELD:" prompt enclose a free text literal in quotes. The literal is inserted into the body of the report. For example, the following specifications begin each entry's display with a caption and NAME:</p> <pre>FIRST PRINT FIELD: "Patient's name:" THEN PRINT FIELD: NAME;"</pre> <p><b>OR</b></p> <pre>FIRST PRINT FIELD: "Patient's name:" THEN PRINT FIELD: NAME;X</pre> <p> <b>NOTE:</b> The header for the NAME field is suppressed in both examples.</p>

You can string together several of these print qualifiers at the "PRINT FIELD:" prompt. For example:

**Figure 21: Print—Stringing several print qualifiers together**

```
THEN PRINT FIELD: +WEIGHT;S1;C3;L6;"Patient Weight"
```

These specifications translate to: total, count, and give the mean for all values of the WEIGHT field, which must be a NUMERIC valued field. Skip one line before printing the values. Start the output in column three, left justify and truncate it to six character positions, and print the column heading "Patient Weight" on two lines.

Print

### 4.4.3.3 Saving Print Criteria (PRINT Templates)

PRINT templates let you store your print field specifications for use at a later time. You can retrieve the template at a later time by using the template name surrounded by square brackets. Template names must be unique with respect to any other PRINT template created for the same file. VA FileMan will notify you, if you try to create a template with a template name that already exists for a file. PRINT templates are stored in the PRINT TEMPLATE file (#.4).

To see a list of all existing templates that pertain to the file you are dealing with, enter a left bracket and a question mark ([?]) at the prompt where you can retrieve templates. For example:

**Figure 22: Print—Obtaining a list of all Print templates for a file**

```
FIRST PRINT FIELD: [?
```

This gives you a list of the PRINT templates available for your use with the file.

You are automatically prompted for a template name when it is determined that a considerable amount of information has been specified. If you choose five or more print fields, or if some of your print fields have special formatting specifications, you are prompted to store your print field specification in a PRINT template, as follows:

**Figure 23: Print—Creating a Print template**

```
STORE PRINT LOGIC IN TEMPLATE:
```

If you do not want to store your specifications in a template, simply press the **Enter** key. If you do want to save these print specifications for future reuse, however, respond to this prompt with the name of a template (either new or existing). Do *not* enclose the name in brackets; use brackets only to invoke a template, not to name one.

#### 4.4.3.3.1 Forcing Creation of a PRINT Template

Ordinarily, you are only asked whether you want to save your PRINT template if you enter five or more fields at the "PRINT FIELD:" prompt, or enter complex print specifications. However, by entering a right bracket (]) by itself at one of your field prompts, you can force the prompt that asks you for a template name, no matter how few fields you specify. You must designate at least one field to be printed to receive the template prompt, though.

For example:

**Figure 24: Print—Forcing the creation of a Print template**

```
PRINT FIELD: ] <Enter>
PRINT FIELD: NAME
THEN PRINT FIELD: <Enter>
HEADING: <Enter>
STORE PRINT LOGIC IN TEMPLATE: ID PRINT
```

#### 4.4.3.3.2 Using and Editing PRINT Templates

If a PRINT template has already been defined for a file, you can answer the "FIRST PRINT FIELD:" prompt with the template name, enclosed within brackets. For example:

**Figure 25: Print—Reusing a Print template**

```
FIRST PRINT FIELD: [PATIENT DATA]
WANT TO EDIT 'PATIENT DATA' TEMPLATE? NO// Y <Enter> (YES)
NAME: PATIENT DATA// <Enter>
READ ACCESS: <Enter>
WRITE ACCESS: <Enter>
```

After you retrieve a template, you are asked if you want to edit the template. If you answer YES (as shown above), you are allowed to edit the template name. To delete the template, enter an at-sign (@). After the "NAME:" prompt, you can edit the template security codes for READ ACCESS and WRITE ACCESS.

Next, you are prompted to edit each "PRINT FIELD:" value, containing each print field stored in the template. You can leave each print field as is, edit it, or delete it with the at-sign character (@).

Print

To insert a new print field ahead of the print field being displayed in your template, precede the print field you want to insert with a caret ("^"). See the following example of adding to a PRINT template (INPUT and SORT templates have this feature also):

**Figure 26: Print—Inserting a new print field**

```
FIRST PRINT FIELD: FIELD1// <Enter>
THEN PRINT FIELD: FIELD2// <Enter>
THEN PRINT FIELD: FIELD4// ^FIELD3
THEN PRINT FIELD: FIELD4// <Enter>
```

To insert a Multiple field and its subfields ahead of the field currently displayed in the template, do the following:

1. Enter a caret ("^") followed by the name of the Multiple field.
2. Ignore the default presented at the "THEN PRINT FIELD:" prompt and insert each subfield by entering a caret ("^") followed by the name of that subfield.
3. After all subfields have been added, enter a caret ("^") and a right bracket (^]).

For example:

**Figure 27: Print—Inserting a Multiple print field**

```
FIRST PRINT FIELD: FIELD1// <Enter>
THEN PRINT FIELD: FIELD2// <Enter>
THEN PRINT FIELD: FIELD3// ^MultiField <Enter> (multiple)
THEN PRINT MultiField SUB-FIELD: FIELD3// ^SubField1
THEN PRINT MultiField SUB-FIELD: FIELD3// ^SubField2
THEN PRINT MultiField SUB-FIELD: FIELD3// ^]
THEN PRINT FIELD: FIELD3//
```

#### 4.4.3.4 The CAPTIONED PRINT Template: [CAPTIONED

Every file has a pre-defined CAPTIONED PRINT template that you can select at the "PRINT FIELD:" prompt. The CAPTIONED PRINT Template can be very useful; it prints out all fields for each entry in your report. Use it is a quick way to get all the fields for each entry in your report (much quicker than entering each field individually)!

Use it as follows:

**Figure 28: Print—Choosing a Captioned Print template**

```
FIRST PRINT FIELD: [CAPTIONED
```



#### 4.4.3.4.1 COMPUTED Fields and Record Numbers in CAPTIONED OUTPUT

When you choose the CAPTIONED PRINT Template, you're prompted with "Include COMPUTED fields". At this prompt, you can decide whether to include COMPUTED-type fields in the output for each record, as well as record numbers.



**REF:** For more information on COMPUTED fields, see the "COMPUTED Data Type" section in the *VA FileMan Advanced User Manual*.

**Figure 29: Print—Dialogue encountered when creating a Captioned Print report**

```

FIRST PRINT FIELD: [CAPTIONED

Include COMPUTED fields: (N/Y/R/B): NO// ?

Enter a code from the list.
  Select one of the following:

      N          NO - No record number (IEN), no Computed Fields
      Y          Computed Fields
      R          Record Number (IEN)
      B          BOTH Computed Fields and Record Number (IEN)

Include COMPUTED fields: (N/Y/R/B): NO// BOTH <Enter> Computed Fields and
Record Number (IEN)

*****
Heading (S/C): NEW PERSON LIST// <Enter>
DEVICE: <Enter>

```

#### 4.4.3.5 Printing Statistics Only (Totals, Counts, etc.)

If you precede *all* of the fields that you choose for printing at the "PRINT FIELD:" prompts with a +, &, !, or #, the individual field values are not printed in your report. Instead, you only get the requested statistics, which (depending on the print qualifiers and fields used) can be the total, count, mean, maximum, minimum, and/or standard deviation.



**REF:** For more information about print qualifiers, see the "[Print Qualifier Reference](#)" section.

## 4.4.4 Other Print Features

- [Multiple Copies of a Print](#)
- [Report Headings](#)
- [Suppressing Report Headings \(and Page Feeds\)](#)
- [Custom Headings and Footers](#)
- [Printing Sort Criteria in Header or Footer](#)

### 4.4.4.1 Multiple Copies of a Print

To generate more than one copy of a report, you must have an output device on your system (such as a spool device or a sequential disk processor [SDP]) which stores data in a linear format. If you choose to send the output to such a device at the "DEVICE:" prompt, the system prompts you as follows:

**Figure 30: Print—Generating multiple copies of a report**

```
ENTER NUMBER OF COPIES: 4
OUTPUT COPIES TO DEVICE: PRINTER
```

In this example, you are asking to print four copies to the device called PRINTER.

You must be using VA FileMan with Kernel or with a device handler similar to Kernel's to produce multiple copies. If you exceed the maximum spool lines allowed you as defined in the KERNEL SYSTEM PARAMETERS file (#8989.3), your report will be stopped.

### 4.4.4.2 Report Headings


The heading in a report is what is printed at the top of each report page. Ordinarily, there is a heading (report title), date of report, time of report, page number, and column headers (field titles for fields in the output), as shown below:

**Figure 31: Print—Example of a report heading**

```
PATIENT LIST                JUL 19,1996  14:49    PAGE 1
SSN          NAME
-----
```

You can customize the report heading when you print. If you ask for help at the "Heading (S/C):..." prompt, VA FileMan displays the following instructions:

**Figure 32: Print—Dialogue to customize report headings: Sample user entries at prompts**

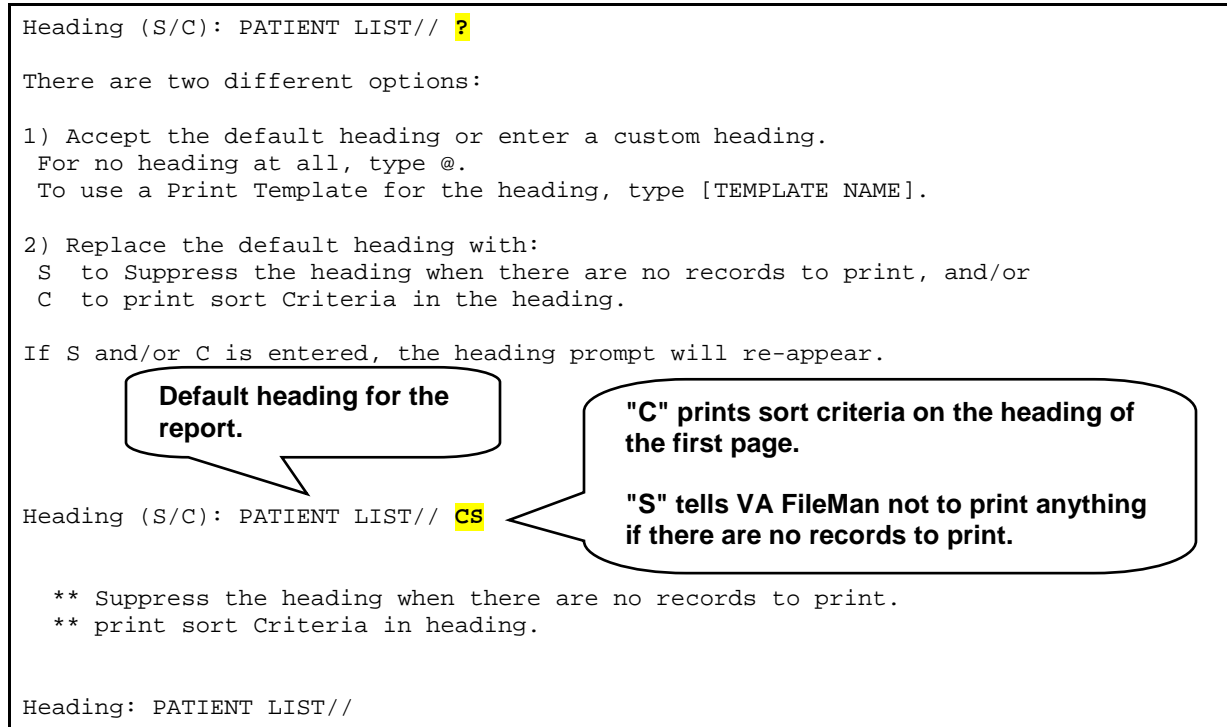


Thus, at the "Heading (S/C):" prompt, you can:

- Enter "S" to not print the heading (i.e., not print anything), if no records are found to print.
- Enter "C" to print sort criteria in the report heading on the first page.
- Enter a new heading to replace the default heading or press the **Enter** key to accept the default heading.

#### 4.4.4.3 Suppressing Report Headings (and Page Feeds)

If you do not want headings to be printed in your output, enter an at-sign (@) at the "HEADING:" prompt:

**Figure 33: Print—Suppressing headings on a report**



If you want neither headings nor page feeds in your output, enter two at-signs (@@) at the "HEADING:" prompt.

Print

If you suppress the headings in your output and also save your print criteria in a PRINT template, you will be asked:

**Figure 34: Print—Confirming the suppression of headings in a Print template**

```
DO YOU ALWAYS WANT TO SUPPRESS SUBHEADERS WHEN PRINTING TEMPLATE?
```

Subheaders are the names of SORT BY fields you see in the body of your report, when you don't include those SORT BY fields as print fields. To automatically suppress all subheaders, answer YES at this prompt.



**NOTE:** When you are sorting, you can suppress subheaders individually at each sort level by entering an at-sign (@) in front of the field on which you are sorting.

**REF:** For more information, see the "[Sorting](#)" section.

#### 4.4.4.4 Custom Headings and Footers

You can print complex, multi-line headings by using a PRINT template to hold your heading format. Suppose, for example, that you want the patient's name and date of birth to appear as the heading at every page break. You could first create a PATIENT HEADER template as follows:

**Figure 35: Print—Creating a Print template with a custom header**

```
SORT BY: NAME
START WITH NAME: FIRST// <Enter>
FIRST PRINT FIELD: "PATIENT NAME: "
THEN PRINT FIELD: NAME
THEN PRINT FIELD: "DATE OF BIRTH: ";C50
THEN PRINT FIELD: DATE OF BIRTH
THEN PRINT FIELD: <Enter>
*****
Heading (S/C): PATIENT LIST// <Enter>
STORE PRINT LOGIC IN TEMPLATE: PATIENT HEADER
Are you adding 'PATIENT HEADER' as a new PRINT TEMPLATE? No// YES <Enter>
(Yes)
DEVICE:
```

Then, at a later time, when you do another print, at the heading prompt, enter the template name:

**Figure 36: Print—Selecting an existing Print template with a custom header**

```
Heading (S/C): PATIENT LIST// [PATIENT HEADER]
```

When you enter a PRINT template name such as PATIENT HEADER at the "Heading (S/C):..." prompt, the format of the template is used as a replacement for the full normal report heading on each page of your report (it replaces the full default heading, including title, time, date, page number, field names, and separator line). Thus, the header, as defined above, would contain *no* column headings and would *not* be separated from the body of the report by a horizontal line or even a blank line. You can add these in yourself as print fields in the template, if you so desire.

#### 4.4.4.4.1 Custom Footers

You can also add footers to the bottom of each page of a report. First, save the contents of the footer in a template as you do to create a custom heading. Then, use the template at the "HEADING:" prompt with a dash (-) before the first bracket:

**Figure 37: Print—Including a custom footer in a Print template**

```
Heading (S/C): PATIENT LIST// -[PATIENT FOOTER]
```

You can specify both a heading and a footer like this:

**Figure 38: Print—Including a custom header and footer in a Print template**

```
Heading (S/C): PATIENT LIST// [PATIENT HEADER]-[PATIENT FOOTER]
```



**NOTE:** Specifying only a footer at the "Heading (S/C):" prompt suppresses the default heading. If you need a header as well as footer, you must use custom templates for both.

#### 4.4.4.5 Printing Sort Criteria in the Heading or the Footer

You can print the sort criteria (values used to sort the report) in the header in two different ways:

- At the "Heading (S/C):" prompt, entering "C" prints the sort criteria in the automatically generated report heading.
- Use the [sort qualifier ;Pa-b](#) to save the FROM and TO values used to sort a report. Then, in a customized header or footer (stored in SORT templates), you can retrieve the sort values with PARAM(a-string).



**REF:** For more information, see the description of the [;Pa-b](#) sort qualifier above.

Print

## 5 Search

When you print reports, you can print a subset of the total number of file entries, if you sort your output. For example, by sorting on a file's DATE field, you could sort for entries from October 1<sup>st</sup> to October 15<sup>th</sup>, and only print entries whose DATE field falls in that sort range.

Selecting a subset of entries by sorting works well if the subset of entries you would like to print can be isolated based on a contiguous sort range. However, what if you would like a different set of entries (e.g., only entries whose DATE field is equal to either September 1<sup>st</sup>, October 1<sup>st</sup>, or November 1<sup>st</sup>)? You cannot do this with a sort range, because the sort range that includes September 1<sup>st</sup> and November 1<sup>st</sup> would include every entry between the two dates.

When you use VA FileMan's search capabilities, you have much more control over what entries you select from a file for printing.

### 5.1 How to Search

As with VA FileMan's print capabilities, there are two methods in which you can use VA FileMan's search features:

- An option that has been set up already to allow you to search a particular file.
- VA FileMan's Search File Entries option, which lets you perform a search on any file to which you have access.

In either case, use of VA FileMan's search features is very similar. In most cases, the only difference is that with the Search File Entries option, you have to choose which file to search.

The steps in searching are:

1. Enter the search conditions (truth tests) to perform on each entry.
2. Specify how the search conditions should be combined (link them together with logical **ANDs** & **ORs**) to select records.
3. Format your output (i.e., choose the sort order and print fields).

## 5.2 Search Steps

### 5.2.1 Enter Conditions

First, you must enter one or more search conditions to test each entry. For each condition you choose a field in the entry and a condition to compare the field against.

For example, you could check if an entry's DATE field is NULL, GREATER THAN 10/1/96, or EQUALS 10/1/96.

#### 5.2.1.1 Search Condition Tests

[Table 3](#) lists the six possible search conditions against which you can test entries. It also includes the symbol that represents the condition (if any), for what field types the condition can be used, and the description/arguments of each condition:

**Table 3: Search—Condition Tests**

Condition	Symbol	For Field Types	Description/Arguments
NULL	(none)	All except WORD-PROCESSING.	NULL returns true if the field in question is empty (null). No argument is required.
CONTAINS	[	NUMERIC, FREE TEXT, WORD-PROCESSING, MUMPS, SET OF CODES, and COMPUTED fields.	Enter a character string that should be contained in matching entry fields.
MATCHES	(none)	NUMERIC, FREE TEXT, MUMPS, COMPUTED, and DATE/TIME fields.	Enter a MUMPS pattern match. The pattern must be valid for the MUMPS pattern match operator.
LESS THAN	<	NUMERIC, COMPUTED, SET OF CODES, FREE TEXT, and DATE/TIME fields.	Enter a value that a matching entry field should be less than. Non-NUMERIC fields are evaluated as if they were numbers. Thus, strings beginning with alpha characters are evaluated as zero.
EQUALS	=	All data except WORD-PROCESSING.	Enter a value to which a matching entry field should be equal.
GREATER THAN	>	NUMERIC, COMPUTED, SET OF	Enter a value to which a matching entry field should be less than. Non-NUMERIC fields



Condition	Symbol	For Field Types	Description/Arguments
		CODES, FREE TEXT, and DATE/TIME fields.	are evaluated as if they were numbers. Thus, strings beginning with alpha characters are evaluated as zero.

When you start your search, VA FileMan asks you to enter a field, a condition, and a value to which the field is compared.

For example, to create a search condition that would find all entries whose DATE ACCESS CODE LAST CHANGED field contains a date older than 120 days in the past, you would enter the following:

**Figure 39: Search—Example of a search condition**

```
-A- SEARCH FOR FIELD: DATE ACCESS CODE LAST CHANGED
-A- CONDITION: LESS THAN
-A- GREATER THAN: T-120 <Enter> (Jun 20, 1995)
```



**NOTE:** Each prompt above begins with "-A-"; what you've entered becomes search condition "A."

Once you enter your first search condition, you can enter additional search conditions, if you wish. VA FileMan assigns the letter "A" to the first search condition, "B" to the second search condition (if any), "C" to the third, and so on.

Here is an example of entering two truth tests:

**Figure 40: Search—Example of two truth tests**

```
-A- SEARCH FOR FIELD: DATE ACCESS CODE LAST CHANGED
-A- CONDITION: LESS THAN
-A- GREATER THAN: T-120 <Enter> (Jun 20, 1995)

-B- SEARCH FOR FIELD: ACCESS CODE
-B- CONDITION: 'NULL

-C- SEARCH FOR FIELD: <Enter>
```

## 5.2.2 Combine Conditions

After defining a series of conditions (A, B, etc.), you combine the conditions to yield the complete test that an entry must satisfy to be selected in the search. The complete test is a logical combination of tests A, B, etc., using **AND**, **OR**, and **NOT**.

### 5.2.2.1 Operators for Combining Search Conditions

[Table 4](#) lists the possible operators to combine search conditions:

**Table 4: Search—Condition Operators**

Condition	Symbol	Description	Example
AND	&	For truth test to be true, the conditions on both sides of the AND operator must be true. The "&" symbol can be omitted (i.e., AB is the same as A&B).	<b>A&amp;B</b>
NOT	' or -	For truth test to be true, the condition following NOT (i.e., single quote, "" or dash "-") must be false. If A is false, 'A evaluates to true.	<b>'A</b>
OR	Enter on new line.	For truth test to be true, only one of the conditions that are combined with OR needs to be true. If A is true and B is false, A OR B evaluates to true.	<b>IF: A &lt;Enter&gt; OR: B &lt;Enter&gt;</b>

For example, if you just want to find all entries for which search condition A is true, you would enter:

**Figure 41: Search—Example of a single search condition using a truth test**

```
-B- SEARCH FOR FIELD: <Enter>
IF: A
OR: <Enter>
```

A more complicated search might have a number of search conditions (e.g., A, B, C, and D). Thus, for example, to find all entries which either: 1) satisfy both truth tests A and B, or 2) do not satisfy truth test C, but satisfy truth test D, you could combine search conditions as follows:

**Figure 42: Search—Example of a multiple search condition using truth tests**

```
-E- SEARCH FOR FIELD: <Enter>  
IF: A&B  
OR: 'C&D  
OR: <Enter>
```

In the example above, the logic says "if A and B, or if not C (but D)".

## 5.2.3 Format Output

The remaining steps to finish your search are to choose your sorting criteria (same as with printing) and to choose the fields to print for each matched entry (also the same as with the printing).

A complete search (entering search conditions, combining search conditions, and finishing the search) is shown below:

**Figure 43. Search—Dialogue to a completed search: Sample user entries at prompts and sample report**

```

Select VA FileMan Option: SEARCH <Enter> File Entries

OUTPUT FROM WHAT FILE: PATIENT// NEW PERSON <Enter> (88362 entries)

-A- SEARCH FOR NEW PERSON FIELD: DATE ACCESS <Enter> CODE LAST CHANGED
-A- CONDITION: > <Enter> GREATER THAN
-A- GREATER THAN DATE: T-50 <Enter> (DEC 25, 2012)

-B- SEARCH FOR NEW PERSON FIELD: ACCESS CODE
    1 ACCESS CODE
    2 ACCESS CODE Want to edit ACCESS CODE (Y/N)
CHOOSE 1-2: 1 <Enter> ACCESS CODE
-B- CONDITION: 'NULL'

-C- SEARCH FOR NEW PERSON FIELD: <Enter>

IF: AB
    DATE ACCESS CODE LAST CHANGED GREATER THAN the entire day DEC 25,2012 (T-50)
and ACCESS CODE NOT NULL
OR: <Enter>

STORE RESULTS OF SEARCH IN TEMPLATE: ACCESS CODE SEARCH
Are you adding 'ACCESS CODE SEARCH' as a new SORT TEMPLATE? No// Y <Enter> (Yes)
DESCRIPTION:
No existing text
Edit? NO// <Enter>

SORT BY: NAME// <Enter>
START WITH NAME: FIRST// <Enter>
FIRST PRINT FIELD: NAME
    1 NAME
    2 NAME COMPONENTS
CHOOSE 1-2: 1 <Enter> NAME
THEN PRINT FIELD: DATE ACCESS CODE <Enter> LAST CHANGED
THEN PRINT FIELD: <Enter>
Heading (S/C): NEW PERSON SEARCH// <Enter>
DEVICE: <Enter> SSH VIRTUAL TERMINAL Right Margin: 80// <Enter>

NEW PERSON SEARCH                                FEB 13,2013 17:17 PAGE 1
                                                DATE ACCESS
                                                CODE LAST
NAME                                                CHANGED
-----
FMPERWSON,ONE                                FEB 13,2013
  
```

1. Enter search conditions.

2. Combine search conditions.

3. Choose sort order.

4. Choose print fields.

5. Search results are printed.

```

FMPERSON, TWO                                JAN 16, 2013

                                         2 MATCHES FOUND.

Press RETURN to continue...

```

The previous search ([Figure 43](#)) found two entries that matched the search conditions (i.e., DATE ACCESS CODE LAST CHANGED greater than 2/2/99 and ACCESS CODE *not* null).

## 5.3 Details and Features

### 5.3.1 Sorting and Searching

As you may recall from Chapter 4, "[Print](#)," you can print a subset of entries from a file by sorting (i.e., printing only those entries that fall between a sort-from value and a sort-to value). Searches also select a subset of entries from a file, although with more flexibility than with sorting.

When you print your output from a search, you are also given a chance to sort the output. This means that while searching selects a subset of entries to print, through sorting you can further restrict that subset of entries that is going to print. How does sorting affect the output of the searches?

The answer is that VA FileMan uses *both* your search and sort order to select entries. You enter the search criteria before you enter the sort order. However, the selection of entries indicated in the sort ("START WITH ... GO TO" dialogue) sorting is done first, after which the search conditions are applied to all remaining entries to determine the final set of matching entries.

### 5.3.2 SEARCH Templates

You can save the results of your search in a SEARCH template. Doing this allows you to:

- Reuse your search criteria to perform another search.
- Reuse your search results (the list of entries selected as a result of both the search and the sort order).

This is because SEARCH templates store both your search criteria and also the list of entries that is found in your search. SEARCH templates are stored in the SORT TEMPLATE file (#.401).

### 5.3.2.1 Creating SEARCH Templates

The place to save your search criteria and results in a SEARCH template is right after you specify your search conditions. At this point, you are prompted:

**Figure 44: Search—Creating a Search template**

```
STORE RESULTS OF SEARCH IN TEMPLATE:
```

You can create a template at this prompt. Because SEARCH templates are stored in the same file as SORT templates (the SORT TEMPLATE file, #.401), you can't give a SEARCH template the same name as a SORT template. To avoid creating a SEARCH template, just press the **Enter** key at this prompt. Usually, only the creator of a SEARCH template can use it.

### 5.3.2.2 Reusing Search Criteria Stored in a SEARCH Template

Whenever you do a search, you can reuse the search criteria (i.e., your combined search conditions) stored in a SEARCH template. To do this, enter the bracketed SEARCH template name at the first "SEARCH FOR FIELD:" prompt:

**Figure 45: Search—Reusing a Search template at the "SEARCH FOR FIELD" prompt**

```
-A- SEARCH FOR FIELD: [RESEARCH 1]
```

A new search will be performed with the recalled search criteria.

### 5.3.2.3 Reusing Search Results in Another Search

Whenever you do a search, you can recall the results of a previous search (the list of entries found in the search) at the "SORT BY:" prompt. In this case, the new search is done against the entries in the SEARCH template, rather than the entire file. Answer the "SORT BY:" prompt with the bracketed SEARCH template name:

**Figure 46: Search—Reusing a Search template at the "SORT BY" prompt**

```
SORT BY: NAME// [RESEARCH 1]
```

### 5.3.2.4 Reusing Search Results in a Print

When doing VA FileMan prints, you can also recall the results of a previous search at the "SORT BY:" prompt. In this case, the entries saved in the SEARCH template are the ones printed in the report. This is

handy if you do a search, collect a group of entries, and then want to print several different reports based on the same set of entries.

### 5.3.3 Internal vs. External Field Values for Search Conditions

- For all SET OF CODES field types, you must use external values for the search conditions.
- For DATE/TIME field types, you can enter internal or external values for the search conditions.
- For other DATA TYPE field values (i.e., NUMERIC, COMPUTED, and FREE TEXT), there is no difference between internal and external value.
- For POINTER TO A FILE or VARIABLE-POINTER fields, the sort is based on the field type of the .01 field of the pointed-to file.

### 5.3.4 Print Number of Matches Found

If you only want to print the number of matches found, without printing any of the matched entries, answer the "FIRST PRINT FIELD:" prompt by simply pressing the **Enter** key.

### 5.3.5 Searching Multiples

Searching on multiple-valued fields, like the DIAGNOSIS field in the PATIENT file, is a special situation. You must specify whether a truth test is to be considered met if *at least one* of the subentries for an entry passes the test or if *all* the subentries must pass the test.

When truth tests contain a negative (contains a single quote "'"), you can even specify that an entry with *no* subentries should automatically pass the test.

Suppose, for example, that you want to search for all patients who were born before 1900 and who *don't* have a DIAGNOSIS containing the word ANGINA:

**Figure 47: Search—Dialogue of a search on a multiple field: Sample user entries at prompts**

```
Select VA FileMan Option: SEARCH <Enter> File Entries
OUTPUT FROM WHAT FILE: PATIENT// <Enter>
-A- SEARCH FOR PATIENT FIELD: DATE OF BIRTH
-A- CONDITION: < <Enter> LESS THAN
-A- LESS THAN DATE: 1920 <Enter> (1920)
-B- SEARCH FOR PATIENT FIELD: SERVICE CONNECTED
  1 SERVICE CONNECTED CONDITIONS (multiple)
  2 SERVICE CONNECTED PERCENTAGE
  3 SERVICE CONNECTED?
CHOOSE 1-3: 1 <Enter> SERVICE CONNECTED CONDITIONS (multiple)
-B- SEARCH FOR PATIENT SERVICE CONNECTED CONDITIONS SUB-FIELD: SERVICE
CONNECTED CONDITIONS
-B- CONDITION: [ <Enter> CONTAINS
-B- CONTAINS: ANGINA
-C- SEARCH FOR PATIENT SERVICE CONNECTED CONDITIONS SUB-FIELD: <Enter>
-C- SEARCH FOR PATIENT FIELD: <Enter>
IF: A&'B <Enter> DATE OF BIRTH LESS THAN 1920 (1920)
and not PATIENT SERVICE CONNECTED CONDITIONS CONTAINS (case-
insensitive) "ANGINA"
DO YOU WANT THIS SEARCH SPECIFICATION TO BE CONSIDERED TRUE FOR CONDITION -B-
  1) WHEN AT LEAST ONE OF THE 'SERVICE CONNECTED CONDITIONS' MULTIPLES
SATISFIES IT
  2) WHEN ALL OF THE 'SERVICE CONNECTED CONDITIONS' MULTIPLES SATISFY IT
  3) WHEN ALL OF THE 'SERVICE CONNECTED CONDITIONS' MULTIPLES SATISFY IT,
OR WHEN THERE ARE NO 'SERVICE CONNECTED CONDITIONS' MULTIPLES
CHOOSE 1-3: 1// 3
```



For this example, choosing the following number means:

**#1 = Find people born before 1920 who have *at least one* SERVICE CONNECTED CONDITION that does *not* contain "ANGINA."**

**#2 = Find people born before 1920 who have *at least one* SERVICE CONNECTED CONDITION and *none* containing "ANGINA."**

**#3 = Find people born before 1920 who either have no SERVICE CONNECTED CONDITION at all or whose SERVICE CONNECTED CONDITIONS do *not* contain "ANGINA."**

OR:

STORE RESULTS OF SEARCH IN TEMPLATE:

Another ambiguity about searches of multiple fields is how to interpret two separate truth tests on the same subfield.

For example, if you are searching for DIAGNOSIS containing ANGINA and also for DIAGNOSIS containing PECTORIS, do you want to find:

- Only those patients who have ANGINA and PECTORIS in the *same* diagnosis name?
- Patients who might have one diagnosis containing ANGINA and a *different* diagnosis containing PECTORIS?

Whenever you combine two truth tests (e.g., A and B) pertaining to the same multiple-valued field, you are prompted:

**Figure 48: Search—Prompts encountered when searching on a Multiple field**

CONDITION -A- WILL APPLY TO THE SAME MULTIPLE AS CONDITION -B-  
OK? YES//

In our example ([Figure 47](#) and [Figure 48](#)), a YES answer means that ANGINA and PECTORIS *must* be found in the *same* DIAGNOSIS. If you answer NO, you can specify how A and B will apply:

**Figure 49: Search—Additional prompts encountered when searching on a Multiple field**

```
DO YOU WANT THIS SEARCH SPECIFICATION TO BE CONSIDERED TRUE FOR CONDITION -A-
    1) WHEN AT LEAST ONE OF THE 'DIAGNOSIS' MULTIPLES SATISFIES IT
    2) WHEN ALL OF THE 'DIAGNOSIS' MULTIPLES SATISFY IT
CHOOSE 1-2: 1// 2
DO YOU WANT THIS SEARCH SPECIFICATION TO BE CONSIDERED TRUE FOR CONDITION -B-
    1) WHEN AT LEAST ONE OF THE 'DIAGNOSIS' MULTIPLES SATISFIES IT
    2) WHEN ALL OF THE 'DIAGNOSIS' MULTIPLES SATISFY IT
CHOOSE 1-2: 1// <Enter>
```

In this case, all the diagnoses would need to satisfy the A condition, but only one (or more) would need to satisfy the B condition.



**NOTE:** Applying search tests to fields in a multiple selects entries at the top level of the file. VA FileMan's searching features cannot be used to select specific subentries.

## 6 Browser

If your site is using Kernel, your site manager may have set up an output device called BROWSER. If so, you can view any report *on the screen* instead of *on paper*. Do this by printing your report to the **BROWSER** device instead of the HOME device or a printer.

The Browser makes it very easy to view reports on screen. Its main features are:

- Scroll forwards *and backwards* through a report. This means you don't lose reports "off the top" of the screen, like you do when you print to the HOME device.
- Use the Search feature to find and immediately jump to any text in a report.
- Copy text from the report to the VA FileMan Clipboard; later, if you're editing a mail message or other WORD-PROCESSING-type field with the Screen Editor, you can paste from the clipboard.



**REF:** For more information on the Screen Editor, see Chapter [14](#), "[Screen Editor](#)."


As you become accustomed to using the BROWSER device, you may find that you start to save paper by viewing reports that otherwise you would end up printing.

There is also a [Browser option](#) that lets you browse the contents of any WORD-PROCESSING-type field to which you have access.

## 6.1 Browser Screen

[Figure 50](#) illustrates the Browser screen:

Figure 50: Browser—Sample screen component parts

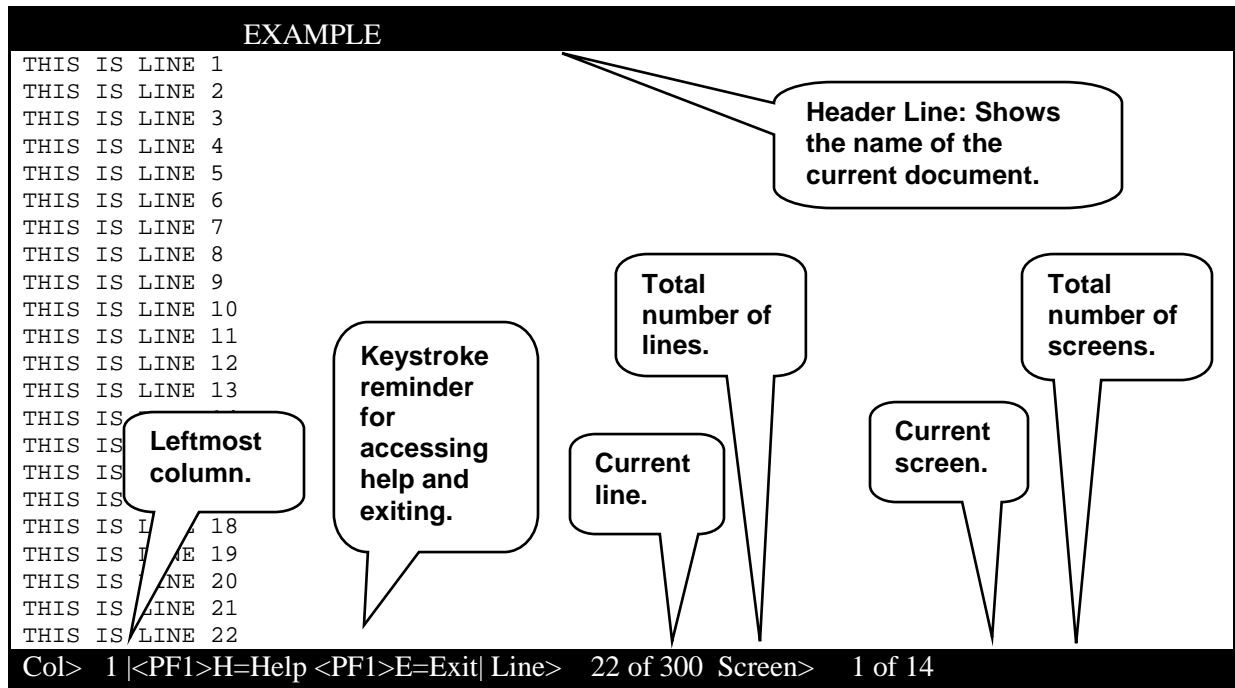

## 6.2 Browser Features

The following Browser features are described below:

- [Navigation Keystrokes](#)
- [Clipboard](#)
- [Search](#)
- [Online Help](#)
- [Other Features](#)
- [The Browser as an Option](#)

## 6.2.1 Cursor Movement (Navigation Keystrokes)

[Table 5](#) lists the keystrokes you use to navigate while in the Browser:


**Table 5: Browser—Navigation Keystrokes**

To	Press
Scroll up or down one line at a time	<ArrowUp> and <ArrowDown>
Scroll right 22 columns	<ArrowRight>
Scroll to rightmost edge	<PF1><ArrowRight>
Scroll left 22 columns	<ArrowLeft>
Scroll to leftmost edge	<PF1><ArrowLeft>
Page Down	<PF1><ArrowDown>, <NextScreen>, or <PageDown>
Page Up	<PF1><ArrowUp>, <PrevScreen>, or <PageUp>
Go to Top	<PF1>T
Go to Bottom	<PF1>B
Go to specific line, screen, or column	<PF1>G At prompt, enter a number, which you can precede with "S" (screen), "L" (line), or "C" (column). The cursor is re-positioned at the corresponding screen, line, or column. If you enter a number only, screen is assumed.
Exit	<PF1>E or <PF1>Q

## 6.2.2 Clipboard

[Table 6](#) lists the keystrokes you use to work with the Browser's Clipboard:

**Table 6: Browser—Using the Browser Clipboard**

To	Press
Copy Text to the VA FileMan Clipboard	<p><b>&lt;PF1&gt;C</b></p> <p>At the "Copy Text Line(s) to Paste Buffer &gt;" prompt, specify the lines in the document to copy. You can enter:</p> <p><b>#: #</b></p> <p>For example, "<b>3:10</b>" would copy text from line 3 to line 10 in the document, and make that the contents of the clipboard.</p> <ul style="list-style-type: none"> <li>• <b>#: #A</b> The "<b>A</b>" means append. For example, "<b>3:10A</b>" would copy text from line 3 to line 10 in the document, and append it to any existing text in the clipboard.</li> <li>• <b>*</b> Entering "<b>*</b>" copies all text in the document to the clipboard.</li> <li>• <b>*A</b> The "<b>A</b>" means append. Entering "<b>*A</b>" appends all text in the document to any existing text in the clipboard.</li> </ul>
View Contents of the Clipboard	<p><b>&lt;PF1&gt;V</b></p> <p>This lets you view the current contents of the VA FileMan clipboard. To switch back to your document, enter <b>&lt;PF1&gt;E</b>.</p>
Paste Text from the Clipboard	<p>In VA FileMan's Screen Editor, you can paste the contents of the VA FileMan clipboard by entering <b>&lt;PF1&gt;V</b>.</p> <p> <b>REF:</b> For more information on the Screen Editor, see Chapter <a href="#">14</a>, "<a href="#">Screen Editor</a>."</p>

## 6.2.3 Search

[Table 7](#) lists the keystrokes you use to search for text in the Browser:

**Table 7: Browser—Searching in the Browser**

To	Press
Find a string or characters	<p><b>&lt;PF1&gt;F</b> or <b>&lt;FIND&gt;</b></p> <p>At the prompt, enter the string to find. You can specify the direction of the search by ending your <b>FIND</b> string with the <b>&lt;ArrowUp&gt;</b> or <b>&lt;ArrowDown&gt;</b>. If you just press the <b>Enter</b> key after the find string, the search direction is down.</p>
Next Find	<p><b>&lt;PF1&gt;N</b></p> <p>Finds the next occurrence of the search string from a previous <b>FIND</b> request.</p>

## 6.2.4 Online Help

[Table 8](#) lists the keystrokes you use to display and print help information in the Browser:

**Table 8: Browser—Online Help**

To	Press
Get Help	<p><b>&lt;PF1&gt;H</b> for Help Summary.</p> <p><b>&lt;PF1&gt;&lt;PF1&gt;H</b> for more help.</p>
Print Help	<p><b>&lt;PF1&gt;&lt;PF1&gt;&lt;PF1&gt;H</b></p> <p>This prints the online help text.</p>

## 6.2.5 Other Features

[Table 9](#) lists the keystrokes you use to perform miscellaneous tasks in the Browser:

**Table 9: Browser—Other Features**

To	Press
Repaint the Screen	<b>&lt;PF1&gt;P</b>
Print the Document	<p><b>&lt;PF1&gt;&lt;PF1&gt;P</b></p> <p>This feature allows you to print the document currently being displayed in the Browser. You can choose to print a header on each page, which will include the document title, the current date and time, and the page number. You can also choose whether to print the document in word wrap mode and whether to have word-processing windows (I) interpreted. This feature was released with Patch DI*22.0*169.</p>
Change the document title in the Browser header line	<p><b>&lt;PF1&gt;&lt;PF1&gt;&lt;ArrowDown&gt;</b> or <b>&lt;PF1&gt;&lt;PF1&gt;&lt;ArrowUp&gt;</b></p> <p>This feature lets you change the text in the Browser's header to some line in your report. Each time you press <b>&lt;PF1&gt;&lt;PF1&gt;&lt;ArrowDown&gt;</b> you set the Browser header line to the text of the next line down in your document (and vice-versa for <b>&lt;PF1&gt;&lt;PF1&gt;&lt;ArrowUp&gt;</b>).</p> <p>Typically, you might want to set the Browser's header line to the text in your report's header that contains field names for your report's data. You might need to press <b>&lt;PF1&gt;&lt;PF1&gt;&lt;ArrowDown&gt;</b> four or five times to get to your report's field header line. Then as you scroll through your report, the Browser header line contains the field names that match and help identify the data you're scrolling through.</p>
Switch to another document	<p><b>&lt;PF1&gt;S</b></p> <p>Adds another document to the active list of documents and switches to it. Choose another VA FileMan file, field and entry for the document to switch to.</p>
Return to previous document (after having switched at least once).	<p>Press "R"</p> <p>Pressed repeatedly, "R" returns you all the way back to your first document.</p>
Split Screen (while in Full Screen Mode)	<p><b>&lt;PF2&gt;S</b></p> <p>Screen splits into two separate scroll regions.</p>
Move Cursor to Lower Screen (in Split Screen Mode)	<b>&lt;PF2&gt; &lt;ArrowDown&gt;</b>
Move Cursor to Upper Screen (in Split Screen Mode)	<b>&lt;PF2&gt;&lt;ArrowUp&gt;</b>



To	Press
Resize screens (in Split Screen Mode)	<PF2><PF2><ArrowUp> and <PF2><PF2><ArrowDown>
Return to Full Screen from Split Screen Mode	<PF2>F

## 6.2.6 The Browser as an Option

As well as being able send output to the BROWSER device, the VA FileMan Browser is also available as an option under the Other submenu on VA FileMan's main menu. You can use this option to view the contents of any WORD-PROCESSING-type field that you have access to in the database. When you use this option, you are prompted for the file, WORD-PROCESSING field, and entry to view. By answering these prompts, you can view the contents of any accessible WORD-PROCESSING field in the Browser.



## 7 Editing Records



## 8 VA FileMan Prompts

Many VA VistA application packages have a *scrolling mode* interface. Scrolling mode works as follows:

1. The computer puts a prompt on your screen.
2. You enter a response to the prompt.
3. The computer places another prompt on the screen, scrolling down one line. Previous prompts move up and eventually off of your screen.

In scrolling mode, prompting occurs in the same predetermined order, in a sequence designed by the developer of the application. You enter and the computer stores your responses one at a time. And, unless you're familiar with a few timesaving scrolling mode techniques, you have to step through each prompt in a record before you can finish editing the record.

Recently developed VistA applications often use a *screen-oriented* interface (i.e., Screen Mode) for editing data. However, scrolling mode interfaces are still used quite heavily in VistA applications.



**REF:** For more information on Screen Mode, see Chapter [11](#), "[ScreenMan](#)."

After reading about a few of the scrolling mode operations discussed in this chapter, you should be able to enter and edit data in scrolling mode with a minimum number of keystrokes.

### 8.1 *The <Enter> Key*


To enter data in scrolling mode, you primarily enter data or commands at a prompt on your terminal screen. After typing a command or data at your terminal keyboard, you must send your response from your terminal to the computer. Pressing the Enter or Return key on your keyboard (abbreviated as **<Enter>** in examples) sends all of your typed input to the computer for action or storage.

If you type a response but fail to press the **Enter** key, the computer waits; it won't do anything until you tell it you've finished entering your response. Pressing the **Enter** key also tells the computer when you've decided to "enter" nothing at all. Whenever you press the **Enter** key without first entering data or a command, you tell the computer either to avoid taking action or to take the default action at the current prompt. The computer then moves on to the next prompt.

## 8.2 Standard Prompt Structure

The standard VA FileMan prompt consists of three parts:

**Figure 51: VA FileMan Prompts—Sample component parts of a prompt**

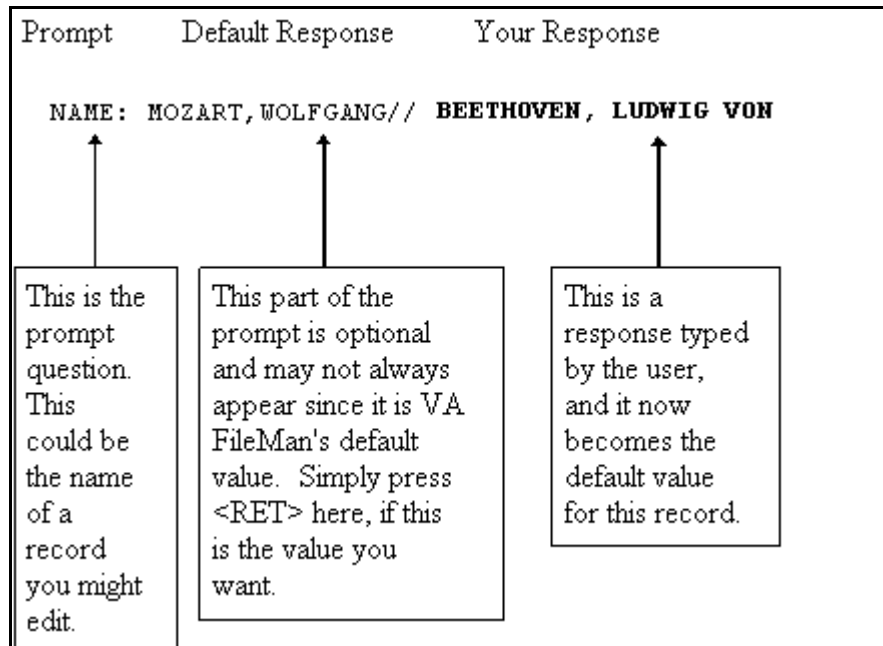

## 8.3 Responding to Prompts

When VA FileMan prompts you for a response, typically a colon (:) is used at the end of the prompt; the computer waits for a response. Prompts are often asking for the value of a field in a file, like the one shown below:

**Figure 52: VA FileMan Prompts—Asking for a response**

DATE OF BIRTH:

This type of prompt is waiting for you to enter a value, like **3 OCT 49**. Don't forget to complete your interaction by pressing the **Enter** key (<Enter>).

If the answer to the prompt question is a choice of several things, the prompt often starts with the word "Select", as in:

**Figure 53: VA FileMan Prompts—"Select-type" prompts, offering a choice**

Select PATIENT NAME:

If the question requires either a YES or NO response (in which case simply Y or N, upper- or lowercase, is acceptable), the prompt may end with a question mark, rather than by a colon:

**Figure 54: VA FileMan Prompts—"Yes/No-type" prompts**

ARE YOU SURE?



**REF:** For more information on the specific types of fields (DATE/TIME, NUMERIC, WORD-PROCESSING, FREE TEXT, etc.) and how to edit them, see Chapter 9, "[Field Type](#)."

## 8.4 Getting Online Help at Any Prompt (Enter ? or ??)

If you are not sure how to answer a prompt, help is always available. Just enter one question mark (?) to get brief help, or two question marks ("??") to get more detailed online help:

**Table 10. VA FileMan Prompts—Getting online help at any prompts using question marks**

Help Value	Description
?	Entering a single question mark at a prompt gets a single line of help.
??	Entering two question marks at a prompt gets more detailed help: a description of what values are acceptable, and/or a list of choices appropriate to the prompt where you entered the question marks.

## 8.5 Incorrect Responses


VA FileMan checks each answer to a prompt immediately after you enter it. If you answer a prompt incorrectly, VA FileMan "beeps," and displays two spaces and two question marks. You may be given an explanation of what was incorrect. Then, you're given a chance to respond to the prompt again.

## 8.6 Partial Responses

When you are choosing one of a set of responses, you can save keystrokes by not typing the full response. Type in only the first letter of first few letters representing the response that you desire. If the characters you enter uniquely identify one of the possible acceptable responses, VA FileMan "echoes back" the remaining characters and uses the matching choice as your response.

If more than one possible answers begin with the character(s) that you typed, VA FileMan displays the possible choices in a list, and asks you to choose which choice you want by number:

**Figure 55: VA FileMan Prompts—Dialogue to choose from a list in VA FileMan: Sample user entries at prompts**

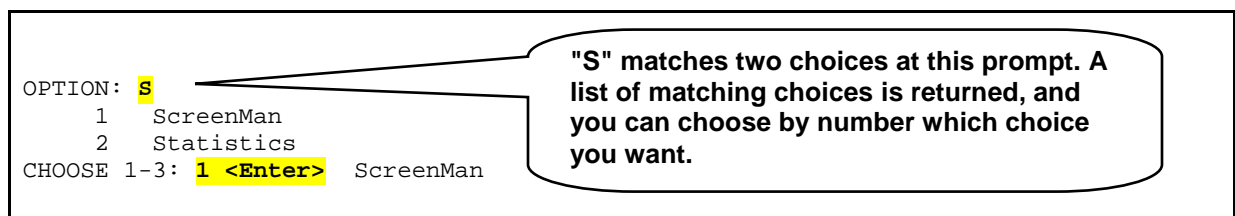


## 8.7 Default Responses

When you're working in VistA applications, the computer frequently present a *default* answer along with a prompt. This answer is built into the application program and represents the most probable response to the prompt that is being asked. These default answers are clearly identified by the double slash marks that follow them (//). If the default answer that is provided is correct, you need only press the **Enter** key to accept it.

For example:


**Figure 56: VA FileMan Prompts—Prompts with default responses**



In this case, if you press the **Enter** key, 000123123 is posted as your response to this prompt.

If, on the other hand, the default answer isn't what you need, enter the correct information at the prompt. For example:

**Figure 57: VA FileMan Prompts—Overriding the default response to a prompt**





When editing data stored in fields, defaults are used to present the current value of the field. As with any default prompt, if you just press the **Enter** key, the current value of the field is left unchanged. To change the value of the field, enter a new value and press the **Enter** key.

## 8.8 Longer Default Responses and the "Replace...With" Editor

When a default is 20 or more characters in length, it won't be followed by double slashes (//). Instead, it is presented with a "Replace" prompt:

**Figure 58: VA FileMan Prompts—Long responses employing the "Replace...With" editor**

```
ADDRESS 1: 301 Bayshore Boulevard  Replace
```

The "Replace" prompt employs the "Replace...With" Editor. At the "Replace" prompt, you can revise some or all of the existing default answer. To revise only a piece of the existing default response, type in any series of letters that are part of the existing default answer that you want to change and then press the **Enter** key. At the "With" prompt, enter the series of characters to replace the original series, and press the **Enter** key. At this point, the "Replace" prompt is presented again, so that you can enter additional corrections. If you're all done, however, just press the **Enter** key to finish working in the field and move on to the next prompt.

For example:

**Figure 59: VA FileMan Prompts—Changing a long response using the "Replace...With" editor**

```
ADDRESS 1: 301 Bayshore Boulevard  Replace Bay <Enter> With North <Enter>
Replace <Enter>
      301 Northshore Boulevard
ADDRESS 2:
```

To replace the entire default answer at a "Replace...With" prompt, simply enter three periods (...), called an ellipsis, at the "Replace" prompt. You are then able to replace the entire default with what you enter at the "With" prompt:

**Figure 60: VA FileMan Prompts—Replacing an entire entry using the ellipsis (...)**

```
ADDRESS 1: 301 Bayshore Boulevard  Replace ... <Enter> With 301 Folsom Street
<Enter>
Replace <Enter>
      301 Folsom Street
ADDRESS 2:
```

If you want to delete the entire text, enter the at-sign (@) at the "Replace" prompt:

**Figure 61: VA FileMan Prompts—Deleting an entire entry using the at-sign (@)**

```
ADDRESS 1: 301 Bayshore Boulevard  Replace @ <Enter>
          SURE YOU WANT TO DELETE? Y <Enter>  (Yes)
ADDRESS 2:
```



**NOTE:** The at-sign (@) is the command in many places to signal deletion, as you'll learn later in this chapter.

### 8.8.1.1.1 "Replace..." Prompt Shortcuts

[Table 11](#) lists shortcut responses when entering data at the "Replace" prompt:

**Table 11: VA FileMan Prompts—"Replace" prompt shortcuts**

Shortcut	Action
...	Replaces everything.
xxx...	Replaces everything starting from the characters "xxx" to the end.
...xxx	Replaces everything from the beginning up to and including the characters "xxx".
xxx...yyy	Replaces everything starting from "xxx" up to and including "yyy".
end or END	Appends what you enter at the "With" prompt to the end of the value.

## 8.9 Prompts with a List of Choices

If the acceptable answer to a field prompt is one of a set of choices, you can display the list of choices by entering one or two question marks. If that set of choices is short enough to be displayed on five or six lines, the choices are listed when you enter a single question mark.

Here is an example:

**Figure 62: VA FileMan Prompts—Displaying a list of choices**

```
Select PATIENT NAME: ?
ANSWER WITH PATIENT NAME
CHOOSE FROM:
  FMPATIENT,SEVEN
  FMPATIENT,18
  FMPATIENT,19
Answer must be 3-30 characters in length.

Select PATIENT NAME:
```

When you enter a question mark (?) and the entry list is long, you're asked if you want to see all the entries. Besides a YES or NO response, you can enter a caret (^) followed by a string of characters to see a list of all entries beginning with the one that starts with those characters.

The following example shows selection of an entry starting with an alpha character:

**Figure 63: VA FileMan Prompts—Displaying a subset of choices from a list**

```
Select PATIENT NAME: ?
ANSWER WITH PATIENT NAME, OR SSN
DO YOU WANT THE ENTIRE 1890-ENTRY PATIENT LIST? ^S
CHOOSE FROM:
  FMPATIENT,20
  FMPATIENT,21
  FMPATIENT,22
  FMPATIENT,23
  '^' TO STOP ^
  YOU MAY ENTER A NEW PATIENT, IF YOU WISH
  Enter patient name in "Last, First Middle" format [3-30 characters].

Select PATIENT NAME:
```

If you know the list is long and still want it to be displayed, you can enter *two* question marks (??) to force the display of the entire list.

## 8.10 Key Fields

During a data entry session, VA FileMan checks that the combination of fields that make up a key for a record is unique for all records in the file. If a single field makes up a key, VA FileMan checks for uniqueness as soon as that field is edited. If more than one field makes up a key (compound key), VA FileMan checks that the combination of new key field values is unique only at the end of the data entry session (unless otherwise instructed by the programmer). If a compound key is *not* unique, VA FileMan restores the fields that make up the key to their pre-edited values, and prints a message.

For example:

**Figure 64: VA FileMan Prompts—Entering a duplicate compound key**

```
Select ZZTEST NAME: 16 <Enter>  FMPATIENT,THREE  9900  SEP 03, 1932
ID NUMBER: 9900// 9800
DATE: SEP 3,1932// 1/21/1932 <Enter>  (JAN 21, 1932)

***** NOTE *****

Some of the previous edits are not valid because they create one or more
duplicate keys.  Some fields have been restored to their pre-edited
values.

Do you want to see a list of those fields? YES// <Enter>

The following field(s) have been restored to their pre-edited values:

File: ZZTEST File (#16999)
Key: A
  Record: 'FMPATIENT,THREE' (#16)

      Field: ID NUMBER(#1)
Invalid value: 9800
Restored to: 9900

      Field: DATE (#2)
Invalid value: JAN 21, 1932
Restored to: SEP 03, 1932
```

## 8.11 Special Responses to Field Prompts

### 8.11.1 Deleting a Field's Value (@)

When you want to delete an answer previously entered, without substituting any other answer, enter an at-sign (@) as a response to that prompt:

**Figure 65: VA FileMan Prompts—Deleting a field entry**

```
DATE OF BIRTH: May 21, 1946// @
SURE YOU WANT TO DELETE? YES
```

In this example, the date on file would be erased: there is no answer to the DATE OF BIRTH question; its value is now null. You are asked to confirm the deletion; this gives you a chance to change your mind before deleting the field.

### 8.11.2 Jumping to Another Field with the Caret ("^")

If you fail to notice a typing error until after you've pressed the **Enter** key and stored a field, you can still correct this error. What you need to do is go back to the field where the error occurred. You can usually accomplish this by using the *jump* command. This command requires entering a caret ("^") along with the name, or first few letters, of the field to which you wish to jump. Instead of moving to the next prompt, you jump to the prompt you identified, as shown below:

**Figure 66: VA FileMan Prompts—Using the caret ("^") key to "jump" to a specific field**

```
SSN: 000123123// ^DATE OF BIRTH
DATE OF BIRTH:
```

To get a list of the fields to which you can jump, enter a caret and a question mark (^?) at any field prompt.

You can use the caret to jump both forward and backward in a sequence of fields.



**TIP:** Sometimes, you may only need to update one field in a record. You can jump directly to that field once you start to edit that record. This can save time; you don't need to go through every field and prompt that precedes the one you want!

### 8.11.3 Exiting with the Caret ("^")

To exit or opt out of answering any question or prompt, enter the caret ("^") by itself at the field prompt, as in the example below:

**Figure 67: VA FileMan Prompts—Using the caret ("^") key to exit a prompt**

```
SSN: 000123123// ^
Select PATIENT NAME:
```

In the previous example, the field value 000123123 remains unchanged, but you skip the rest of the questions for this record and return to the "Select..." prompt. If you enter a caret ("^") at the "Select..." prompt, you return to the previous prompt, and so on.

Entering the caret ("^") by itself to exit a given function is a convention used throughout Vista applications.

### 8.11.4 Exiting with the Caret (^ ^)

When the user is doing a lookup to the file, VA FileMan may search many indexes looking for a value that matches the users input. This can be time consuming. If the user wants to get out of the lookup before VA FileMan has completed the search, the user can enter "^^" at any prompt.

### 8.11.5 Mandatory (Required) Fields

In some cases a field is *mandatory*, and you *must* enter a value, if one isn't already there; in other words, a null response (i.e., pressing the **Enter** key without making an entry) is not valid. When you use the caret ("^") or press the **Enter** key without entering data in one or more fields in the entry, your terminal "beeps" and prompts you again to enter information.

If you don't fill in all required fields in a record, it is considered incomplete, and won't be stored unless you fill in the required fields. This protects the database from records containing so little information that they are useless. Enter the requested information.

If you still need to exit before you can provide all required information, you should abort your edit and start over later. You can usually exit out of the data editing sequence by answering any of the prompts with a caret ("^").

## 8.11.6 Spacebar Recall

VA FileMan can recall your most recent response to a prompt. This feature is called Spacebar Recall and employs the Spacebar (<Spacebar>) and **Enter** (<Enter>) keys. For example, if you are editing a particular patient in a Nursing application and then switch to the Order/Entry application to work with the same patient, you can usually retrieve the same patient by pressing the Spacebar and the **Enter** keys at the second application's (Order/Entry) "Select PATIENT NAME:" prompt.

For example:

**Figure 68: VA FileMan Prompts—Using the "Spacebar Recall" functionality**

```
Select PATIENT NAME: <Spacebar><Enter>
FMPATIENT, 24
NAME: FMPATIENT, 24 //
```



**TIP:** You can use Spacebar Recall throughout VA FileMan and the Kernel. Experiment with this feature as a quick way to recall your last response to most prompts.

## 8.11.7 Typical Data Entry Session

So far we have discussed responding to individual prompts. Here is an example of a typical data entry session. The example is characteristic of editing data in many VistA applications:

**Figure 69: VA FileMan Prompts—Example of a typical data entry session**

```

Select Patient (Name or SSN): FMPATIENT, <Enter> 25          01-12-41
000456789    COLLATERAL

Height: 5' 4"// <Enter>
Weight: 150#
Date Weight Taken: TODAY// <Enter> (MAY 17, 1995)
Usual Weight: 145#
Wrist Circumference (cm): <Enter>
Frame Size (SMALL,MEDIUM,LARGE) MED// <Enter>

Calculation of Ideal Body Weight
  H Hamwi
  M Metropolitan 83
  S Spinal Cord Injury
  E Enter Manually

Method: S

Extent of Injury:
  P Paraplegic
  Q Quadriplegic

Select: P

Select Ideal Weight (109-118) 114 lb // <Enter>
Does Patient have an Amputation? NO// <Enter>
Do you wish Anthropometric Assessment? NO// <Enter>

Collecting laboratory data ...

Calculate Energy Requirements Based On:

  1 Actual Body Weight
  2 Ideal Body Weight
  3 Obese Calculation

Choose: 1

Comments:
  No existing text
  Edit? NO// <Enter>

Do you wish to FILE this Assessment Y// <Enter>

```



**NOTE:** The fields in the session listed above take many different responses. Some accept FREE TEXT values, some accept only DATE/TIME, and some accept only NUMERIC input.





**REF:** For more information on the specific types of fields (DATE/TIME, NUMERIC, WORD-PROCESSING, FREE TEXT, etc.) and how to edit them, see Chapter 9, "[Field Type](#)."



## 9 Field Types

So far, you've been introduced to several fundamental VA FileMan conventions, including:

- When the cursor comes to rest in a field, the computer expects you to respond.
- A field serves much the same purpose as a blank on a form.
- Each field has a prompt that identifies your response's subject matter.
- You have a number of tools available to you at field prompts, including the caret ("^") jump, default response, "Replace...With" editor, spacebar recall (<Spacebar><Enter>), and at-sign (@) deletion.
- Some fields have additional restrictions, such as your response's length or format. Enter a single or two question marks (? or ??) to retrieve help on what is an acceptable entry for a particular field.

When you are editing a field, entering a question mark (?) at the field prompt usually provides enough help to infer what kind of field you have reached and to predict what kind of data is acceptable in this field (i.e., DATA TYPE field value).

You do not need to know a lot about these DATA TYPE field values, but a little information can be helpful. In the pages that follow, you'll find examples and brief explanations about each field type (i.e., DATA TYPE field value). In VA FileMan, you will work with many, if not all, of the following DATA TYPE field values:

- [DATE/TIME](#)
- [NUMERIC](#)
- [SET OF CODES](#)
- [FREE TEXT](#)
- [WORD-PROCESSING](#)
- [COMPUTED](#)
- [POINTER TO A FILE](#)
- [VARIABLE-POINTER](#)

In addition, [Subfiles \(Multiples\)](#) are introduced at the end of this chapter.

## 9.1 DATE/TIME Fields

You can use a variety of formats when entering dates. For example, a DATA TYPE field value of DATE/TIME would probably be used to hold a patient's birthdate:

**Figure 70: Field Types—Entering a date at a DATE/TIME field**

DATE OF BIRTH: MAR 3, 1955
----------------------------

With a DATE/TIME field type, as with all field types, entering a question mark retrieves help on acceptable responses. Enter a single question mark (?) at a DATE/TIME field prompt and you'll be given help about what dates are acceptable for the particular field and what precision of date is needed (e.g., year, month, day, or time).

### 9.1.1 Acceptable Formats for Entering Dates

- JULY 20, 1999 *or* July 20, 1999
- 7/20/99
- 20 JUL 99
- 10jul99
- 10 jul 99
- 072099

To simplify entering dates, you can use shortcuts such as **T** for today, **T-1** for yesterday, or **T+1** for tomorrow. Or you can combine **T** with **D** for day, **W** for week, or **M** for month; **T-2D** means two days ago, **T+1W** means today plus one week, and **T+4M** means four months from today.

The year portion of the date can be left off. Normally, VA FileMan assumes the current year. Sometimes, you can input imprecise dates such as "JUL 99" or "1999".



**NOTE:** VA FileMan is Year 2000 (Y2K) compliant.

## 9.1.2 Abbreviations for Dates

[Table 12](#) lists acceptable abbreviations when entering dates:

**Table 12: Field Types—Abbreviations for dates**

Abbreviation	Meaning
TODAY or Today or T or t	Today.
TODAY+1 or T+1 or t+1	Tomorrow.
TODAY-7 or T-7 or t-7	One week ago.
TODAY+3W or T+3W or t+3w	Three weeks hence.

## 9.1.3 Times in DATE/TIME Fields

In some DATE/TIME fields, you can enter a time-of-day along with the date. For example, to indicate 4:00 PM on July 20, 1999, enter the date in one of the formats shown above, followed by an at-sign (@), followed by the time.

For example, you might enter:

**Figure 71: Field Types—Entering a date and time**

APPOINTMENT: 20 JUL 99@4PM

To be totally unambiguous, you can enter time as military time (four or six digits, no colon), hour AM/PM, hour:minute AM/PM, or hour:minute:second AM/PM. If you do omit an AM/PM notation, the following assumptions are made:

- If you enter a single digit for the hour, a time between 6AM and 6PM is used. Thus, **T@330** (or **T@3:30**) means today at 3:30 PM and **T@945** (or **T@9:45**) means today at 9:45 AM.
- If you enter two digits for the hour, the actual hour entered is used (as if military time were being used). Thus, **T@0330** (or **T@03:30**) means today at 3:30 AM.

As with dates, there are supported abbreviations you can use when entering times in DATE/TIME fields. For example, to enter the present moment, you can enter the word **NOW**. To enter an hour from the present moment, enter **NOW+1H**. To enter an hour ago from the present moment, enter **NOW-1H**. You can also combine **NOW** with **D** for day and **M** for month and ' (apostrophe) for minute. You can also enter **MID** for 12 a.m. and **NOON** for 12 p.m.

## 9.1.4 Abbreviations for Times

[Table 13](#) lists acceptable abbreviations when entering time:

**Table 13: Field Types—Abbreviations for times**

Abbreviation	Meaning
NOW+3'	Present time plus three minutes.
NOW+1H	Present time plus one hour.
NOW+3D	Present time plus three days.
NOW+4M	Present time plus four months.
NOON	Today at 12:00 noon.
MID	Today at 24:00 midnight.

## 9.2 NUMERIC Fields

DATA TYPE field values of NUMERIC work very much like [FREE TEXT](#) fields, except that input is restricted to valid numbers. There can also be restrictions as to how small or large a number is allowed, and how many decimal places are allowed. Entering a question mark retrieves help that tells you what responses are acceptable.

For example, a NUMERIC field type would probably be used to store the height of a patient:

**Figure 72: Field Types—Example of a NUMERIC field**

HEIGHT (cm): 196
------------------

## 9.3 SET OF CODES Fields

DATA TYPE field values of SET OF CODES (sometimes referred to as a SET) are preset to accept coded information. The codes are usually only one or two characters long. Each code in a SET represents a word or a series of words. For example, the codes "Y" and "N" often represent the words "YES" and "NO". You can enter the code at this prompt instead of the entire word. If, however, you enter anything other than an acceptable code (or the word it represents), the computer will reject your response.

To see a list of acceptable codes, simply enter a question mark ("?") in response to the prompt.

The following example shows how a SET OF CODES field type is used to store whether or not a patient is a smoker:

**Figure 73: Field Types—Example of a SET OF CODES field**

```
Select PATIENT NAME: FMPATIENT,NINE
SMOKER: ?
  Choose from:
    S      SMOKER
    N      NON-SMOKER
SMOKER: N <Enter>  NON-SMOKER
```

### 9.3.1 Internal vs. External Values for SET OF CODES Fields

In the previous example, the value of the SMOKER field is set to N, which is the code for NON-SMOKER. In this case, N is the internal value of the field (the form in which it is stored in the database). NON-SMOKER is the external value of the field (the form in which it is displayed on screen and in reports).

Every DATA TYPE field value has an internal and external value; in most cases, however, the internal and external values are the same. SET OF CODES field types are an exception.



**NOTE:** Probably, the only place you need to know the distinction between internal and external values is when you print a report and *sort* on a SET OF CODES-valued field. The sort order is based on the internal values (codes) if you sort on a SET OF CODES-valued field.



**REF:** For more information on printing and sorting, see Chapter 4, "[Print](#)."

## 9.4 FREE TEXT Fields

You can enter almost any character from your keyboard in a DATA TYPE field value of FREE TEXT. The computer accepts numbers, letters, and most of the symbols that can be entered. The FREE TEXT field type places a restriction on the number of characters that you can enter. If you enter a question mark ("??") in response to the prompt for a FREE TEXT-valued field, you learn how many characters you are allowed to enter.

For example, a FREE TEXT field type would probably be used to hold a patient's street address:

**Figure 74: Field Types—Example of a FREE TEXT field**

ADDRESS: 235 Begonia Street
-----------------------------

In some places, even though the field is FREE TEXT, checks are applied to make sure what is entered matches a certain format. For example, if you are entering a Social Security Number, which is stored as a DATA TYPE field value of FREE TEXT, *not* NUMERIC, your input would typically be checked to make sure it is nine characters in length and contains all digits:

**Figure 75: Field Types—Example of a FREE TEXT field with validation**

SSN: abcde <Enter> ?? ANSWER MUST BE 9 CHARACTERS IN LENGTH
SSN: 99999 <Enter> ?? ANSWER MUST BE 9 CHARACTERS IN LENGTH
SSN: 33233290 <Enter> ?? ANSWER MUST BE 9 CHARACTERS IN LENGTH
SSN: 000232343
DATE:

## 9.5 WORD-PROCESSING Fields

DATA TYPE field values of WORD-PROCESSING can contain unlimited amounts of text data, and are suitable for things like mail messages, physician notes, and descriptions. Because of their special nature, VA FileMan provides special tools for entering and editing data into this kind of a field.

Two editors for editing WORD-PROCESSING field types are provided with VA FileMan (and described in their own chapters in this manual):

- [Screen Editor](#) (Chapter 14)
- [Line Editor](#) (Chapter 15)



**NOTE:** To set your default editor, see Chapter 13, "[Choice of Word-processing Editors.](#)"





**REF:** This chapter also explains how you can switch your current editor on the fly. For most people, the Screen Editor should be your Preferred Editor for WORD-PROCESSING fields.

When you encounter a WORD-PROCESSING field type, if your default editor is the Screen Editor, a portion of any existing text is displayed, and you'll be prompted "Edit? NO//":

**Figure 76: Field Types—Example of a WORD-PROCESSING field, using the Screen Editor**

```
Select PATIENT NAME: FMPATIENT, 22
NAME: FMPATIENT, 22// <Enter>
SEX: MALE// <Enter>
DATE OF BIRTH: AUG 22, 1948// <Enter>
HISTORY:
Owing to poverty in early youth, patient seems not to
have had proper diet. Since achieving economic success,
his diet has been adequate, but traces of original
deficiency remain.

Edit? NO//
```



**REF:** For a guide to using the Screen Editor, see Chapter [14](#), "[Screen Editor](#)."

When you encounter a WORD-PROCESSING field type, if your default editor is the Line Editor on the other hand, a portion of the text is displayed, and you'll be prompted with "Edit Option:"

**Figure 77: Field Types—Example of a WORD-PROCESSING field, using the Line Editor**

```
Select PATIENT NAME: FMPATIENT, 22
NAME: FMPATIENT, 22// <Enter>
SEX: MALE// <Enter>
DATE OF BIRTH: AUG 22, 1948// <Enter>
HISTORY:
 1>Owing to poverty in early youth, patient seems not to
 2>have had proper diet. Since achieving economic success,
 3>his diet has been adequate, but traces of original
 4>deficiency remain.

EDIT OPTION:
```



**REF:** For more information on the Line Editor, see Chapter [15](#), "[Line Editor](#)."

## 9.6 COMPUTED Fields

DATA TYPE field values of COMPUTED are typically used to output a value computed at run-time in a report. You *cannot* edit the value of a COMPUTED field type.

An example of a COMPUTED field type would be a field that calculated age based on today's date and a patient's DATE OF BIRTH field. Because the field is a COMPUTED field type, it can output a patient's current age based on whatever today's date is. You *cannot* edit the AGE field, but you can use it to print out the current age of the patient.

You are most likely to come across COMPUTED field types when printing with the CAPTIONED PRINT template. Choosing the CAPTIONED OUTPUT template automatically outputs all normal fields containing data for each entry in a report. However, you must choose whether you want COMPUTED fields included in the output as well:

**Figure 78: Field Types—Dialogue to choose a COMPUTED field: Sample user entries at prompts**

```
STANDARD CAPTIONED OUTPUT? Yes// <Enter> (Yes)
Include COMPUTED fields: (N/Y/R/B): NO// ?
```

Enter a code from the list.  
Select one of the following:

N	NO - No record number (IEN), no Computed Fields
Y	Computed Fields
R	Record Number (IEN)
B	BOTH Computed Fields and Record Number (IEN)

**Choose whether to output computed fields.**




**REF:** For more information on CAPTIONED OUTPUT, see Chapter [3](#), "[Inquire](#)," and Chapter [4](#), "[Print](#)."

## 9.7 POINTER TO A FILE Fields

A DATA TYPE field value of POINTER TO A FILE is a field that directs the computer to another file for information. If you are working in the PATIENT file (#200), for example, and you've reached a field that asks for the patient's STATE, the field is probably a POINTER TO A FILE field that "points" to the STATE file (#5). Because of pointers, such commonly used information as states can be stored in a single STATE file (#5). Then, every file (e.g., PATIENT, VENDOR, INSURANCE, etc.) that needs to record a value for STATE can use a POINTER TO A FILE field to the STATE file (#5) to store that information.

For example:

Figure 79: Field Types—Sample of a POINTER TO A FILE field

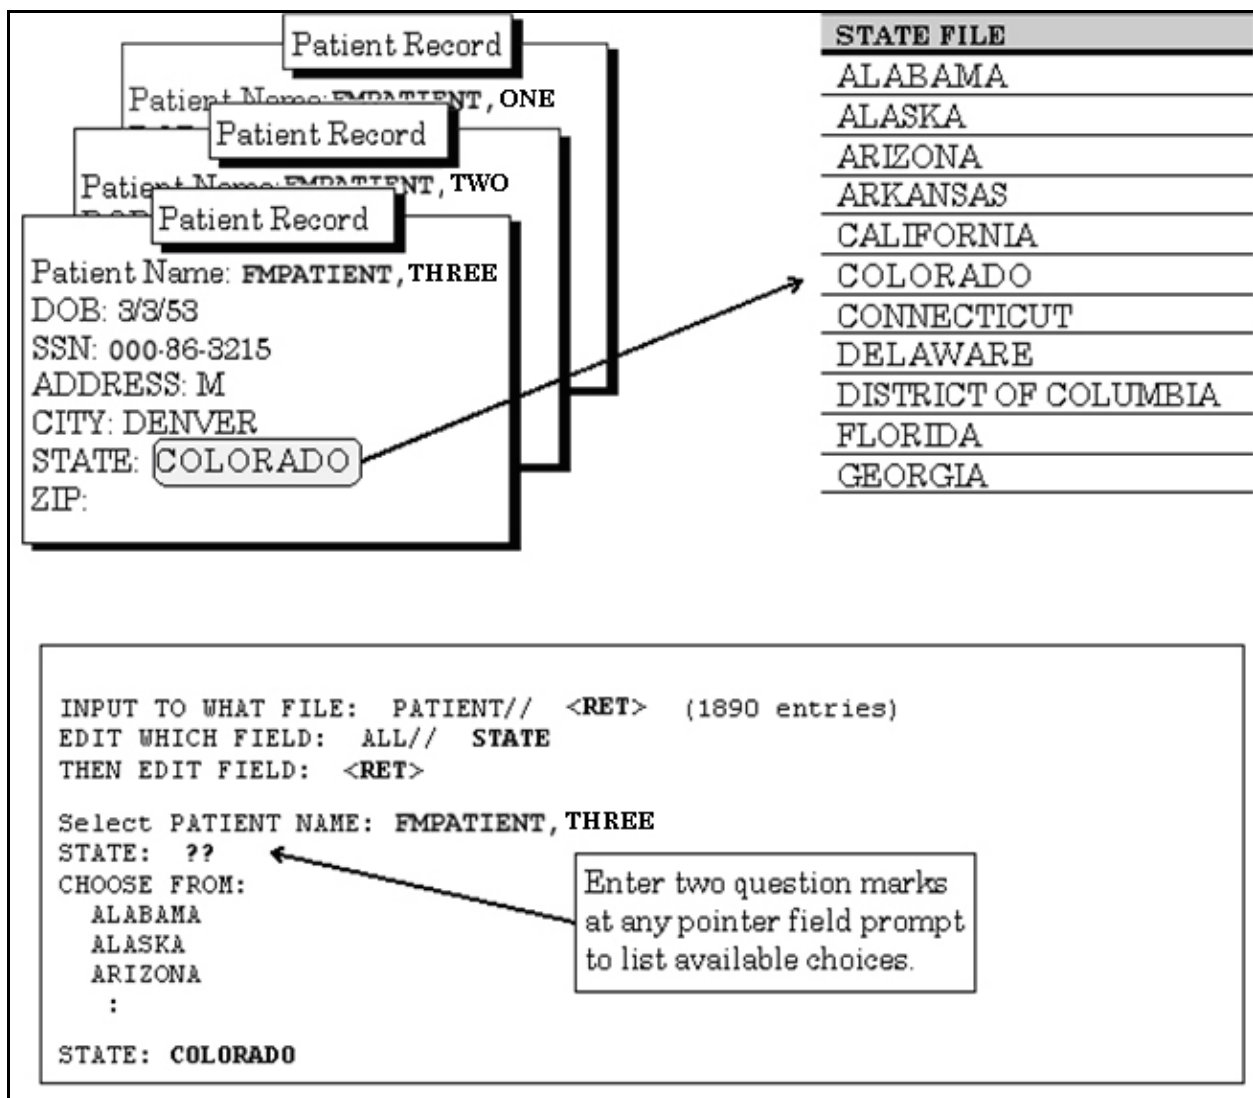

If the choice you need is not listed, you can add that choice by typing it in (provided you have LAYGO access to add the entry). If the entry you enter is not matched, you are asked if you want to add a new


entry. If you answer YES, VA FileMan adds the new entry. For example, if there was a state that did not have an entry in the STATE file (#5), you could add it by entering it at the "STATE:" field prompt.

## 9.8 VARIABLE-POINTER Fields

A DATA TYPE field value of VARIABLE-POINTER is like the regular [POINTER TO A FILE](#) field type, with one difference: the VARIABLE-POINTER DATA TYPE can point to a single record in one of *several* files, whereas the regular POINTER TO A FILE DATA TYPE can point to a single record in only *one* file. The PATIENT file (#200), for example, might use a VARIABLE-POINTER field type to identify a provider; the provider might be a Staff Provider, stored in the PROVIDER file (#6), or an Outside Provider, stored in another file.

For example, if you are working in a PATIENT file (#200) entry, and you need information that explains how to look up a name listed in one of several files. To get help, simply enter a single question mark ("?.") at the "PROVIDER" prompt. Now, on your screen, you will see instructions that explain how to choose a provider from either of the two files being pointed to:

**Figure 80: Field Types—Dialogue showing help for entries in a VARIABLE-POINTER field: Sample user entries at prompts**

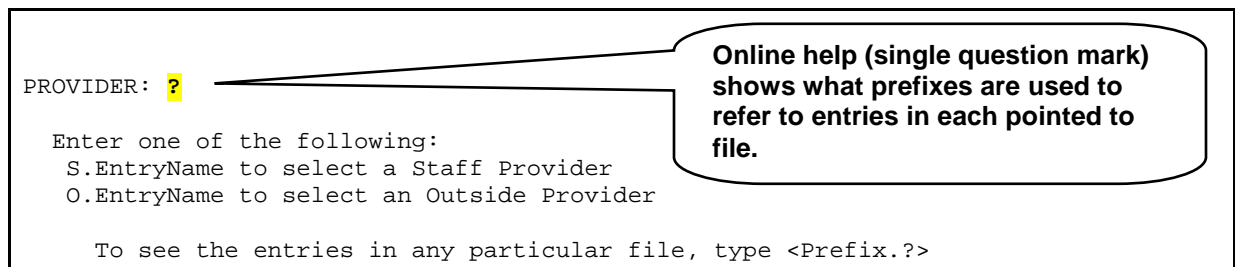

With VARIABLE-POINTER fields, you need to use a PREFIX in addition to an entry name to select an entry. In this example, the online help tells you that to select a Staff Provider, prefix the provider's name with "S.". To select an Outside Provider, prefix the provider's name with "O.".

You can enter a PREFIX and a question mark to get a list of entries in a particular pointed-to file. For example, if you enter "S.?" you can get a list of all Staff Providers. Likewise you can enter "S.FMPROVIDER" to get a list of all Staff Providers whose last names are **FMPROVIDER**. You can also enter "S. **FMPROVIDER,ONE**" to select a Staff Provider named One **Fmprovider**.

For example:

**Figure 81: Field Types—Using the PREFIX and a question mark to get a list of entries in a pointed-to file**

```

PROVIDER: S.?
CHOOSE FROM:
  FMPROVIDER,ONE J.
  FMPROVIDER,TWO J.
  :

```

You can also select an entry in a VARIABLE-POINTER field by just entering a name *without* the PREFIX. In this case, VA FileMan searches each pointed-to file in succession until a match is found.



**NOTE:** This method requires more processing time, since VA FileMan will need to search the various pointed-to files.

For example, to choose a provider without specifying in which file the provider can be found, enter the provider name only:

**Figure 82: Field Types—Searching for an entry in a pointed-to file**

```

PROVIDER: FMPROVIDER,EIGHT M

Searching for a Staff Provider

Searching for a Outside Provider FMPROVIDER,EIGHT M
...OK? YES// <Enter> (YES)

```

You can add an entry to one of the files that is being pointed to by a VARIABLE-POINTER field. To do this, enter the appropriate PREFIX and the new name to add at the field prompt.

For example, to add "FMPROVIDER,EIGHT M" as an Outside Provider (not a Staff Provider), use the appropriate PREFIX when adding the new entry (in this case, "O."). When the requested name is not found, you are asked if you want to add the provider as a new entry. To add the entry, enter YES:

**Figure 83: Field Types—Adding a new entry to a pointed-to file**

```

PROVIDER: O.FMPROVIDER,EIGHT M.
Are you adding 'FMPROVIDER,EIGHT M.' as a new OUTSIDE PROVIDER? No// YES
<Enter> (Yes)
OUTSIDE PROVIDER SEX: MALE
OUTSIDE PROVIDER DATE OF BIRTH: 020235 <Enter> (FEB 02, 1935)
OUTSIDE PROVIDER SSN: 000987321


```

## 9.9 Subfiles (Multiples)

Sometimes, a single field in a record is not enough to hold all the information required. For example, to keep track of the appointment history for a patient, a single field would not be enough. An ordinary field could only hold enough information to record a single appointment. But there needs to be a way to record as many appointments as a patient has had, which could range from none to several hundred. In addition, each appointment might have its own information that needs to be stored, such as date, time, location, doctor, etc.

This situation is handled with what are known as Subfiles (also known as Multiples). Within an individual record, a Subfile (Multiple) can be used to hold this type of information:


**Figure 84: Field Types—Sample Subfile (Multiple) field**

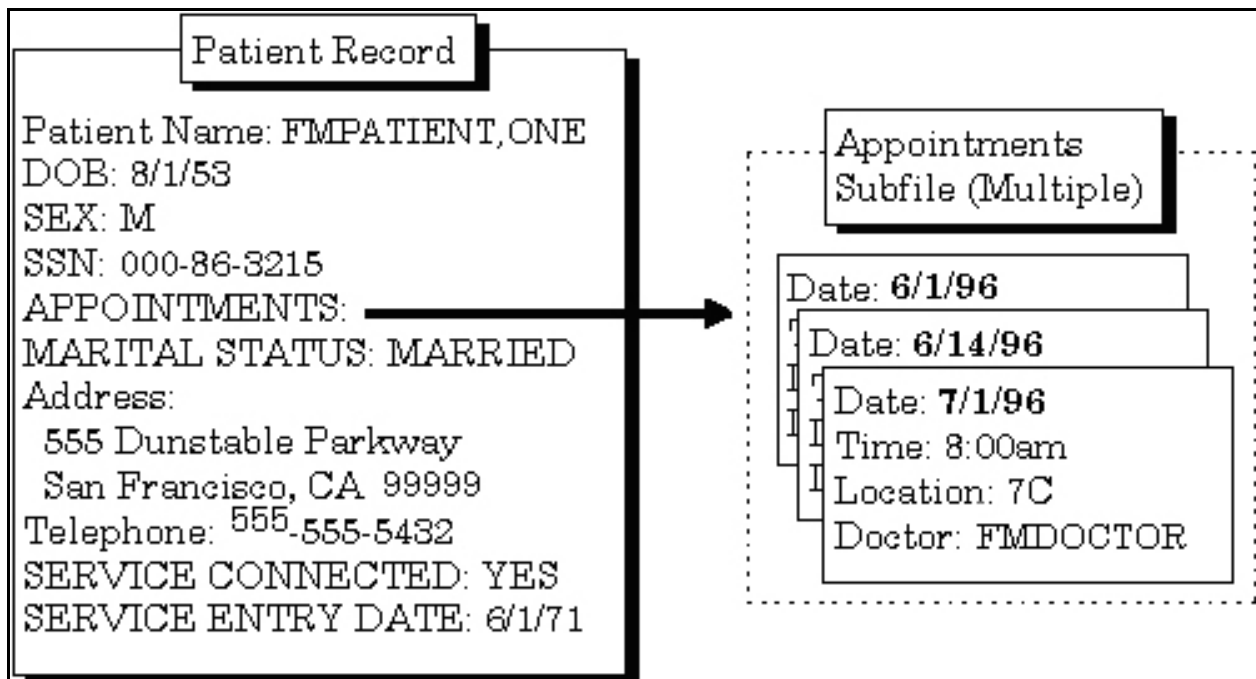

The fields in a Subfile (in this example, DATE, TIME, LOCATION, and DOCTOR) are called Subfields.

The word "Select" is always the first part of the prompt when you encounter a Multiple, to indicate that you are choosing among one of several possible values on file:

**Figure 85: Field Types—Example of a Multiple field prompt**



If, for a given Multiple, more than one entry has already been entered, the most recently created entry is displayed as a default. To see the list of entries already in the Multiple, enter two question marks ("??") at the "Select..." prompt.

Because they are so useful, Subfiles (Multiples) are widely used throughout VistA. They are usually straightforward to use, because their structure as Subfiles mirrors the real-world structure of the information. For example, for a purchase order, the top-level record would be the purchase order. Because a single purchase order needs a place to store as few or as many items as are requested, the purchase order record has a Multiple to record the order items for the purchase order.

Subfiles can themselves contain Subfiles creating additional levels in files.





# 10 Adding and Deleting Records

## 10.1 .01 Field

The ".01 field" is the most important field in a file. For the records in a file, it usually identifies the record more than any other single field; for example, the .01 field of the PATIENT file is NAME. The .01 field of a WARD file might be WARD NAME.


Usually in an edit dialogue, the .01 field is the field you are prompted for when you choose a record to edit. Typically it's also the first field you actually edit once you've chosen the record.

The .01 field plays a role in both adding and deleting entries in a file. To *add* an entry to a file, you usually enter a new value at the .01 field's prompt. To *delete* an entry to a file, you usually enter an at-sign (@) in the entry's .01 field.

## 10.2 How to Add a Record

As you may recall from the "Introduction" chapter, an entry is a complete record in a file. To *add* a new entry to a file, enter the name of the new entry at the "Select..." prompt where you ordinarily choose which record in the file to edit:

**Figure 86: Records—Dialogue to add a record: Sample user entries at prompts**

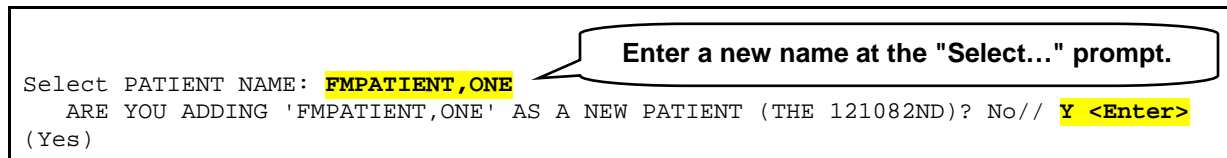

This is the prompt for the record's .01 field (see above). If you enter a name that does not exist in the file, you are prompted "Are you adding 'XXXXXXXX' as a new 'ENTRY'?", where "XXXXXXXX" represents the field value and "ENTRY" represents the field or file name. If LAYGO is allowed and you answer YES to this prompt, VA FileMan will add the new entry to the file. You then go on to edit other fields for the new entry.


If a file has one or more data Keys defined (i.e., fields or combinations of fields that uniquely identify a record), then those fields must also be filled in before the new entry will be added. There must *not* be any other records on the file that have the same values in all of those fields.

Finally, there may be a set of required fields (identifiers) for the new entry; these must be filled in with values for the new entry to be saved.

### 10.3 Adding a Duplicate Record (Use Quotes)

What if there is already a "FMPATIENT,ONE" in the PATIENT file, and you need to add a second entry with the same name "FMPATIENT,ONE"? Simply entering that name at the "Select..." prompt selects the existing entry. To create a *second* FMPATIENT,ONE entry, even though one with that name *already* exists, enter the entry name you want to add, but with *quotation marks* around it:

**Figure 87: Records—Dialogue to add a duplicate record: Sample user entries at prompts**

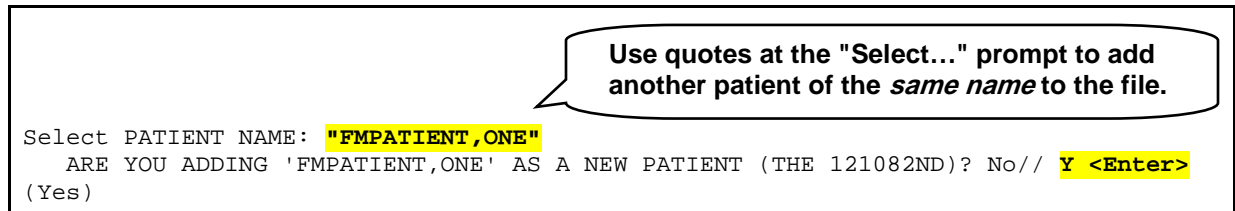


**REF:** See the "[Adding Records at a POINTER TO A FILE Field](#)" section for instructions on adding entries with the same name to pointed-to files from POINTER TO A FILE DATA TYPE fields.

If a record has a data Key defined (i.e., fields or combinations of fields that uniquely identify a record), and if the data Key contains more than one field, then it would be possible to add a second FMPATIENT,ONE without using quotes. Suppose the Key fields were the NAME and the DATE OF BIRTH. Then the user would be prompted for both NAME and DATE OF BIRTH, and assuming that the DATE OF BIRTH of the second FMPATIENT,ONE were different from the existing record, VA FileMan would allow the user to add the new FMPATIENT,ONE *without* enclosing the name in quotes.

### 10.4 How to Delete a Record

To delete an existing record in a file, enter an at-sign (@) in the record's .01 field. This tells VA FileMan to delete the record. In all deletions, you're asked to confirm the deletion before VA FileMan goes ahead and deletes the record. Here is an example of deleting a record in a file:

**Figure 88: Records—Dialogue to delete a record: Sample user entries at prompts**

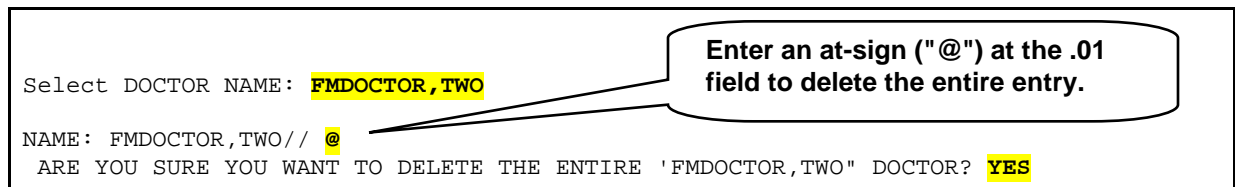

## 10.5 Repointing When Deleting Records

What if a record in another file points to the record you're deleting?

If you delete a record that is pointed to from another file, this would leave a dangling pointer that points to a non-existent entry. To prevent this, if the record you delete could be pointed to from another file, you are given the opportunity to either delete any pointers to the deleted record, or change them all to point to another record.

For example, an entry in the PATIENT file may have a field that points to a doctor in the PROVIDER file. If you delete the doctor from the PROVIDER file, you should say what should happen to any entries in other files, including PATIENT, that point to this doctor.

In the example below, when we delete the FMDOCTOR,TWELVE record, the system re-points any entries that had been pointing to FMDOCTOR,TWELVE to point to FMDOCTOR,EIGHT.

**Figure 89: Records—Dialogue to delete a record and re-point to a different record: Sample user entries at prompts**

```

Select DOCTOR NAME: FMDOCTOR,TWELVE

NAME: FMDOCTOR,TWELVE// @
ARE YOU SURE YOU WANT TO DELETE THE ENTIRE 'FMDOCTOR,TWELVE' DOCTOR? YES

SINCE THE DELETED ENTRY MAY HAVE BEEN 'POINTED TO' BY ENTRIES IN THE 'PATIENT'
FILE,ETC., DO YOU WANT THOSE POINTERS UPDATED 9WHICH COULD TAKE QUITE A WHILE)?
NO// Y <Enter> (YES)

WHICH DO YOU WANT TO DO?
1) DELETE ALL SUCH POINTERS
2) CHANGE ALL SUCH POINTERS TO POINT TO A DIFFERENT 'DOCTOR' ENTRY
CHOOSE 1) OR 2): 2

THEN PLEASE INDICATE WHICH ENTRY SHOULD BE POINTED TO

Select DOCTOR NAME: FMDOCTOR,EIGHT
-OK? YES// Y <Enter> (YES)
(RE-POINTING WILL OCCUR WHEN YOU LEAVE ENTER/EDIT OPTION)

```

**Choose to update pointers.**

**In this case, point them all to a different entry.**

**Change FMDOCTOR,TWELVE entries to point to FMDOCTOR,EIGHT.**

## Adding and Deleting Records

When you leave the Enter or Edit File Entries option, the updating is done. A report is generated listing all changed entries; you need to specify on what device this report should be listed:


**Figure 90. Records—Dialogue showing a report of changed entries: Sample report**

```
...EXCUSE ME, LET ME PUT YOU ON 'HOLD' FOR A SECOND...
DEVICE: HOME// <Enter> SYSTEM

PATIENT ENTRIES WHOSE 'ATTENDING PHYSICIAN' POINTERS HAVE BEEN CHANGED
-----

FMPATIENT, TWENTY
FMPATIENT, ONE
FMPATIENT, ELEVEN
FMPATIENT, SEVEN

Select OPTION:
```

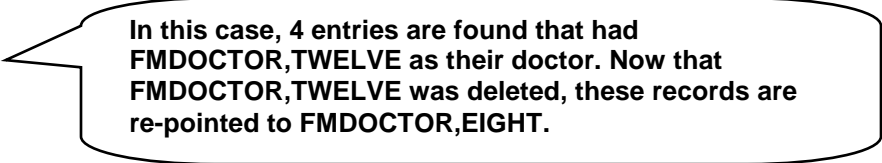

In this case, 4 entries are found that had FMDOCTOR, TWELVE as their doctor. Now that FMDOCTOR, TWELVE was deleted, these records are re-pointed to FMDOCTOR, EIGHT.

## 10.6 Adding Records to a POINTER TO A FILE Field

Suppose you're editing a POINTER TO A FILE-type field. This lets you choose an entry from another file to point to. If you have LAYGO access to the pointed-to file, you can also *add* new entries to it when editing the POINTER TO A FILE field.

For example, suppose you are editing the TITLE field in the NEW PERSON file, which is a POINTER TO A FILE type field that "points" to the TITLE file. What if you want to choose a TITLE that's not already in the TITLE file? You can add it as in the example below:

**Figure 91: Records—Dialogue to add a new entry to a pointed-to file: Sample user entries at prompts**

```

NAME: FMUSER,ONE// <Enter>
.
.
.
TITLE: ??
      This is the title for the new person.

Choose from:
ACCOUNTANT
ACCOUNTANT/TRAINEE
ACCOUNTING TECHNICIAN
ACCOUNTING TECHNICIAN (OA)
ACCOUNTS MAINT CLERK (OA)
ACCOUNTS RECEIVABLE ASSISTANT
ACOS/AMBULATORY CARE
ADDICTION THERAPIST
ADJUDICATOR
ADMIN OFFICER
ADMIN SUPPORT ASSISTANT
ADMINISTRATIVE ASSISTANT
ADMINISTRATIVE INTERN
ADMINISTRATIVE LIBRARIAN
ADMINISTRATIVE OFFICER
AIR COND EQUIP MECHANIC
AIR COND EQUIP MECHANIC/HLPR
AIR COND EQUIP MECHANIC/LDR
ANESTHESIOLOGIST
      ^
      You may enter a new TITLE, if you wish
      ANSWER MUST BE 3-30 CHARACTERS IN LENGTH

TITLE: OIT STAFF
Are you adding 'OIT STAFF' as a new TITLE (the 750TH)? No// Y <Enter> (Yes)
TITLE OCCUPATION CODE: 2210
SSN: 111111659// <Enter>
.
.
.
  
```

**Press the <Enter> key until you reach the field in question. Entering "??" at a pointer field provides a list of entries in the pointed-to file from which to choose.**

**This is a list of existing entries in the TITLE file. Press <Enter> to see the whole list or a caret ("^") to exist the list.**

**Add a new entry by typing it in and confirming its addition to the list.**

In this example, after adding OIT STAFF as a new entry, if you go back to the TITLE field and enter two question marks ("??") again, OIT STAFF would be one of the choices listed for TITLE.

## 10.6.1 Adding Duplicate-Named Entries

You can force an entry to be added to the pointed-to file even if an entry with the same value already exists in the pointed-to file. To add a duplicate-named entry, surround the value to be added with *one* set of quotation marks, like this:

**Figure 92: Records—Adding a duplicate-named entry to a pointed-to file**

```
POINTER FIELD: "FORCED NEW ENTRY"
```

If the POINTER TO A FILE field that you are editing happens to be the NAME (#.01) field of the current file, you can add entries to both the current file and to the pointed-to file by surrounding your value with *two* sets of quotation marks as follows:

**Figure 93: Records—Adding an entry to both the current file and to a pointed-to file**

```
POINTER FIELD (.01): ""FORCED NEW ENTRY""
```

## 10.7 Adding and Deleting from Multiples

Some special considerations apply when you are editing Multiple-valued fields. One example of a Multiple field is the DIAGNOSIS field in the PATIENT file. As you may recall from Chapter 9, "Field Types," a Multiple is a field in a record that can store multiple subrecords. In this case, VA FileMan must be able to store multiple diagnosis entries for a single patient, and it uses a Multiple field to do so:

**Figure 94: Records—Dialogue showing entries to a Multiple field: Sample user entries at prompts**

```

Select PATIENT NAME: FMPATIENT,NINE

NSAME: FMPATIENT,NINE // <Enter>
PATIENT DATE OF BIRTH: 4/19/49// <Enter>
Select DIAGNOSIS: ??
  1  ANGINA PECTORIS
  2  PNEUMONIA

ANSWER with DIAGNOSIS
  You may enter a new DIAGNOSIS, if you wish

Select DIAGNOSIS: ANGINA PECCRORIS
DIAGNOSIS: ANGINA PECTORIS// <Enter>
AGE AT ONSET: 25
HISTORY:
1) <Enter>
EDIT OPTION: <Enter>

Select DIAGNOSIS: <Enter>

Select PATIENT NAME:

```

**At the DIAGNOSIS Multiple's "Select..." prompt, enter two question marks to see what entries are currently in the multiple.**

**"Select" is used before the Multiple field name, indicating you should choose one value from among several possible values.**

**After you edit one DIAGNOSIS Multiple entry, you are given the chance to edit another.**

Multiples have .01 fields, just like records at the top level of a file. Thus, just as with records at the top level of a file, you select entries in the Multiple at the Multiple's "Select..." prompt. You can also add a new entry by typing it in at the Multiple's "Select..." prompt. You can delete an entry in a Multiple by entering an at-sign (@) in the existing entry's .01 field.

Enter a single question mark (?) at a Multiple's "Select..." prompt to retrieve brief help for the field; enter two question marks (??) to choose from the list of entries in the Multiple.

## 10.8 Enter or Edit File Entries Option

In most cases you enter and edit data through application programs. Applications are pre-programmed to allow you to edit specific files, and often only a subset of the fields in any given file. The application shields you from many aspects of editing the file data, such as even knowing the name of the file you are working with. Usually, this information is already chosen for you by the application.

You can also edit data in a file directly, however, using VA FileMan's Enter or Edit File Entries option. Your ability to edit data in any given file depends on:

- Whether you have the Enter or Edit File Entries option on your menu.
- Whether you have access to edit the file in question.

The steps to use the Enter or Edit File Entries option are:

1. At the "INPUT TO WHAT FILE:" prompt, choose which file to edit. To see what files you have access to, you can enter two question marks (??) at this prompt:

**Figure 95: Records—Choosing a file to edit**

```

INPUT TO WHAT FILE: ??
Choose from:
  335235          FMUSER'S DATA          (7 entries)
  335238          PROJECTS                (3 entries)
  335668          WARD HISTORY            (178 entries)

INPUT TO WHAT FILE: PROJECTS
    
```

2. At the "EDIT WHICH FIELD:" prompt, choose what fields to edit for each file entry. The easiest response is to just accept the default of ALL fields by pressing the **Enter** key:

**Figure 96: Records—Choosing the file fields to edit**

```

EDIT WHICH FIELD: ALL//
    
```

If, however, you want to edit only *certain fields* (not *all* fields), answer the "EDIT WHICH FIELD:" prompt with the name (or number) of the **FIRST** field you want to edit. You can then enter additional fields to edit (when you are done, press the **Enter** key at the "THEN EDIT FIELD:" prompt). For a list of fields you can edit, enter two question marks at any "EDIT FIELD:" prompt.



**Figure 97: Records—Choosing specific file fields to edit**

```

EDIT WHICH FIELD: ALL// NAME
THEN EDIT FIELD: PROJECT SHORT DESCRIPTION
THEN EDIT FIELD: PROJECT ISSUE <Enter> (multiple)
      EDIT WHICH PROJECT ISSUE SUB-FIELD: ALL// <Enter>
THEN EDIT FIELD: <Enter>
Select PROJECTS NAME:

```

3. You can now edit entries. Choose each entry to edit at the "Select...NAME:" prompt. Each time you choose an entry, you step through each field you specified in [Step 2](#) above. When you are done with editing an entry, you are prompted for another entry to edit at the "Select..." prompt. When you are done editing entries, just press the **Enter** key.

Here is an example of a typical data entry session using the Enter or Edit File Entries option:

**Figure 98: Records—Dialogue using the Enter or Edit File Entries option: Sample user entries at prompts**

```

Select VA FileMan Option: ENTER <Enter> or Edit File Entries

INPUT TO WHAT FILE: PROJECTS// <Enter> (500 entries)
EDIT WHICH FIELD: ALL// NAME
  1 NAME
  2 NAME COMPONENTS
CHOOSE 1-2: 1 <Enter> NAME
THEN EDIT FIELD: PROJECT SHORT DESCRIPTION
THEN EDIT FIELD: PROJECT ISSUE <Enter> (multiple)
  EDIT WHICH PROJECT ISSUE SUB-FIELD ALL// <Enter>
THEN EDIT FIELD: <Enter>

Select PROJECTS NAME: ??

Choose from:
  BUILDING 9 NETWORK CABLING
  WARD 7 CONSTRUCTION
  WARD 9 CONSTRUCTION

Select PROJECTS NAME: WARD 9 CONSTRUCTION
NAME: WARD 9 CONSTRUCTION// <Enter>
PROJECT SHORT DESCRIPTION: REFURBISH WARD
Select PROJECT ISSUE: ??

Choose from:
  ASBESTOS REMOVAL
  CEILING TILES
  DATA cabling
  DRYWALL
  ELECTRICAL WIRING
  '^' TO STOP: ^

Select PROJECT ISSUE: DRYWALL
  ...OK? YES// <Enter> (Yes)

PROJECT ISSUES: DRYWALL// <Enter>
Date Started: 3/3/96 <Enter> (MAR 03, 1996)
Status: In Progress// <Enter>
Description:
  No existing text
  Edit? NO// <Enter>

Select PROJECT ISSUE: <Enter>

Select PROJECTS NAME: <Enter>

Select VA FileMan Option:
  
```

# 11 ScreenMan

ScreenMan is VA FileMan's *screen-oriented* data entry tool. It is an alternative to the Scrolling Mode approach. With ScreenMan, data is entered in *forms*. Each form field occupies a fixed position on the screen (instead of scrolling off!). You can see many data fields at once, and use simple key combinations to edit data and move from field to field on a screen. You can also move from one screen to another like turning through the pages of a book.

## 11.1 Scrolling Mode Editing vs. Screen Mode Editing

### 11.1.1 Similarities

- You can change a field's value by entering a different value or delete a field's value by entering the at-sign (@).
- You can enter one or two question marks to call up a list of acceptable responses and other help. If you enter a value deemed unacceptable, ScreenMan displays a message explaining what type of information should be entered.
- If you wish, you can jump from the current field to any other field in your current screen. With your cursor resting at any field's prompt, simply enter a caret ("^") and then the name of the field.

### 11.1.2 Differences

- In Scrolling Mode, you *must* enter and store your response to one field prompt before you can continue to the next field. In Screen Mode, you can move the cursor from field prompt to field prompt without entering or storing any responses.
- In Scrolling Mode, your data values or responses to field prompts are stored one at a time, as you move from prompt to prompt. In Screen Mode, your responses to most prompts are stored only when you exit the form.



**REF:** For a detailed explanation on *creating* ScreenMan forms, see the *ScreenMan Tutorial for Developers Manual*—available in both Adobe Acrobat PDF and HTML formats on the VA FileMan Home Page at: <http://www.va.gov/vdl/application.asp?appid=5>

## 11.2 ScreenMan Screen

Figure 99: ScreenMan—Sample screen component parts and field values

The screenshot shows a terminal window titled "Edit an Existing User" on "Page 1 of 5". The screen displays user information for "FMUSER, ONE" with various fields like TITLE, SSN, and DEGREE. Some fields are underlined, and one is highlighted in reverse video. A command area at the bottom contains navigation options like "Exit", "Save", "Next Page", and "Refresh". Callouts explain that underlined captions indicate required fields, reverse video highlights the current field, and the command area is used for navigation and help.

```

Edit an Existing User
NAME: FMUSER, ONE
NAME... FMUSER, ONE
TITLE: OIT STAFF
SSN: 000111659
DEGREE:
DISUSER:
Termination Reason:
INITIAL: OF
NICK NAME: One
DOB:
MAIL CODE:
TERMINATION DATE:
PRIMARY MENU OPTION: EVE
Select SECONDARY MENU OPTIONS: TIU MED MANAGEMENT
Want to edit ACCESS CODE (Y/N): FILE MANAGER ACCESS CODE: @
Want to edit VERIFY CODE (Y/N):
Select DIVISION:
SERVICE/SECTION: INFORMATION RESOURCES MANAGEME
Exit Save Next Page Refresh
Enter a command or '^' followed by a caption to jump to a specific field.
COMMAND: Press <PF1>H for help Insert
  
```

**Required Fields are underlined.**

**Current field (reverse video).**

**Command Area: This is where ScreenMan displays messages, help text, and interactive dialogue. For example, if you enter 1 or 2 question marks in a field, help is displayed in this area.**

**Command Line: Here you can issue the commands "Exit," "Save," "Close," "Next Page," and "Refresh."**

**Help Reminder: This reminds the user that to get help at any time, press <PF1>H.**

Fields are usually composed of a *data element* and a *caption*. ScreenMan displays data elements in high intensity (boldface) and other text in regular intensity. Text that identifies a data element is called a *caption* and is usually followed by a colon (:). A caption and its associated data element are together called a *field*. Captions of *required* fields are underlined; to save any changes you make on the form, required fields *must* contain data.



**NOTE:** ScreenMan highlights captions for required fields with an underline. However, on some terminals or depending on your terminal emulator software and your personal preferences, the form of the highlight can vary (e.g., some emulators will highlight required fields in a different color, with an underline, or both).

Specifically, on Qume 102 and Wyse 75 terminals, captions for required fields display in

boldface, not underlined. Also, the edit window is displayed with an underline extending from the last character of the existing data to the right edge of the edit window.

## 11.3 Cursor Movement (Navigation Keystrokes)

### 11.3.1 How to Navigate Between Fields

There are a number of ways you can move the cursor from field to field on a form (i.e., navigate). This is to provide you with as much flexibility as possible so that you can work quickly and efficiently with forms.

You can use the keystrokes listed in [Table 14](#) to move the cursor to various fields located on a ScreenMan form:

**Table 14: ScreenMan—Keystrokes to navigate between fields in a ScreenMan form**

To	Press
Move to the next field (to right or below).	<Tab>
Move to the previous field (to left or above).	<PF4>
Move to the field above.	<ArrowUp>
Move to the field below.	<ArrowDown>
Move to the next field in the pre-defined edit sequence.	<Enter>
Edit a WORD-PROCESSING field.	At field, press <Enter>
Select a subrecord in a Multiple.	At field, press <Enter>
Move to the next block on current page.	<PF1><PF4>
Jump to a specific field.	^ followed by Caption of field and <Enter>
Jump to the Command Line.	^<Enter>

## 11.3.2 How to Navigate Between Pages

Many ScreenMan forms have more than one *page* (i.e., there are additional screens besides the first one on the form) with additional fields that you can edit.

You can use the keystrokes listed in [Table 15](#) to move between pages on a ScreenMan form:

**Table 15: ScreenMan—Keystrokes to navigate between pages in a ScreenMan form**

To	Press
Move to next page	<PF1><ArrowDown> or <PageDown>
Move to previous page	<PF1><ArrowUp> or <PageUp>
Move to a page you specify	<PF1>P

## 11.3.3 Saving and Exiting

To SAVE or EXIT the form, you need to reach ScreenMan's command line. It's reachable from any ScreenMan screen. To reach the command line, do any one of the following:

- Enter a caret ("^") at any field prompt.
- Press <Enter>, <Tab>, or <PF4> to move from field to field until you reach the command line.
- Press <ArrowDown> or <ArrowUp> to move the cursor from field to field downwards or upwards, until you reach the command line.

Then you can enter SAVE or EXIT at the [command line](#).

## 11.3.4 Command Line Options (SAVE, EXIT, etc.)

From the Command Line, you can issue the commands to perform various functions while in ScreenMan. You can also use a shortcut key sequence to perform the same function without having to enter it on the command line.

### 11.3.4.1 Shortcut Keys

[Table 16](#) lists the command line options and the corresponding shortcut responses while in a ScreenMan form:

**Table 16: ScreenMan—Command line options and shortcut keystrokes in a ScreenMan form**

Command Line Option	Shortcut	Description
EXIT	<PF1>E	Exits the form. If you have made any changes, ScreenMan asks if you want to save them before exiting.
SAVE	<PF1>S	Saves your changes without exiting the form.
REFRESH	<PF1>R	Repaints the page(s) on the screen, in case, for some reason, the information displayed on the screen has become corrupted.
NEXT PAGE	<PF1><ArrowDown> or <PageDown>	(Available only on multi-page forms.) Goes to the next page of the form.
CLOSE	<PF1>C	(Available only on "popup" pages.) Closes the current page and returns you to the parent page.
(none)	<PF1>Q	Quit the form, discarding changes.



**NOTE:** On a "popup" page, your only Command Line options are CLOSE and REFRESH.

## 11.4 Editing

### 11.4.1 How to Edit Fields

The following charts list the key sequences for ScreenMan's Field Editor, the editor that allows you to edit data fields on a ScreenMan Form.

#### 11.4.1.1 Cursor Movement

[Table 17](#) lists the keystrokes you use to move the cursor while in a ScreenMan form:

**Table 17: ScreenMan—Keystrokes to move the cursor in a ScreenMan form**

To Move	Press
Right one character	<ArrowRight>
Left one character	<ArrowLeft>
Right one word	<Ctrl-L> or <PF1><Spacebar>
Left one word	<Ctrl-J>
Right edge of window	<PF1><ArrowRight>
Left edge of window	<PF1><ArrowLeft>
End of field	<PF1><PF1><ArrowRight>
Beginning of field	<PF1><PF1><ArrowLeft>



### 11.4.1.2 Deletion

[Table 18](#) lists the keystrokes you use to delete characters while in a ScreenMan form:

**Table 18: ScreenMan—Keystrokes to delete characters in a ScreenMan form**

To Delete	Press
Character under cursor	<PF2> or <Delete> or <Remove>
Character left of cursor	<Backspace>
From cursor to end of word	<Ctrl-W>
From cursor to end of field	<PF1><PF2>
Delete entire field / Restore last edit / Restore default	<PF1>D or <Ctrl-U>

### 11.4.1.3 Modes

[Table 19](#) lists the keystrokes you use to switch modes while in a ScreenMan form:

**Table 19: ScreenMan—Keystrokes to switch modes in a ScreenMan form**

To Switch to	Press
Insert/Replace mode	<PF3>
Zoom editor (edit long fields)	<PF1>Z

If the first key you press upon navigating to a field is a printable character, the Field Editor assumes you want to replace any existing default and replaces the entire field with the character just typed. To just edit the existing field value, first press an editing key, such as <ArrowLeft> or <ArrowRight>.

## 11.4.2 Long Fields (and the Zoom Editor)

The actual contents of a field being edited can extend beyond the confines of the visible field on a ScreenMan form. As you use the <ArrowLeft> and <ArrowRight> keys at the left and right edges of the window, you can scroll left or right to display one end or the other of the field.

To see and edit the entire contents of a long field at once, press <PF1>Z to invoke the Zoom Editor. This opens an area up at the bottom of the screen, providing you as much space as you need to both see and edit the entire long field.

## 11.4.3 WORD-PROCESSING Fields

To edit or display a WORD-PROCESSING field, press the **Enter** key at the WORD-PROCESSING field. This clears the screen and passes control to your Preferred Editor to edit the field. If you do not have a Preferred Editor, the Screen Editor is used. When you exit the editor, you return to the ScreenMan screen.



**REF:** To set your Preferred Editor, see Chapter [13](#), "[Choice of Word-processing Editors.](#)"



**NOTE:** If the WORD-PROCESSING field is uneditable or appears in a display block, you can view the contents of the field with an editor. However, if you edit the text, your changes will *not* be filed in the permanent database, even if you tell the editor to save the changes.

## 11.4.4 Multiples

You can easily spot a Multiple field. It usually begins with the word "Select" (as in "Select ADDRESS" or "Select ADMISSION DATE"). There are two ways Multiples can be displayed on a form:

- The Multiple is linked to a "popup" subpage, which contains the subfields of the Multiple.
- The Multiple is displayed in a repeating block -- several subrecords can be displayed simultaneously on a page, much like a scrolling list.

### 11.4.4.1 Multiples Linked to "Popup" Subpages

A Multiple field can appear on a page and be linked to a regular or "popup" subpage. When you navigate to the Multiple field, select a subrecord, and press the **Enter** key, you are taken to the subpage, which contains the fields within the Multiple.

In [Figure 100](#), the Multiple is the field with the caption "Select SECONDARY MENU OPTIONS:". When you enter a secondary menu option at this field, you are taken into a "popup" subpage, where you can edit the fields for that particular subrecord:

**Figure 100: ScreenMan—A "popup" subpage for a Multiple: Sample component parts and field values**

```

                                     Edit an Existing User
NAME: FMUSER,ONE                                     Page 1 of 5
-----
NAME...  FMUSER,ONE                               INITIAL: OF
TITLE:  OIT STAFF                                 NICK NAME: One
SSN:    000111659                                DOB:
DEGREE:                                     MAIL CODE:
DISUSER:                                     TERMINATION DATE:
Termination Reason:

      R,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,T
Select .                                     SECONDARY MENU OPTIONS .
Want to .                                     .
Want to . SECONDARY MENU OPTIONS: XU CHECKSUM REPORT .
      .                                     SYNONYM: .
      .                                     .
      F,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,G
-----
Close   Refresh
Enter a command or '^' fo
COMMAND: Close                                     Press <PF1>H for help
Insert
```

**Popup subpage when an entry was made at the "Select SECONDARY MENU OPTIONS" prompt. The user can edit the selected entry for the multiple in this popup subpage.**

### 11.4.4.2 Exiting a Subpage

While in a subpage, your only Command Line options are [CLOSE](#) and [REFRESH](#). You cannot [EXIT](#), [Quit](#), or [SAVE](#) until you return to the parent page. You can return to the parent page by pressing **<PF1>C** or issuing the [CLOSE](#) command at the Command Line. From there, you can select another subrecord to edit or navigate to another field.

### 11.4.4.3 Deleting an Entry in a Multiple

If a default subrecord is displayed at a Multiple field, you can delete that subrecord by entering an at-sign (@) at the Multiple field. You can also delete a specific subrecord by selecting that subrecord and going into the subpage, and entering an at-sign (@) at the .01 field.



**NOTE:** Deletions of subrecords are immediate and permanent even if you quit the form without saving, deleted subrecords are not restored to the database.

### 11.4.4.4 Adding a New Entry to a Multiple

You can respond to a Multiple field in one of two ways:

- Accept the field's default answer.
- Enter a new item: an employee's second address, for example, or another admission date for the same patient.

Sometimes, you may need to enter a new entry in a Multiple. To do this, enter the new value for the new entry in the Multiple's .01 field. If you have LAYGO access (permission to add new entries), you'll be asked if you want to add the entry to the Multiple. To change your mind about adding the item, enter NO. If you enter YES, though, ScreenMan opens either a "popup" page or a new window, allowing you to enter additional information for the new Multiple entry.

### 11.4.4.5 Multiples in Repeating Blocks

Subrecords in a Multiple can be displayed in another way. Rather than just the name of single entry in the Multiple being displayed on the current page, you may also see Multiples where several subrecords are displayed simultaneously on the page. Each subrecord occupies one line on the screen, in a scrolling list. This is called a repeating block. Instead of leading to a "popup" page, you are able to edit all visible fields in the Multiple as they are displayed.

For example:

**Figure 101: ScreenMan—Dialogue showing a repeating block in a Multiple: Sample ScreenMan fields and field values**

Employee Profile Page 1 of 2

NAME: FMUSER, ONE

NICK NAME: ONE

TITLE: ARTIFICAIL INTELLIGENCE THEORETICIAN

POSITION DESCRIPTION (WP):

DATE OF EMPLOYMENT	EMPLOYER	YEARS WORKED
+ FEB 1, 1967	TEST EMPLOYER B	2
MAR 1, 1969	TEST EMPLOYER C	3
APR 1, 1972	TEST EMPLOYER D	4
MAY 1, 1976	TEST EMPLOYER E	5

Exit Save Next Page Refresh

Plus sign followed by a caption to jump to a specific field.

COMMAND: Close Press <PF1>H for help **Insert**

You can always navigate to a blank line below the end of the list. At this blank line, you can add a new subrecord if LAYGO is allowed, or jump to an existing subrecord by entering its name.

## 11.4.5 Navigational Keys for Repeating Blocks

[Table 20](#) lists the keystrokes you use to navigate while in a Repeating Block in a ScreenMan form:

**Table 20: ScreenMan—Keystrokes to navigate repeating blocks in a ScreenMan form**

To	Press
Scroll through the list	<ArrowUp> and <ArrowDown>
Page down through the list	<PF1><ArrowDown> or <PageDown>
Page up through the list	<PF1><ArrowUp> or <PageUp>
Jump to the blank line at end of list	^<Enter> in a non-blank line
Jump to the Command line	^<Enter> at the end of the list

## 11.5 Details

### 11.5.1 How to File Edits

In general, the database is unaffected while you edit a record in a ScreenMan form. Changes are filed only at your request, when you [SAVE](#) or [EXIT](#).

Before filing, ScreenMan checks that:

- Required fields on all pages that can be accessed via the next and previous page links have values, even if you have not accessed those pages during the editing session.
- If you have accessed any subpages, required fields in those subpages must also have values.

If any required field is empty, you cannot file any data changes. When you attempt to file, ScreenMan displays a list of those fields that require values.

The <PF1>Q key sequence allows you to [quit](#) the form without saving changes. Filing does not occur if you time out.



**NOTE:** There is one situation in which a change to the database is made immediately: when you delete an entry from a file or subfile. When you attempt to delete an entry, ScreenMan issues a

warning that deletions are immediate and permanent. Even if you [quit](#) the form without [saving](#) your changes, the entry is not restored to the database.

## 11.5.2 Troubleshooting

While screen displays offer many advantages, they also require that the software can correctly identify the type of terminal being used or emulated. An incorrect identification may produce unreadable and unusable screens. To exit such a screen, enter `^<Enter>^<Enter>`.

If you continue to find the screens are unreadable, check the following sources for troubleshooting information:

- "System Management" chapter in the "Tools" section of the *VA FileMan Advanced User Manual* (e.g., the "Device Handling for Standalone VA FileMan" section).
- *Kernel Systems Manual* (look for information on "Device Type at Signon" and changing your terminal type).
- Your system manager.

## 12 WORD-PROCESSING Fields





# 13 Choice of Word-processing Editors

WORD-PROCESSING-type fields are typically used so that you can write, edit, and format text for letters and reports, text information in patient records, electronic MailMan messages, application packages, responses, and so on.

VA FileMan provides two editors for WORD-PROCESSING fields: the Line Editor and the Screen Editor. Your system manager may provide other editors as well. Examples of Alternate Editors include: LetterMan and the Extensible Editor.

You can select any of the available editors on the system as your Preferred Editor. If you select a Preferred Editor, that editor will be used whenever you edit a WORD-PROCESSING field. If you *don't* choose a Preferred Editor, the following defaults are used:

- When editing WORD-PROCESSING fields from scrolling mode, the Line Editor is used.
- When editing WORD-PROCESSING fields from a ScreenMan form, the Screen Editor is used.

## ***13.1 How to Select Your Preferred Editor***

To select your preferred editor, perform the following procedure:

1. At any menu prompt, enter "**TBOX**" to go to the User's Toolbox menu.
2. Choose the **Edit User Characteristics** option from the User's Toolbox menu.
3. At the "Select TERMINAL TYPE NAME: " prompt, you can usually just accept the default by pressing the **Enter** key (<**Enter**>).
4. You are now placed in a ScreenMan form where you can edit your user characteristics. Press <**ArrowDown**> until your cursor arrives at the "PREFERRED EDITOR:" prompt.
5. At the "PREFERRED EDITOR:" prompt, you can choose your Preferred Editor. Enter two question marks (??) to get a list of the available editors on your system. Choose one as your Preferred Editor and then press the **Enter** key (<**Enter**>). The Screen Editor is usually a good choice.
6. Press <**PF1**>**E** to exit the ScreenMan form. If you are asked whether to save changes before leaving the form, answer **YES**.

Your Preferred Editor should now be set to the editor you've chosen. This is the editor that will be used whenever you edit the contents of a WORD-PROCESSING field.

## 13.2 Switching to Another Editor While Editing

Selecting your default editor determines which editor is used whenever you edit a WORD-PROCESSING field. However, if you want to *temporarily* switch to another editor once you have started editing, both the Screen Editor and the Line Editor allow you to do this:

- In the Screen Editor:
  1. Press <PF1>A.
  2. Choose the editor to which you wish to switch.
- In the Line Editor:
  1. Choose the Utilities in Word processing option.
  2. At the "Edit Option:" prompt, choose Editor Change.
  3. Choose the editor to which you wish to switch.



**REF:** For more information on the Screen Editor, see Chapter [14](#), "[Screen Editor](#)."

For more information on the Line Editor, see Chapter [15](#), "[Line Editor](#)."

# 14 Screen Editor

To edit the contents of DATA Type field values of WORD-PROCESSING in files, you need to use a word-processing editor. VA FileMan provides two standard editors:

- Screen Editor
- Line Editor

The Screen Editor provides flexibility and freedom not provided by the Line Editor. The Screen Editor provides such features as the following:

- Full-screen editing
- Automatic text wrapping
- Search-and-replace

In most cases, you would want your default editor to be the Screen Editor.

For most people, the Screen Editor should be your Preferred Editor for WORD-PROCESSING fields.



**REF:** For more information on the Line Editor, see Chapter [15](#), "[Line Editor](#)."

To set your default editor, see Chapter [13](#), "[Choice of Word-processing Editors](#)."

If you enter **<PF1>H** at any time in the Screen Editor, you can get online help that lists all the available commands.


At any time, while entering text using the Screen Editor, you can select a command. For example, at any time you can change your left margin, move to a different screen, save your document, or get online help. To invoke most commands, you need to enter only two keystrokes: the **<PF1>** key and a character key, such as **D** for delete line.

You'll usually find the **<PF>** keys at the right-hand side of your terminal keyboard, along with the numeric keypad. If you're using a personal computer rather than a computer terminal, the **<PF>** keys are mostly likely re-mapped to another set of keys (consult your IRM to find out to what keys the **<PF1>** through **<PF4>** are re-mapped).

## 14.1 Screen Editor Screen

The Screen Editor display consists of a status bar at the top and a ruler at the bottom. Between the two status bars is the area where you create and edit text, as shown below:

Figure 102: Screen Editor—Sample WORD-PROCESSING field in the Screen Editor: Sample component parts

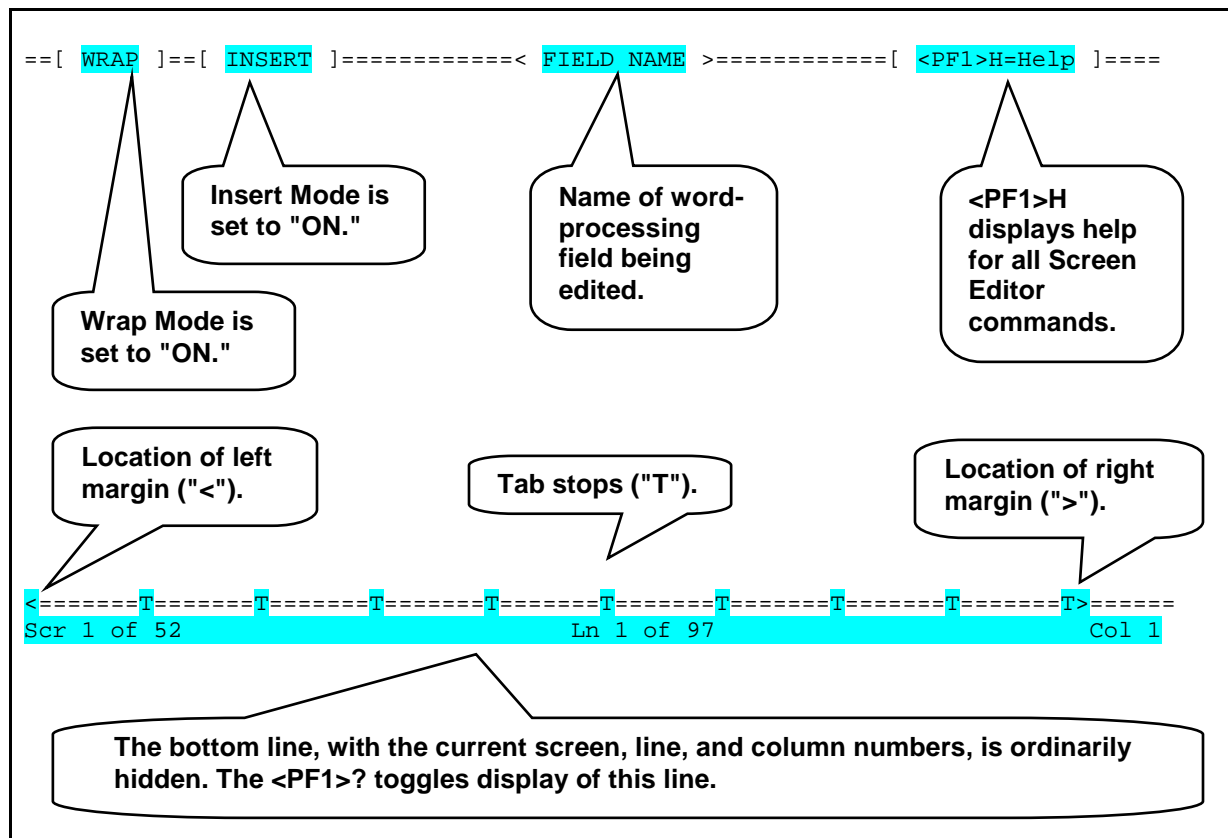

## 14.2 Entering Text

When using the Screen Editor, you type your text as you normally would. As you type, the Screen Editor automatically wraps lines of text to fit within the left and right margins. There is no need to press the **Enter** key at the end of each line. The Screen Editor accepts any printable characters as keyboard input. However, it cannot be used to edit text that contains control characters.

## 14.3 Entering Commands

Editor commands are invoked using keyboard command sequences. The Screen Editor makes use of the <PF> keys, the cursor keypad, and, if available on the keyboard, the edit keypad to perform its editing functions.

## 14.4 Cursor Movement (Navigation Keystrokes)

[Table 21](#) lists the keystrokes you use to navigate while in the Screen Editor:

**Table 21: Screen Editor—Keystrokes to navigate in the Screen Editor**

Action	Key Sequence
Move one column left or right	<ArrowLeft> or <ArrowRight>
Move one line up or down	<ArrowUp> or <ArrowDown>
Move one word left or right	<Ctrl-J> or <Ctrl-L>
Move to next tab stop to the right	<Tab>
Move cursor left or right one screen	<PF1><ArrowLeft> or <PF1><ArrowRight>
Move cursor to beginning or end of line	<PF1><PF1><ArrowLeft> or <PF1><PF1><ArrowRight> OR: <Find> or <Select> OR: <Home> or <End>
Move cursor one screen up or down	<PF1><ArrowUp> or <PF1><ArrowDown> OR: <PrevScreen> or <NextScreen> OR: <Page Up> or <Page Down>
Move to top or bottom of document	<PF1>T or <PF1>B
Go to a specific screen, line, or column.	<PF1>G

You can *move forward quickly across a line* by pressing the Tab key (<Tab>). The Tab key in the Screen Editor does not insert anything into the text. The Tab key is for navigation only and simply moves the cursor to the next tab stop to the right. Another way to move across a line, either forward or backward, is to move a word at a time, using <Ctrl-J> or <Ctrl-L>.

## 14.5 Saving and Exiting

[Table 22](#) lists the keystrokes you use to exit and/or save text while in the Screen Editor:

**Table 22: Screen Editor—Keystrokes to exit and/or save text in the Screen Editor**

Action	Key Sequence
Exit and save text	<PF1>E
Quit without saving	<PF1>Q
Exit, save, and switch editors	<PF1>A
Save without exiting	<PF1>S

If your editing session ends unexpectedly because of hardware failure or another reason that prevents normal exiting, any changes you've made in the current WORD-PROCESSING field *are not* saved. On the other hand, if you time out when editing text, your changes *are* saved.

## 14.6 Finding Text

[Table 23](#) lists the keystrokes you use to find text while in the Screen Editor:

**Table 23: Screen Editor—Keystrokes to find text in the Screen Editor**

Action	Key Sequence
Find text ( <i>not</i> case sensitive)	<PF1>F Brings up a "Find" dialogue (see picture below). To search for text downward, enter the text to find and press the <b>Enter</b> key. To search for text upward, enter the text to find and press <ArrowUp>.
Find next occurrence of text	<PF1>N
Find/Replace text	<PF1>P


**Figure 103: Screen Editor—Dialogue to do a "FIND" while using the Screen Editor**

Find What: <input type="text"/>
Replace with: <input type="text"/>
Option: <input type="checkbox"/> Find Next <input type="checkbox"/> Replace <input type="checkbox"/> Replace All <input type="checkbox"/> Quit

## 14.7 Formatting Paragraphs

[Table 24](#) lists the keystrokes you use to format paragraphs while in the Screen Editor:

**Table 24: Screen Editor—Keystrokes to format paragraphs in the Screen Editor**

Action	Key Sequence
Join and/or break the current line and next line	<p><b>&lt;PF1&gt;J</b></p> <p>Make sure Wrap mode is on before joining or breaking lines (Toggle Wrap mode with <b>&lt;PF2&gt;</b>).</p>
Reformat paragraph	<p><b>&lt;PF1&gt;R</b></p> <p>Joins and/or breaks all lines between current line and next <i>blank</i> line, to create a word-wrapped paragraph. Make sure Wrap mode is on first (Toggle with <b>&lt;PF2&gt;</b>).</p> <p> <b>NOTE:</b> The reformat paragraph command is very useful!</p>



## 14.8 Cutting and Pasting

[Table 25](#) lists the keystrokes you use to cut and paste text while in the Screen Editor:

**Table 25: Screen Editor—Keystrokes to cut and paste text in the Screen Editor**

Action	Key Sequence
Select/Mark text	<b>&lt;PF1&gt;M</b> Position the cursor at the beginning of the text you wish to select and press <PF1>M. Move the cursor to the end of the text you want and press <PF1>M again. The selected text is highlighted in reverse video.
Deselect/Unmark text	<b>&lt;PF1&gt;&lt;PF1&gt;M</b>
Delete selected text	<b>&lt;Delete&gt;</b> or <b>&lt;Backspace&gt;</b> on selected text
Cut and save to buffer	<b>&lt;PF1&gt;X</b> on selected text
Copy and save to buffer	<b>&lt;PF1&gt;C</b> on selected text
Paste from buffer	<b>&lt;PF1&gt;V</b>
Move text to another location	<b>&lt;PF1&gt;X</b> at new location
Copy text to another location	<b>&lt;PF1&gt;C</b> at new location

### To *move or copy* selected text to another location:

1. Select the text (use **<PF1>M**).
2. Place the *cursor at the new location*.
3. Press **<PF1>X** (move text) or **<PF1>C** (copy text).

### To *save* text to the buffer so that you can paste one or more times:

1. Select the text (use **<PF1>M**).
2. With the *cursor on the selected text*, press **<PF1>X** (cut text to buffer) or **<PF1>C** (copy text to buffer).

### To *paste* text from the buffer:

1. Move the cursor to the location you want to paste the text.
2. Press **<PF1>V**.

## 14.9 Deleting

[Table 26](#) lists the keystrokes you use to delete text while in the Screen Editor:

**Table 26: Screen Editor—Keystrokes to delete text in the Screen Editor**

Action	Key Sequence
Character before cursor	<Backspace>
Character at cursor	<PF4> or <Remove> or <Delete> (which key depends on your terminal and keyboard type)
Word at cursor	<Ctrl-W>
From cursor to end of line	<PF1><PF2>
Entire line	<PF1>D

## 14.10 Settings/Modes

[Table 27](#) lists the keystrokes you use to change settings and mode while in the Screen Editor:

**Table 27: Screen Editor—Keystrokes to change the settings and mode in the Screen Editor**

Action	Key Sequence
Wrap/No Wrap mode toggle	<b>&lt;PF2&gt;</b> If wrap is off, left and right margin settings are ignored.
Insert/Replace mode toggle	<b>&lt;PF3&gt;</b> or <b>&lt;Insert Here&gt;</b> or <b>&lt;Insert&gt;</b> Determines whether new characters are inserted before existing text, or instead overwrite existing text.
Set/Clear tab stop	<b>&lt;PF1&gt;&lt;Tab&gt;</b> Change from default tab stops is effective for current session only.
Set left margin	<b>&lt;PF1&gt;&lt;Comma&gt;</b> Move cursor to desired left margin position first.
Set right margin	<b>&lt;PF1&gt;&lt;Period&gt;</b> Move cursor to desired right margin position first.
Status line toggle (on or off)	<b>&lt;PF1&gt;?</b>

## **14.11     *Troubleshooting***

### **14.11.1   Terminal Type Setting**

The Screen Editor is designed for use on all terminal types known in the Kernel computing environment. It is very important that your terminal type be correctly identified to VA FileMan. Refer to the Kernel manuals for more information about how terminal types are identified. Since the <PF> keys are used in the Screen Editor, those keys should not be reprogrammed.

### **14.11.2   <PF> Keys Not Working: How to Exit**

If your <PF> keys do not work in the Screen Editor, your terminal type is probably set incorrectly. Before you can correct the setting, you need to make an emergency exit from the editor by using one of the following keystroke combinations:

- Press <Esc>OPQ (if your keyboard has an Escape key).
- Press <Ctrl-[>OPQ (if your keyboard does not have an Escape key).
- Press <Ctrl-A>@<Enter>Q (if neither of the above methods work).



**NOTE:** You *must* enter all letters in the above key sequences in *uppercase*.

## **14.12     *Screen Editor and Personal Computers***

### **14.12.1     Pasting and Uploading**

If you are accessing your hospital computer system from a personal computer (PC), you can *paste* text from an application on the PC into the Screen Editor, and also *upload* files into the Screen Editor. There are some issues to be aware of when pasting text or uploading files into the Screen Editor.

### **14.12.2     Symbol Characters**

Extended ASCII characters (typically "symbol" characters) cannot be stored in WORD-PROCESSING fields. Examples of such characters include "smart quote" characters, bullets, and symbols. Such characters, when encountered, are stripped or replaced with a **space**, **'**, **"**, or **\***, as appropriate. To avoid problems uploading these types of characters, you should:

- Turn off "smart quotes" in your word processor on your personal computer.
- Avoid using bullets.
- Avoid using symbols in your text such as: ¼, ½, and °.

### **14.12.3     Files: Save as Text**

If you are uploading an entire word processing document (as opposed to pasting), save it first as a "Text Only with Line Breaks" (or similar) file type in your personal computer word processor.

### **14.12.4     Wrap Vs. No Wrap**

If your source document contains a carriage return at the end of every line, turn WRAP off in the Screen Editor before you paste or upload by pressing <PF2>. Turn it back on once the paste or upload is completed. If your source document contains a carriage return at the end of each paragraph only, however, leave WRAP on in the Screen Editor.

### **14.12.5    Avoiding Lost Characters**

If the host computer system can't keep up with the your text upload, characters can get "lost." This can be a factor if you upload large quantities of text or characters. This character loss can occur because pastes and ASCII uploads don't use *error*-correcting communications protocols.

If you notice characters getting lost, one way to solve this is to adjust the "character pacing" (or similar) setting in your terminal emulation program. This can slow down the transfer of text such that characters no longer get lost due to communications overload.

If you need to paste or upload large quantities of text, consider switching to an Alternate Editor such as Kermit that uses an *error*-correcting communications protocol. This automatically compensates for communications overflows, preventing the loss of characters during text transfer. To use Kermit, it must be installed as an Alternate Editor at your site.



# 15 Line Editor

The Line Editor is a scrolling mode editor. It is the second of two standard editors VA FileMan provides for editing WORD-PROCESSING-type fields. The distinguishing characteristic of a Scrolling Mode editor is that you enter your text one line at a time, and that you can only edit lines one at a time. Because word processing in a scrolling mode interface can be cumbersome, you may want to set your Preferred Editor to the Screen Editor. VA FileMan continues to provide the Scrolling-Mode Line Editor, however, for those who prefer it.



**REF:** To set your default editor, see Chapter [13](#), "[Choice of Word-processing Editors](#)."

**NOTE:** For most people, the Screen Editor should be your Preferred Editor for WORD-PROCESSING fields.

## 15.1 Recognizing the Line Editor

When you edit a WORD-PROCESSING field, it's easy to see if VA FileMan chooses the Line Editor as your editor. If the Line Editor is used, the last nine lines of text (if there are that many) are displayed on the screen, with numbered prompts at the start of each line. Also, after the text is listed, you are prompted with "EDIT Option:". The "EDIT Option:" prompt is where you can enter each Line Editor command to work with the text.

For example:

**Figure 104: Line Editor—Example of a WORD-PROCESSING field in the Line Editor**

```
HISTORY:
 1>Owing to poverty in early youth, patient seems not to
 2>have had proper diet. Since achieving economic success,
 3>his diet has been adequate, but traces of original
 4>deficiency remain.
 5>
EDIT Option:
```



## 15.2 How to Enter Text in the Line Editor

If no text exists yet in a WORD-PROCESSING field that you're about to edit, you'll see the field name followed by "1>". This is the Line Editor's prompt for entering word processing text.

For example:

**Figure 105: Line Editor—Prompts for entering word processing text**

```
Select PATIENT FILE NAME: FMPATIENT,FOUR
Select DIAGNOSIS: ANGINA PECTORIS// B-12 DEFICIENCY
HISTORY:
1>
```

You can now enter the text for Line 1 and press the **Enter** key. This brings you to a prompt "2>" for Line 2, and so forth. Keep adding lines until you are done; then, press the **Enter** key on a blank line to finish your edit, as shown below:

**Figure 106: Line Editor—Completing your edits in the Line Editor**

```
HISTORY:
1>Owing to poverty in early youth, patient seems not to<Enter>
2>have had proper diet. Since achieving economic success,<Enter>
3>his diet has been adequate, but traces of original<Enter>
4>deficiency remain.<Enter>
5><Enter>
EDIT Option: <Enter>
Select DIAGNOSIS:
```

## 15.3 Revising Existing Text

To revise the contents of the WORD-PROCESSING field, you need to call up each individual line that you want to edit and then edit each line.

To revise existing text, perform the following procedure:

1. At the "EDIT Option:" prompt, enter the letter "E" for Edit a Line (Replace \_\_ With \_\_).
2. At the "Edit line:" prompt, enter the number of the line you need to revise.
3. Beneath the "EDIT Option:" and "Edit line:" prompts, you see the line of text that you identified by number and you see the "Replace" prompt. Enter a string in the current line to be replaced.
4. If the string you enter is found in the current line, you set the "With" prompt. Enter a string to replace the original string.
5. The line is now updated, and you are prompted for another string to replace. If you are done editing the line, simply press the **Enter** key.

### 15.3.1 Shortcut: Enter Line Number to Edit at "EDIT Option:" Prompt

There's a shortcut to edit a particular line. At the "EDIT Option:" prompt, instead of choosing the Edit a Line (Replace \_\_ With \_\_) option and entering the line number, just enter the line number instead. You are taken directly to the line you specify, and then given the "Replace" prompt to edit the line:

**Figure 107: Line Editor—Shortcut to edit a specific line using the Line Editor**

```
EDIT Option: 5
5>was the time of the day that I wnet over to Building 8 and
Replace wnet With went Replace <Enter>
was the time of the day that I went over to Building 8 and
Edit line:
```

## 15.4 "Replace...With" Edits: Be Careful

When editing individual lines, you make changes using the "Replace...With" dialogue, where you enter an existing string in the line, and a new string to replace it with. Be careful as you enter your responses to the "Replace" and "With" prompts. Enter enough letters to ensure that the computer replaces the desired string of characters.

Here's why this issue is so important. In one line, you may have two identical words or you may have two identical sets of characters embedded. Since the computer changes only the *first* occurrence of any series of letters that you enter, review your line carefully before responding to the "Replace" prompt. Then enter enough identifying characters to correct *the specific word or characters* you wish to change. Let's look at an *incorrect* entry to illustrate the point.

In the example that follows, you need to change the sentence in the second line from "This example is sample" to the sentence "This example is simple."

**Figure 108: Line Editor—Example of an *incorrect* edit with the "Replace...With" editor**

```
EDIT Option: 2
2>This example is sample
Replace ample With imple Replace <Enter>
This eximple is sample
Edit line:
```

As you can see from this example, VA FileMan replaced the *first* occurrence of the "ample" characters. Thus, "example" was changed to "eximple" rather than "sample" being changed to "simple" because the word "example" came before the word "simple" in the sentence (i.e., it was the first occurrence). Obviously, we should have replaced the whole word "sample" with "simple" to avoid any confusion.

## 15.4.1 Shortcuts at the "Replace...With" Prompt

As with editing long field values, you can replace long strings of characters by using ellipses. An ellipsis is three successive periods (...). When editing, you can replace longer strings of characters by using an ellipsis at the "Replace" prompt. You can specify ranges of text to replace for any line (just as with a long text field) with the ellipsis.

For example, to replace an entire line at a "Replace...With" prompt, enter the ellipsis (three periods) at the "Replace" prompt. You are then able to replace the entire default with what you entered at the "With" prompt:

**Figure 109: Line Editor—Using the ellipsis (...) to replace an entire line**

```

EDIT Option: 5
5>care of the boxes.
Replace ... With care to replace the existing supplies. Replace <Enter>
care to replace the existing supplies.
Edit line:

```

## 15.4.2 "Replace..." Prompt Shortcuts

[Table 28](#) lists valid shortcut you can use in the "Replace...With" editor:

**Table 28: Line Editor—"Replace" prompt shortcuts**

Shortcut	Action
...	Replaces everything.
xxx...	Replaces everything starting from the characters "xxx" to the end. <PF1>E.
...xxx	Replaces everything from the beginning up to and including the characters "xxx." <PF1>Q.
xxx...yyy	Replaces everything starting from "xxx" up to and including "yyy." <PF1>A.
end or END	Appends what you enter at the "With" prompt to the end of the value. <PF1>S.

## 15.5 Commands

### 15.5.1 Available Commands

In the Line Editor, all commands are available at the "EDIT Option:" prompt. To see a list of available commands, simply enter two question marks, as shown below:

**Figure 110: Line Editor—Edit options available with the Line Editor**

```

EDIT Option: ??
  Choose, by first letter, a Word Processing Command from the following:
  Add Lines to End of Text
  Break a Line into Two
  Change Every String to Another in a Range of Lines
  Delete Line(s)
  Edit a Line (Replace __ With __)
  Insert Line(s) after an Existing Line
  Join Line to the One Following
  List a Range of Lines
  Move Lines to New Location within Text
  Print Lines as Formatted Output
  Repeat Lines at a New Location
  Search for a String
  Transfer Lines From Another Document
  Utility Sub-Menu
  Y-Programmer Edit
  or type a Line Number to edit that line.
EDIT Option: U <Enter> Utilities in Word-Processing
UTILITY Option: ??
  Choose, by first letter, a Utility Command from the following:
  Editor Change
  File Transfer from Foreign CPU
  Text-Terminator-String Change
UTILITY Option:

```

### 15.5.2 LIST: List the Message

Assume that you've just entered four lines of text in a WORD-PROCESSING field and would now like to review the entire text. After entering text on Line 4 (4>), press the **Enter** key. When prompted for Line 5 (5>), press the **Enter** key again and you'll arrive at the "EDIT Option:" prompt. Enter "L" (for List a Range of Lines option) and choose the range of lines to list (in this case, Lines 1 to 4):

**Figure 111: Line Editor—Example using the List a Range of Lines option**

```

EDIT Option: L <Enter> List line: 1// <Enter> to: 4// <Enter>
  1>Owing to poverty in early youth, patient seems not to
  2>have had proper diet. Since achieving economic success,
  3>his diet has been adequate, but traces of original
  4>deficiency remain.
EDIT Option:

```

### 15.5.3 ADD: Append More Text

After listing lines of text (see [above](#)), suppose you need to add a few comments at the end of your message. From the "EDIT Option:" prompt, enter "A" (for Add Lines to End of Text option). You can now add additional lines:

Figure 112: Line Editor—Example using the Add Lines to End of Text option

```
EDIT Option: A <Enter> add lines
5> Next appointment will be in three weeks.<Enter>
6> Regular appointments need to be set up. <Enter>
7> <Enter>
```

### 15.5.4 JOIN: Combine Two Lines of Text

Suppose you are at the "EDIT Option:" prompt. After briefly reviewing your text, you have decided that Lines 2 and 3 (2> and 3>) are too short. You can use the Join command (i.e., Join Line to the One Following option) to join Line 2 to the next line:

Figure 113: Line Editor—Example using the Join Line to the One Following option

```
EDIT Option: J <Enter> join line: 2// <Enter> to: 3// <Enter>
2>left by
3>the doorway.
EDIT Option: J <Enter> join line: 2
2>left by the doorway.
..
EDIT Option:
```

### 15.5.5 INSERT: Insert New Line(s) of Text Between Existing Ones

Suppose that you want to insert new lines of text in the middle of existing text in a WORD-PROCESSING field. Using the [Add Lines to End of Text](#) won't work, because that appends new text lines at the *end* of the existing lines. Instead, you can use the Insert command [i.e., Insert Line(s) after an Existing Line option], to do this:

Figure 114: Line Editor—Example using the Insert Line(s) after an Existing Line option

```
EDIT Option: I <Enter> insert after line: 1// <Enter> to: 5// <Enter>
1>The delivery people came, and left several packages
2>by the doorway.
3>We've got some work ahead of us now.
EDIT Option: I <Enter> insert after line: 2
3> <Enter>
4> Finally, the order arrived! <Enter>
5> <Enter>
```

## 15.5.6 DELETE: Delete a Line or Lines

Occasionally, you may need to delete lines of text in a WORD-PROCESSING field. Use the Delete command [i.e., Delete Line(s) option] at the "EDIT Option:" prompt to do this:

**Figure 115: Line Editor—Example using the Delete Line(s) option**

```

EDIT Option: D <Enter>   delete from line: 5 <Enter> thru: 3// 6

OK TO REMOVE 2 LINES? No// Y <Enter>   (Yes).....
 1>The delivery people came, and left several packages
 2>by the doorway.
 3>
 4>Finally, the order arrived!
EDIT Option:

```

## 15.6 Advanced Features

Most of the features of the Line Editor are self-explanatory and simple to use. However, a few require additional explanation, as follows in this chapter.



**NOTE:** To see a full list of the commands available at the "EDIT Option:" prompt, enter two question marks (??), as shown in [Figure 110](#).

### 15.6.1 File Transfer (Use When Uploading ASCII Text)

The File Transfer from Foreign CPU option from the Utility Sub-Menu lets you upload text from another system into your WORD-PROCESSING field text, using an ASCII (*non-error-correcting*) transfer. For example, if you are connected from a personal computer (PC), you can use your communication software to send a text file.

The file to be transferred must be a text (pure ASCII) file. Most word processing programs have a way of saving a document as text (i.e., without special formatting information); check your word processor's manual. Also, you need to know how to send a text file using your PC's communication software; if you're not sure how, check your communications software manual.

To use the File Transfer from Foreign CPU option, perform the following procedure:

1. Make sure the file you are transferring is a pure ASCII text file.
2. While editing a WORD-PROCESSING field in the Line Editor, choose the Utility Sub-Menu option at the "EDIT Option:" prompt. Then choose the File Transfer from Foreign CPU option from the Utility Sub-Menu.
3. At the "MAXIMUM string length? : (3-245):" prompt, enter maximum string length for lines you are uploading.
4. The Line Editor now waits up to 30 seconds for you to initiate an ASCII transfer of the file.
5. Use your communications software to perform an ASCII upload of the file. All uploaded text is appended to the WORD-PROCESSING field that you are editing.
6. Once you have finished uploading, it takes 30 seconds of inactivity until the transfer can complete. When done, and after 30 seconds of inactivity, the computer responds "FILE TRANSFER COMPLETE" and you are returned to the "EDIT Option:" prompt.

The same precautions apply for uploading large quantities of text to the Line Editor as apply with the Screen Editor. In particular, if you need to upload large quantities of text quickly, consider switching to an Alternate Editor such as Kermit (if installed as an Alternate Editor by your site) which provides *error-correcting* communications protocol. Unlike an ASCII transfer (used with the File Transfer option), an error-correcting protocol such as Kermit can transfer text and automatically compensate for any communications overflows, without losing characters.

## 15.6.2 Text Terminator-String Change



Use When Uploading Text with Blank Lines.

In the Line Editor, a blank line (null string) signals the end of data entry (and returns you to the "EDIT Option:" prompt. Thus, if you plan to *paste* or *upload* text into the Line Editor from a personal computer, any blank lines in the uploaded text have the side effect of signaling the end of data entry (prematurely). One way around this is to use the [File Transfer from Foreign CPU option](#) (see above). Another way around this problem is to use the Text-Terminator-String Change option on the Utility Sub-Menu. This lets you change the text terminator so that some character string, rather than a blank line, is what is used to signal the end of data entry.

You can change the text terminator to any string of between one and five characters; question marks (?) or carets ("^") are *not* allowed in the string. To finish editing a WORD-PROCESSING field and get to the "EDIT Option:" prompt, simply enter your new text terminator string instead of pressing the **Enter** key on a blank line. You should choose a text terminator that doesn't appear in your text: "end" would not be a good choice, but "EnD" might be.

The new text terminator is *not permanent*; it remains only as long as you are editing a particular WORD-PROCESSING field. You can change it back to a null line by entering an at-sign (@) at the "Text-

Terminator:" prompt. You can permanently change your default text terminator by changing it in your user characteristics as described in the Kernel manuals.

### 15.6.3 Programmer Edit (Edit Lines with M Commands)

The Y-Programmer Edit option (invoked by entering the letter **Y**) is only available to users with programmer's access. You can enter a line of M code that, line-by-line, reads in the current line in variable X and returns the transformed line in variable Y. You can specify the range of lines to be transformed by the M code you enter.

For example, to blank out all lines containing the words "Top Secret", you could enter the following M code:

**Figure 116: Line Editor—Example of entering M code while using the Y-Programmer Edit option**

```
EDIT Option: Y  
The text is in X and returned in Y  
Enter MUMPS xecute string to do transformation: I X["Top Secret" S Y=" "
```

### 15.6.4 Editor Change: Switch Editors

The Editor Change option, on the Utility Sub-Menu, shows you a list of the editors available for your use, if you enter two question marks (??) at the "Select ALTERNATE EDITOR:" prompt. The editors include VA FileMan's own editors (the Line Editor and Screen Editor) and any other editors to which you have access. You choose the editor to use by entering its name. When you exit your chosen editor, you return to the Line Editor's "EDIT option:" prompt.



## 15.6.5 Transfer Text (from Another WORD-PROCESSING Field)

The Transfer Lines From Another Document option lets you copy text from some other WORD-PROCESSING field into your current field. You need to specify on which line of the current field to place the incoming text and identify the source of the text.

To identify the source of the text, you need to use extended pointer syntax, which is described in the "Relational Navigation" chapter of the *VA FileMan Advanced User Manual*. The syntax lets you specify the particular field of a specific entry in a specific file. Briefly, the syntax can be in one of the following two forms:

```
<expression>:<file>:<field>
```

OR

```
<expression> IN <file> FILE:<field>
```

The *<expression>* or lookup value has several possible forms. One way to refer to the field is by entry name. To retrieve text from the WORD-PROCESSING PROGNOSIS field of the entry Angina Pectoris in a file named DIAGNOSES, you could enter the following:

**Figure 117: Line Editor—Dialogue of the Extended Pointer Syntax while using the Transfer Lines From Another Document option: Sample user entries at prompts (Example #1)**


```
EDIT Option: T <Enter> transfer incoming text after line: 1
From what text: ?

Select another entry in this file, OR
use relational syntax to pick up information from a word-
processing field in another file.
ex. "VALUE":FILE NAME:WORD PROCESSING FIELD NAME

Do you want the entire TEST list?
Enter Yes or No: ^
From what text: "Angina Pectoris":DIAGNOSES:PROGNOSIS
From line: 1 <Enter> thru: 20
ARE YOU SURE? NO// Y <Enter> (YES)... . .
```

Alternately, you can use the second syntax to retrieve the same field in the same file entry:


**Figure 118: Line Editor—Dialogue of the Extended Pointer Syntax while using the Transfer Lines From Another Document option: Sample user entries at prompts (Example #2)**

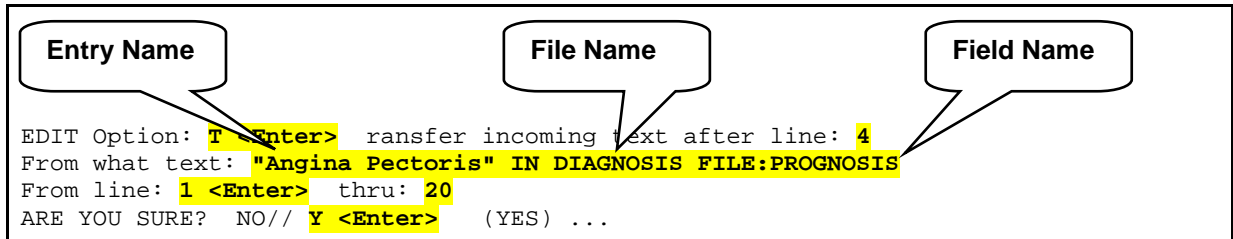

The requested text is identified by the value of the .01 field in quotes ("Angina Pectoris"). Thus, in this example the **<expression>** is the entry's name. You also specify which lines you want to transfer. If you enter a single question mark (?) at the "From line:" prompt, you can list the current numbered lines in the WORD-PROCESSING field. You can then easily choose the lines to be transferred.

If the field from which you are transferring text displays text without wrapping, you'll receive the following message:

**Figure 119: Line Editor—Example of a possible warning message when Using the Transfer Lines From Another Document option**

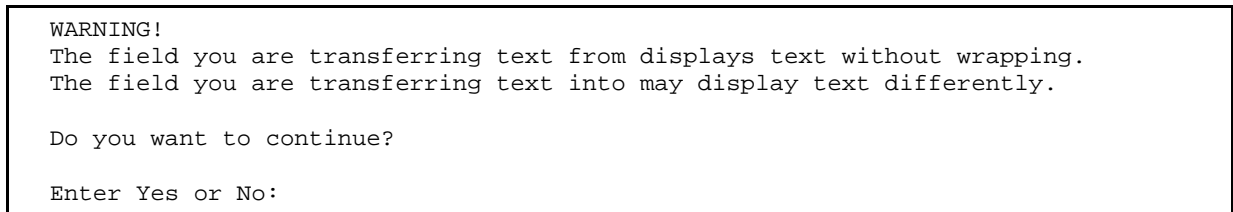

Consider the possibility that the text transferred from the no-wrap field may be unreadable, if the field you are transferring into does wrap text. For example, a spreadsheet might lose the alignment of its columns.

If the transfer does *not* succeed, the message **<no change>** is shown. The transfer might fail for several reasons:

- Incorrect syntax for the extended pointer.
- An attempted transfer from other than a WORD-PROCESSING field type.
- Lack of permission to read the file from which you are trying to extract text.

You must have READ ACCESS to transfer text from a file.



**REF:** For details of the different types of file security, see the "Data Security" chapter in the *VA FileMan Advanced User Manual*.

# Glossary

.001 FIELD	A field containing the internal entry number of the record.
.01 FIELD	The one field that must be present for every file and file entry. It is also called the NAME field. At a file's creation the .01 field is given the label NAME. This label can be changed.
ACCESS CODES	In VA FileMan, a string of codes that determines your security access to files, fields, and templates. In Kernel, you enter an Access Code to identify yourself during signon.
ALTERNATE EDITOR	One of the text editors available for use from VA FileMan. Editors available vary from site to site. They are entries in the ALTERNATE EDITOR file (#1.2).
AT-SIGN (@)	A VA FileMan security Access Code that gives the user programmer-level access to files and to VA FileMan's developer features. See <a href="#">Programmer Access</a> . Also, the character "@" (i.e., at-sign) is used at VA FileMan field prompts to delete data.



**Programmer access in VistA is defined as DUZ(0)="@". It grants the privilege to become a programmer in VistA. Programmer access allows you to work outside many of the security controls enforced by VA FileMan, enables access to all VA FileMan files, access to modify data dictionaries, etc. It is important to proceed with caution when having access to the system in this way.**

AUDIT TRAIL	The record or log of an ongoing audit.
AUDITING	The monitoring and recording of computer use.
BACKWARD POINTER	A pointer to your current file from another file; used in the extended pointer syntax.
BOOLEAN EXPRESSION	A logical comparison between values yielding a true or false result. In M, zero means false and non-zero (often one) means true.
CANONIC NUMBER	A number with no leading zeros and no trailing zeros after a decimal point.
CAPTION	In <a href="#">ScreenMan</a> , a label displayed on the screen. Captions often identify fields that are to be edited.
COMMAND AREA	In <a href="#">ScreenMan</a> , the bottom portion of the screen used to display help information and to accept user commands.

CROSS-REFERENCE	An attribute of a field or a file that identifies an action that should take place when the value of a field is changed. Often, the action is the placement of the field's value into an index. A Traditional cross-reference is defined with a specific field. A New-Style cross-reference is a file attribute and can be composed of one or more fields. New-Style cross-references are stored in the INDEX file (#.11).
CURSOR	On your display terminal, the line or rectangle identifying where your next input will be placed on the screen.
DATA DICTIONARY	A record of a file's structure, its elements (fields and their attributes), and relationships to other files. Often abbreviated as DD.
DATA TYPE	The kind of data stored in a field. NUMERIC, COMPUTED, and WORD-PROCESSING are examples of VA FileMan DATA TYPEs.
DATABASE	An organized collection of data spanning many files. Often, all the files on a system constitute that system's database.
DECENTRALIZED HOSPITAL COMPUTER PROGRAM (DHCP)	See <a href="#">VistA</a> .
DEFAULT	A computer-provided response to a question or prompt. The default might be a value pre-existing in a file. Often, you can change a default.
DEVICE PROMPT	A Kernel prompt at which you identify where to send your output.
EDIT WINDOW	In <a href="#">ScreenMan</a> , the area in which you enter or edit data. It is highlighted with either reverse video or an underline. In Screen Editor, the area in which you enter and edit text; the area between the status bar and the ruler.
ENTRY	A record in a file. "Entry" and "record" are used interchangeably.
EXTENDED POINTERS	A means to reference fields in files other than your current file.
FIELD	In an entry, a specified area used to hold values. The specifications of each VA FileMan field are documented in the file's data dictionary.
FIELD NUMBER	The unique number used to identify a field in a file. A field can be referenced by "#" followed by the field number.
FILE	A set of related records (or entries) treated as a unit.
FORM	In <a href="#">ScreenMan</a> , a group of one or more pages that comprise a complete transaction. Comparable to an <a href="#">INPUT template</a> .
FREE TEXT	A <a href="#">DATA TYPE</a> that can contain any printable characters.

FULL-SCREEN EDITING	The ability to enter data in various locations on the two-dimensional computer display. Compare to scrolling mode.
HISTOGRAM	A type of bar graph that indicates frequency of occurrence of particular values.
IDENTIFIER	In VA FileMan, a field that is defined to aid in identifying an entry in conjunction with the NAME field.
INDEX	An ordered list used to speed retrieval of entries from a file based on a value in some field or fields. The term "simple index" refers to an index that stores the data for a single field; the term "compound index" refers to an index that stores the data for more than one field. Indexes are created and maintained via cross-references.
INPUT TEMPLATE	A pre-defined list of fields that together comprise an editing session.
INTERNAL ENTRY NUMBER	The number used to identify an entry within a file. Every record has a unique internal entry number. Often abbreviated as IEN.
KERNEL	A <a href="#">VistA</a> software package that functions as an intermediary between the host operating system and <a href="#">VistA</a> application packages. Kernel includes installation, menu, security, and device services.
KEY	A group of fields that, taken collectively, uniquely identifies a record in a file or subfile. All fields in a key must have values. The term "simple key" refers to keys that are composed of only one field; the term "compound key" refers to keys that are composed of more than one field. Keys are stored in the KEY file (#.31)
LAYGO	A user's authorization to create a new entry when editing a computer file. An acronym for Learn As You Go.
LINE EDITOR	The VA FileMan editor that lets you input and change text on a line-by-line basis. The Line Editor works in scrolling mode. See <a href="#">Screen Editor</a> .
LOOKUP	To find an entry in a file using a value for one of its fields.
MAILMAN	An electronic mail system (e-mail) that allows you to send messages to and receive them from other users via the computer. It is part of <a href="#">VistA</a> .
MENU	A list that includes the names of options from which you can select an activity.
MULTIPLE	A VA FileMan <a href="#">DATA TYPE</a> that allows more than one value for a single entry. See <a href="#">Subfile</a> .
MUMPS	Abbreviated as M. The American National Standards Institute (ANSI) computer language used by VA FileMan and throughout <a href="#">VistA</a> . The acronym MUMPS stands for Massachusetts General Hospital Utility Multi Programming System.

NAME FIELD	The one field that must be present for every file and file entry. It is also called the .01 field. At a file's creation the .01 field is given the label NAME. This label can be changed.
NAVIGATION	<ol style="list-style-type: none"> <li>1. Navigation can mean switching your reference point from one file to another.</li> <li>2. Navigation can also mean moving your cursor around a terminal display or a document using cursor keys and other commands.</li> </ol>
NON-CANONIC NUMBER	A number with either leading zeros, or trailing zeros after a decimal point. M treats non-canonic numbers as text instead of as numbers.
NON-NULL	A value other than null. A space and zero are non-null values.
NULL	Empty. A field or variable that has no value associated with it is null.
NULL RESPONSE	When replying to a prompt, pressing only the <b>Enter</b> key, abbreviated as <b>&lt;Enter&gt;</b> , to enter nothing.
NUMERIC EXPRESSION	An expression whose value is a number. Compare to string expression.
OPERATOR	One of the processes done to the elements in an expression to create a value.
OPTION	A computing activity that you can select, usually a choice from a menu.
PASTE	Insert text or other data as input into one computer program that has been copied into a clipboard by the same or by another computer program.
PATTERN MATCH	In M, an operator that compares the contents of a variable or literal to a specified pattern of characters or kinds of characters.
PF KEYS	Keys on a terminal keyboard labeled PF1, PF2, etc. that are used to perform special functions instead of displaying visible characters.
POINTER TO A FILE	A field <a href="#">DATA TYPE</a> that contains an explicit reference to an entry in a file. POINTER TO A FILE-type fields are used to relate files to each other.
POPUP PAGE	In <a href="#">ScreenMan</a> , a page that overlays the regular ScreenMan screen in order to present the contents of a selected Multiple.
PREFERRED EDITOR	The editor always entered when you access a WORD-PROCESSING-type field; your default editor. Kernel must be present to establish a Preferred Editor.
PRINT TEMPLATE	The stored specifications of a printed report, including fields to be printed and formatting instructions.

**PROGRAMMER ACCESS** The ability to use VA FileMan features that are reserved for application developers. Referred to as "having the at-sign ('@')" because the at-sign is the DUZ(0) value that grants programmer access.



**Programmer access in VistA is defined as DUZ(0)="@". It grants the privilege to become a programmer in VistA. Programmer access allows you to work outside many of the security controls enforced by VA FileMan, enables access to all VA FileMan files, access to modify data dictionaries, etc. It is important to proceed with caution when having access to the system in this way.**

**PROMPT** A question or message from the computer requiring your response.

**RECORD** A set of data pertaining to a single entity in a file; an entry in a file.

**RECORD NUMBER** See [Internal Entry Number](#).

**RELATIONAL NAVIGATION** Changing your current (or primary) file reference to another file. Relational navigation is accomplished by using the extended pointer syntax without specifying a field in the referenced file.

**REQUIRED FIELD** A field that cannot be left null for an entry.

**SCATTERGRAM** A graph in which occurrences of two fields are displayed on an X-Y coordinate grid to aid in data analysis.

**SCREEN EDITOR** VA FileMan's [Screen-oriented](#) text editor. It can be used to enter data into any WORD-PROCESSING field using full-screen editing instead of line-by-line editing. See [Line Editor](#).

**SCREEN-ORIENTED** A computer interface in which you see many lines of data at a time and in which you can move your cursor around the display screen using screen navigation commands. Compare to [Scrolling Mode](#).

**SCREENMAN** The set of routines that supports [Screen-oriented](#) data editing and data display.

**SCROLLING MODE** The presentation of the interactive dialogue one line at a time. Compare to [Screen-oriented](#).

**SDP** An area on disk set aside for temporary, sequential storage of data; an abbreviation for Sequential Disk Processor. It is available on some M implementations (e.g., DSM-11).

**SEARCH TEMPLATE** The saved results of a search operation. Usually, the actual entries found are stored in addition to the criteria used to select those entries.



SECURITY	The strategies and procedures used to ensure that user access to data and data structures is controlled and appropriate.
SET OF CODES	A field <a href="#">DATA TYPE</a> where a short character string is defined to represent a longer value.
SIMPLE EXTENDED POINTERS	An extended pointer that uses a pre-existing pointer relationship to access entries in another file.
SORT	To place items in order, often in alphabetical or numeric sequence.
SORT TEMPLATE	The stored record of sort specifications. It contains sorting order as well as restrictions on the selection of entries. Used to prepare entries for printing.
STUFF	To place values directly into a field, usually with no user interaction.
SUBENTRY	An entry in a <a href="#">Multiple</a> ; also called a subrecord.
SUBFIELD	A field in a <a href="#">Multiple</a> .
SUBFILE	The data structure of a <a href="#">Multiple</a> . In many respects, a Subfile has the same characteristics as a <a href="#">File</a> .
TERMINAL EMULATION	Using one kind of terminal or computer display to mimic another kind. Often used with PC remote communication applications.
TERMINAL TYPE	The designation of the kind of computer peripheral being used (e.g., the kind of video display or printer). Full terminal type functionality is supplied by Kernel.
TRUTH TEST	An evaluation of an expression yielding a true or false result. In M, usually a 1 (true) or a 0 (false) is returned from a truth test.
CARET	The ^ character (caret); used in VA FileMan for exiting an option or canceling a response. Also used in combination with a field name or prompt to jump to the specified field or prompt.
UPLOAD	Send a file from one computer system to another (usually using communications software).
VistA	The Veterans Health Information Systems and Technology Architecture (VistA), within the Department of Veterans Affairs, is the component of the Veterans Health Administration that develops software and installs, maintains, and updates compatible computer systems in VA medical facilities. (Previously known as the Decentralized Hospital Computer Program [DHCP].)



**REF: REF:** For a list of commonly used terms and definitions, see the OIT Master Glossary VA Intranet Website:

[http://vaww.oed.wss.va.gov/process/Library/master\\_glossary/masterglossary.htm](http://vaww.oed.wss.va.gov/process/Library/master_glossary/masterglossary.htm)

For a list of commonly used acronyms, see the VA Acronym Lookup Intranet Website:

<http://vaww1.va.gov/Acronyms/index.cfm>



# Index

## A

### Abbreviations

Dates, 74

Times, 75

### Acceptable Formats for Entering

Dates, 73

Times, 74

### Access

LAYGO, 4

### Acronyms

Intranet Website, 142

### Add (Append) More Text (Line Editor), 129

### Add a Record at a POINTER TO A FILE Field, How to, 89

### Add a Record, How to, 85

### Add Lines to End of Text Option, 129

### Adding

From Multiples, 91

Records, 85

### Adding a

Duplicate Record, 86

Duplicate-Named Entry, 90

New Entry to a Multiple

ScreenMan, 104

### Advanced Features

Line Editor, 130

### Assumptions about the Reader, xxiii

### At-sign

Deleting

Field's Value, 66

File/Record Entry, 85, 86

Multiple Entry, 91

Subrecord, 104

Template, 29

Text at the Replace... prompt, 63

Text Terminator, 131

Entering Times, 74

Including Null Records in a Report, 19

Omit Headers and Page Feeds from Printed  
Output, 33

Omit Headers from Printed Output, 33

Suppressing Subheaders, 21

Audit Trail, 10

### Avoiding Lost Characters

Screen Editor, 122

## B

### Browser, 48

As an Option, 54

Clipboard, 51

Cursor Movement (Navigation Keystrokes),  
50

Features, 49

Navigation Keystrokes, 50

Online Help, 52

Other Features, 53

Screen, 49

Search, 52

## C

Callout Boxes, xxi

Capabilities When Printing, 14

CAPTIONED OUTPUT

- COMPUTED Fields and Record Numbers, 31
  - Template, 79
- CAPTIONED PRINT Template, 30, 79
- Characters Lost, Avoiding
  - Screen Editor, 122
- Choose Your Own
  - Device, 12
  - Print Fields, 11, 24
  - Word Processing Editors, 110
- Clipboard
  - Browser, 51
- Column Format for VA FileMan Prints, 15
- Commands
  - Available with the Line Editor, 128
  - ScreenMan Command Line Options:, 99
- Compound Key, 65
- COMPUTED DATA TYPE Fields, 79
- Computed Fields, 10
- COMPUTED Fields and Record Numbers in CAPTIONED OUTPUT, 31
- Conditions
  - Combining in a Search, 39
  - Entering in a Search, 37
  - Tests in a Search, 37
- Conventions
  - Documentation, xx
- Creating
  - PRINT Templates, 28
  - SEARCH Templates, 43
  - SORT Templates, 10, 23
- Criteria, Saving in
  - PRINT Templates, 28
  - SEARCH Templates, 43
  - SORT Templates, 23
- Cursor Movement (Navigation Keystrokes)
  - Browser, 50
  - Screen Editor, 114
  - ScreenMan, 97, 100
- Custom Footers, 35
- Custom Headings and Footers, 34
- Cutting and Pasting
  - Screen Editor, 117
- D**
- Data Dictionary
  - Data Dictionary Utilities Menu, xxiii
  - Listings, xxiii
- Data Entry Session (Typical Example), 69
- Data Types of Fields, 72
  - DATE/TIME, 73
  - FREE TEXT, 77
  - NUMERIC, 75
  - SET OF CODES, 76
  - WORD-PROCESSING, 77
- DATA TYPEs of Fields
  - COMPUTED, 79
  - Multiples (Subfiles), 83
  - POINTER TO A FILE, 80
  - Subfiles (Multiples), 83
  - VARIABLE-POINTER, 81
- Database and Files, 2
- DATE/TIME Data Type Fields, 73
- Dates
  - Abbreviations, 74
  - Acceptable Formats, 73
- Default Responses, 61
- Default Responses (Longer), 62
- Delete Line(s) Option, 130
- Deleting

## Index

- A Field's Value with the at-sign, 66
- A Multiple (Subfile) Entry in ScreenMan, 104
- From Multiples, 91
- How to Delete a Record, 86
- Lines of Text in the Line Editor, 130
- Records, 85
- Screen Editor, 118
- ScreenMan, 101
- Details
  - ScreenMan, 106
  - Search, 42
- Devices, Choose Your Own, 12
- DI DDU Menu, xxiii
- Differences from Scrolling Mode Editing
  - ScreenMan, 95
- DILIST Option, xxiii
- Disclaimers, xx
- Displaying Information, 6
- Documentation
  - Conventions, xx
  - Symbols, xx
- Documentation Navigation, xxii
- Duplicates
  - Adding a
    - Duplicate Record, 86
    - Duplicate-Named Entry, 90
- E**
- Edit a Line (Replace \_\_ With \_\_) option, 126
- Edit Fields
  - How to do it in ScreenMan, 100
- Edit Lines with M Commands
  - Line Editor, 132
- Edit User Characteristics Option, 110
- Editing
  - Records, 56
  - ScreenMan, 100
- Editor Change Option, 132
- Editors
  - Change (Switch) Editors
    - Line Editor, 132
  - Choice of Word Processing Editors, 110
  - Line Editor, 124
  - Replace...With, 62, 72, 126, 127
  - Screen Editor, 112
  - Select Your Preferred Editor, 110
  - Switch (Change) Editors
    - Line Editor, 132
  - Switching to Another Editor While Editing, 111
  - WORD-PROCESSING Fields, 77
  - Zoom Editor in ScreenMan, 102
- Edits
  - Edit User Characteristics Option, 110
  - How to File in ScreenMan, 106
- Ellipsis, 127
- Enter** Key (<Enter>), 58
- Enter or Edit File Entries Option, 92
- Entering
  - Commands in the Screen Editor, 113
  - Text in the
    - Line Editor, 125
    - Screen Editor, 113
- Example
  - Data Entry Session (Typical), 69
- Exiting
  - Screen Editor, 115
  - ScreenMan, 98
    - From a Subpage:, 103

- With the Up-Arrow, 67
- External vs. Internal Field Values
  - Search Conditions, 44
  - SET OF CODES, 76
- F**
- Features
  - Browser, 49
  - Line Editor Advanced Features, 130
  - Other Features of the Browser, 53
  - Other Print Features, 32
  - Search, 42
- Field Prompts
  - Special Responses to, 66
- Fields
  - .01 Field, 85
  - Choosing Fields to Print, 24
  - Data Types, 72
    - DATE/TIME, 73
    - FREE TEXT, 77
    - NUMERIC, 75
    - SET OF CODES, 76
    - WORD-PROCESSING, 77
  - DATA TYPEs
    - COMPUTED, 79
    - Multiples (Subfiles), 83
    - POINTER TO A FILE, 80
    - Subfiles (Multiples), 83
    - VARIABLE-POINTER, 81
  - Deleting a Field's Value, 66
  - Jumping to Another Field, 66
  - Mandatory (Required), 67
  - Required (Mandatory), 67
- Fields, Records, and Files, 1
- Figures, xi
- File Access
  - LAYGO, 4
- File Edits
  - How to do it in ScreenMan, 106
- File Transfer from Foreign CPU Option, 130
  - Line Editor, 130
- FileMan
  - Prompts, 58
  - What is it?, xvii
- Files
  - PATIENT (#200), 80, 81
  - PROVIDER (#6), 81
  - STATE (#5), 80, 81
- Files and the Database, 2
- Files, Save as Text
  - Screen Editor, 121
- Finding Text
  - Screen Editor, 115
- Footers
  - Customized, 34, 35
- Forcing Creation of a
  - PRINT Template, 29
  - SORT Template, 23
- Format
  - Output in a Search, 41
  - Paragraphs in the Screen Editor, 116
- FREE TEXT Data Type Fields, 77
- G**
- Getting Online Help at Any Prompt, 60
- Glossary, 136
  - Intranet Website, 142
- H**
- Headings

## Index

Customized, 34

## Help

At Prompts, xxiii

Getting Online Help at Any Prompt, 60

Online, xxiii

Question Marks, xxiii

## Home Pages

Acronyms Intranet Website, 142

Adobe Website, xxiv

Glossary Intranet Website, 142

VA Software Document Library (VDL)  
Website, xxiv

VistA Development Website, xx

## How to

Add a Record, 85

Add a Record at a POINTER TO A FILE  
Field, 89

Delete a Record, 86

Edit Fields

ScreenMan, 100

Enter Text in the Line Editor, 125

Exit the Screen Editor When PF Keys Not  
Working, 120

File Edits

ScreenMan, 106

Navigate Between Fields

ScreenMan, 97

Navigate Between Pages

ScreenMan, 98

Obtain Technical Information Online, xxii

Print Reports from Files, 14

Revise Existing Text in the Line Editor, 125

Search, 36

Select Your Preferred Editor, 110

Use this Manual, xviii

## HTML Manuals, xix

## I

Incorrect Responses, 60

Information

Displaying, 6

Inquire, 8

Inquire to File Entries Option, 9, 14

Standard Captioned Output, 10

Insert Line(s) after an Existing Line Option, 129

Insert New Lines of Text (Line Editor), 129

Intended Audience, xix

Internal vs. External Field Values

Search Conditions, 44

SET OF CODES, 76

Introduction, xvii

## J

Join (Combine) Two Lines of Text (Line  
Editor), 129

Join Line to the One Following Option, 129

Jumping to Another Field with the up-arrow, 66

## K

KERNEL SYSTEM PARAMETERS file, 32

Key Fields, 65

## L

LAYGO File Access, 4

Legal Requirements, xix

Line Editor, 124

Add (Append) More Text, 129

Add Lines to End of Text Option, 129

Advanced Features, 130

Change (Switch) Editors, 132

Commands, 128

Delete Line(s) Option, 130



- Deleting Lines of Text, 130
- Edit Lines with M Commands, 132
- Editor Change Option, 132
- Entering Text, 125
- File Transfer from Foreign CPU Option, 130
- Insert Line(s) after an Existing Line Option, 129
- Insert New Lines of Text, 129
- Join (Combine) Two Lines of Text, 129
- Join Line to the One Following Option, 129
- List a Range of Lines Option, 128
- List the Message, 128
- Programmer Edit, 132
- Recognizing, 124
- Revising Text, 125
- Shortcuts, 126
- Switch (Change) Editors, 132
- Text-Terminator-String Change Option, 131
- Transfer Lines From Another Document Option, 133
- Transfer Text (from Another WORD-PROCESSING Field), 133
- Uploading Text with Blank Lines, 131
- Y-Programmer Edit Option, 132
- List a Range of Lines Option, 128
- List File Attributes Option, xxiii
- List of Choices Prompts, 64
- List the Message (Line Editor), 128
- Long Fields
  - ScreenMan, 102
- Longer Default Responses, 62
- M**
- Mandatory (Required) Fields, 67
- Manuals
  - In HTML, xix
- Reference, xxiii
- Menus
  - Data Dictionary Utilities, xxiii
  - DI DDU, xxiii
- Modes
  - Screen Editor, 119
  - ScreenMan, 101
  - Scrolling Mode vs. Screen Mode, 4
- Multiple Copies of a Print, 32
- Multiples (Subfiles)
  - Adding a
    - New Entry in ScreenMan, 104
  - Adding and Deleting from, 91
  - DATA TYPE Fields, 83
  - DATA TYPEs Fields
    - Adding and Deleting from, 91
  - Deleting an Entry in ScreenMan, 104
  - In Repeating Blocks in ScreenMan, 105
  - Linked to "Popup" Subpages in ScreenMan, 103
  - ScreenMan, 102
  - Searching for, 45
- N**
- Navigate Between
  - Fields
    - How to do it in ScreenMan, 97
  - Pages
    - How to do it in ScreenMan, 98
- Navigation Keystrokes
  - Browser, 50
  - Screen Editor, 114
  - ScreenMan, 97
- Navigational Keys for Repeating Blocks
  - ScreenMan, 106

## Index

Null Fields in Your Sort, 19

## Numbers

    Canonic Numbers and Non-Canonic Strings,  
    17

NUMERIC Data Type Fields, 75

## O

### Online

    Documentation, xxiii

    Technical Information, How to Obtain, xxii

### Online Help

    Browser, 52

Operators for Combining Search Conditions, 39

### Options

    Add Lines to End of Text, 129

    Browser, 54

    Data Dictionary Utilities, xxiii

    Delete Line(s), 130

    DI DDU, xxiii

    DILIST, xxiii

    Edit a Line (Replace \_\_ With \_\_), 126

    Edit User Characteristics, 110

    Editor Change, 132

    Enter or Edit File Entries, 92

    File Transfer from Foreign CPU, 130

    Inquire to File Entries, 9, 14

    Insert Line(s) after an Existing Line, 129

    Join Line to the One Following, 129

    List a Range of Lines, 128

    List File Attributes, xxiii

    Print File Entries, 14

    Text-Terminator-String Change, 131

    Transfer Lines From Another Document,  
    133

    Y-Programmer Edit, 132

Order When Sorting, 17

Orientation, xviii

### Other Features

    Browser, 53

    Print, 32

### Output

    Format in a Search, 41

## P

Partial Responses, 61

### Pasting and Cutting

    Screen Editor, 117

### Pasting and Uploading

    Screen Editor, 121

PATIENT File (#200), 80, 81

Personal Computers and the Screen Editor, 121

PF Keys Not Working, How to Exit in the  
    Screen Editor, 120

POINTER TO A FILE DATA TYPE Fields, 80

PREFERRED EDITOR Prompt, 110

### Print, 14

    Capabilities, 14

    CAPTIONED PRINT Template, 30

    Choosing Fields to Print, 24

    Custom Footers, 35

    Custom Headings and Footers, 34

    Forcing Creation of a PRINT Template, 29

    Including Null Fields in Your Sort, 19

    Inserting Multiple-type Print Fields, 30

    Multiple Copies, 32

    Other Features, 32

    PRINT FIELD Prompts, 25

    Print File Entries Option, 14

    Qualifiers, 25

    Report Headings, 32

- Reports from Files, How to, 14
  - Saving Criteria in PRINT Templates, 28
  - Selecting Entries
    - All Entries with the Same Value for One Field to Print, 18
    - For Printing, 18
    - Other Ways to Print, 19
  - SORT BY** Fields, 34
    - Prompts, 20
    - Specifying, 16
  - Sorting, 16
    - Order, 17
    - Print Sort Criteria in the Heading or the Footer, 35
    - Qualifiers, 20
  - Specifying Fields to Print, 24
  - Specifying **SORT BY** Fields, 16
  - Standard Column Format, 15
  - Statistics Only, 31
  - Suppressing Report Headings (and Page Feeds), 33
  - Templates
    - CAPTIONED PRINT**, 30
    - Forcing the Creation of, 29
    - PRINT**, 28
    - Using and Editing, 29
  - Using and Editing **PRINT** Templates, 29
  - Print Fields, Choose Your Own, 11
  - Print Number of Matches Found, 44
  - PRINT TEMPLATE** file, 28
  - Programmer Edit
    - Line Editor, 132
  - Prompts
    - Default Responses, 61
    - Display Audit Trail, 10
    - Getting Online Help, 60
    - Include Computed Fields, 10
    - Incorrect Responses, 60
    - List of Choices, 64
    - Longer Default Responses, 62
    - Partial Responses, 61
    - PREFERRED EDITOR**, 110
    - PRINT FIELD**, 25
    - Replace... Prompt Shortcuts, 63
    - Replace...With, 126
      - Editor, 62
      - Shortcuts, 127
    - Responding to, 59
    - SORT BY** Fields, 20
    - Special Responses to Field Prompts, 66
    - Standard Prompt Structure, 59
    - VA FileMan, 58
  - PROVIDER** File (#6), 81
  - PS Anonymous Directories, xxiv
- ## Q
- Question Mark Help, xxiii, 60
  - Quotes
    - Use When Adding a
      - Duplicate Record, 86
      - Duplicate-Named Entry, 90
- ## R
- Reader
    - Assumptions, xxiii
  - Recall (Spacebar), 68
  - Recognizing the Line Editor, 124
  - Records
    - Add a Record, 85
    - Add a Record at a **POINTER TO A FILE** Field, 89

## Index

- Adding a
  - Duplicate, 86
  - Duplicate-Named Entry, 90
- Adding and Deleting, 85
- Delete a Record, 86
- Editing, 56
- Repointing When Deleting Records, 87
- Records, Fields, and Files, 1
- Reference
  - Print Qualifiers, 25
  - Sort Qualifiers, 20
- Reference Materials, xxiii
- Repeating Blocks
  - ScreenMan, 105
- Replace... Prompt Shortcuts, 63
- Replace...With Editor, 62, 72, 126, 127
- Repointing When Deleting Records, 87
- Report Headings, 32
- Required (Mandatory) Fields, 67
- Requirements
  - Legal, xix
- Responding to Prompts, 59
- Responses
  - Default Entry, 61
  - Incorrect Entry, 60
  - Longer Default Entry, 62
  - Partial Entry, 61
- Return/Enter Key (<Enter>), 58
- Reusing
  - Search
    - Criteria, 43
    - Results in a Print, 43
    - Results in Another Search, 43
    - Sort Criteria in New Reports, 24
- Revising Text in the Line Editor, 125
- Revision History, iii
- S**
- Saving
  - Print Criteria in PRINT Templates, 28
  - Screen Editor, 115
  - ScreenMan, 98
  - Search Criteria in SEARCH Templates, 43
  - Sort Criteria in SORT Templates, 23
- Screen Editor, 112
  - Avoiding Lost Characters, 122
  - Characters Lost, Avoiding, 122
  - Cursor Movement (Navigation Keystrokes), 114
  - Cutting and Pasting, 117
  - Deleting, 118
  - Entering
    - Commands, 113
    - Text, 113
  - Exiting and Saving, 115
  - Files, Save as Text, 121
  - Finding Text, 115
  - Formatting Paragraphs, 116
  - How to Exit When PF Keys Not Working, 120
  - Modes/Settings, 119
  - Navigation Keystrokes, 114
  - Pasting and Cutting, 117
  - Pasting and Uploading, 121
  - Personal Computers, 121
  - Saving and Exiting, 115
  - Screen, 113
  - Settings/Modes, 119
  - Symbol Characters, 121
  - Terminal Type Setting, 120

- Troubleshooting, 120
- Uploading, 121
- Wrap Vs. No Wrap, 121
- Screen Mode vs. Scrolling Mode, 4
- ScreenMan, 95
  - Adding a
    - New Entry to a Multiple, 104
  - Command Line Options, 99
  - Cursor Movement (Navigation Keystrokes), 97, 100
  - Deleting, 101
  - Deleting an Entry in a Multiple, 104
  - Details, 106
  - Differences from Scrolling Mode Editing, 95
  - Editing, 100
  - Exiting a Subpage, 103
  - Exiting and Saving, 98
  - How to
    - Edit Fields, 100
    - File Edits, 106
    - Navigate Between Fields, 97
    - Navigate Between Pages, 98
  - Long Fields, 102
  - Modes, 101
  - Multiples (Subfiles), 102
    - In Repeating Blocks, 105
    - Linked to "Popup" Subpages, 103
  - Navigation Keystrokes, 97
  - Navigational Keys for Repeating Blocks, 106
  - Repeating Blocks, 105
  - Saving and Exiting, 98
  - Screen, 96
  - Shortcut Keys, 99
  - Similarities with Scrolling Mode Editing, 95
- Troubleshooting, 107
- WORD-PROCESSING Fields, 102
- Zoom Editor, 102
- Scrolling Mode vs. Screen Mode, 4
- Search, 36
  - Browser, 52
  - Combine Conditions, 39
  - Conditions, 37
    - Tests, 37
  - External vs. Internal Field Values in Search Conditions, 44
  - Format Output, 41
  - How to Search, 36
  - Internal vs. External Field Values in Search Conditions, 44
  - Multiples (Subfiles), 45
  - Operators for Combining Search Conditions, 39
  - Print Number of Matches Found, 44
  - Reusing
    - Search Criteria, 43
    - Search Results in a Print, 43
    - Search Results in Another Search, 43
  - Saving Criteria in SEARCH Templates, 43
  - Steps, 37
    - Combine Conditions, 39
    - Entering Conditions, 37
    - Format Output, 41
  - Subfiles (Multiples), 45
  - Templates, 42, 43
    - Creating, 43
    - Reusing
      - Search Criteria, 43
      - Search Results in a Print, 43
      - Search Results in Another Search, 43
  - Select Entries for Printing

## Index

- Sorting, 18
  - Select Your Preferred Editor, How to, 110
  - Selecting All Entries with the Same Value for One Field to Print, 18
  - Selecting Entries Other Ways to Print, 19
  - SET OF CODES Data Type Fields, 76
  - Settings
    - Screen Editor, 119
  - Shortcuts
    - Line Editor, 126
    - Replace... Prompt, 63
    - Replace...With Prompt, 127
    - ScreenMan, 99
  - Similarities with Scrolling Mode Editing
    - ScreenMan, 95
  - Sort
    - Canonic Numbers and Non-Canonic Strings, 17
    - Forcing Creation of a SORT Template, 23
    - Including Null Fields in Your Sort, 19
    - Non-Canonic Strings and Canonic Numbers, 17
    - Order Before Printing, 17
    - Qualifiers, 20
      - TXT, 17
    - Reusing Sort Criteria in New Reports, 24
    - Saving Criteria in SORT Templates, 23
    - Searching, 42
    - Select Entries for Printing, 18
    - SORT BY Fields
      - Prompts, 20
      - Specifying, 16
    - Sorting Before Printing, 16
    - Specifying SORT BY Fields, 16
    - Templates, 10, 23
      - Forcing the Creation of, 23
      - Reusing Sort Criteria in New Reports, 24
    - SORT BY Fields, 34
    - SORT TEMPLATE file, 23, 42, 43
    - Spacebar Recall, 68
    - Special Responses to Field Prompts, 66
    - Specifying Fields to
      - Print, 24
      - Sort, 16
    - Specifying SORT BY Fields, 16
    - Standard Captioned Output, 10
    - Standard Column Format for VA FileMan Prints, 15
    - Standard Prompt Structure, 59
    - STATE File (#5), 80, 81
    - Statistics Only in Printing, 31
    - Steps in Searching, 37
    - Subfields, 83
    - Subfiles (Multiples)
      - Adding and Deleting from, 91
      - DATA TYPE Fields, 83
        - Adding and Deleting from, 91
        - Searching for, 45
    - Suppressing Report Headings (and Page Feeds), 33
    - Switching to Another Editor While Editing, 111
  - Symbols
    - Found in the Documentation, xx
    - Screen Editor, 121
- ## T
- Table of Contents, v
  - Tables, xi
  - TBOX, 110
  - Templates
    - CAPTIONED PRINT, 30

- PRINT, 28
  - Forcing the Creation of, 29
  - Using and Editing, 29
- SEARCH, 42, 43
  - Reusing
  - Search Criteria, 43
  - Search Results in a Print, 43
  - Search Results in Another Search, 43
- SORT, 10, 23
  - Forcing the Creation of, 23
  - Reusing Sort Criteria in New Reports, 24
- Terminal Type Setting
  - Screen Editor, 120
- Text-Terminator-String Change Option, 131
  - Line Editor, 131
- Times
  - Abbreviations, 75
  - Acceptable Formats, 74
- Toolbox Menu, 110
- Transfer Lines From Another Document Option, 133
- Transfer Text (from Another WORD-PROCESSING Field), 133
- Troubleshooting
  - Screen Editor, 120
  - ScreenMan, 107
- TXT Sort Qualifier, 17
- U**
- Up-arrow
  - Exiting at Prompts, 67
  - Inserting
    - Multiple-type Print Fields, 30
  - Jumping to Another Field, 66
  - ScreenMan, 98
- Uploading ASCII Text, File Transfer from Foreign CPU
  - Line Editor, 130
- Uploading Text with Blank Lines
  - Line Editor, 131
- URLs
  - Acronyms Intranet Website, 142
  - Adobe Website, xxiv
  - Glossary Intranet Website, 142
  - VA Software Document Library (VDL) Website, xxiv
  - VistA Development Website, xx
- Using and Editing PRINT Templates, 29
- V**
- VA FileMan
  - Prompts, 58
  - What is it?, xvii
- VA Software Document Library (VDL)
  - Website, xxiv
- VARIABLE-POINTER DATA TYPE Fields, 81
- W**
- Websites
  - Acronyms Intranet Website, 142
  - Adobe Website, xxiv
  - Glossary Intranet Website, 142
  - VHA Software Document Library (VDL), xxiv
  - VistA Development Website, xx
- What is VA FileMan?, xvii
- Word Processing Editors, Choices, 110
- WORD-PROCESSING Data Type Fields, 77
- WORD-PROCESSING Fields, 108
  - ScreenMan, 102
- Wrap Vs. No Wrap

Index

Screen Editor, 121

**Y**

Y-Programmer Edit Option, 132

**Z**

Zoom Editor

ScreenMan, 102



